

A photograph of a small, rustic wooden sauna with a thick layer of green moss on its roof. The sauna is situated in a dense forest of tall, thin trees. In the background, a calm lake is visible through the trees. A wooden deck with a railing is in the foreground on the right. The text 'PRODUCT CATALOGUE' is written in large, white, sans-serif capital letters, and 'SAUNA and STEAM' is written in smaller, white, sans-serif capital letters below it.

PRODUCT CATALOGUE

SAUNA and STEAM





**S
A
W
O**



Table of Contents

Sauna Heaters

Tower Series	1
SAWO30 Heaters	2
Tower Heaters	10
Aries Heaters	18
Cubos	26
Phoenix	29
Heaterking	31
Fiberjungle	34
Floor Series	35
Nordex Pro	36
Nordex Pro Combi	37
Nordex S	38
Nordex S Combi	39
Nordex Floor	40
Krios Floor	41
Helius	42
Taurus D	44
Taurus D Combi	46
Savonia	48
Savonia Combi	49
Wall-Mounted Series	50
Mini, Mini X and Mini Combi	51
Scandia	53
Scandia Combi	54
Krios	55
Nordex	57
Nordex Combi	58
Nordex Mini	59
Nordex Mini Combi	60
Scandifire	62
Minidragon	63
Stone Series	65
Nimbus	66
Nimbus Combi	67
Cumulus	68
Heater Accessories	69

Sauna Controls

SAWO Sense	71
Saunova 2.0 PLUS	72
Saunova Controls	73
Innova Controls	74

Sauna Accessories

Accessory Sets	78
Pail Shower	80
Pails	81
Ladles	82
Thermometers and Combined Meters . . .	83
Clocks, Sandtimers, Headrests and Backrests	84
Sauna Furnishings	85
Door Handles and Ventilation	86
Display Stand Wall and Add Ons	87
Doors	88
Kivistone	90

Steam Sauna

STN-S Steam Generator	92
STN-W Steam Generator	93
STN Steam Generator	94
STE Steam Generator	96
Steam Generator Controls	98

SAUNA Heaters

With over 30 years of experience manufacturing sauna products, SAWO offers a wide variety of tower, stone, wall-mounted, floor, and combi heaters.

A good starting point is to define the size of the sauna, choosing the corresponding kW option and the preferred control option.

Everything else is up to individual *löyly* and heater style preferences.

TOWER Series

SAWO Tower heaters are best described as “sauna stone pillars.” Strong, stainless steel rings hold massive amounts of stones. These heaters are designed to circulate steam evenly from the lowest to the highest part of the sauna room.




SAWO30 Heaters


SAWO30 heaters celebrate the 30-year journey of the SAWO brand. Designed with precision and elegance, they combine robust performance with a sleek, modern aesthetic. The SAWO30 makes a striking centerpiece for any sauna, and its height ensures even heat circulation from top to bottom. SAWO30 heaters are available in three models: Round, Corner, and Wall.




Round



Wall



Corner

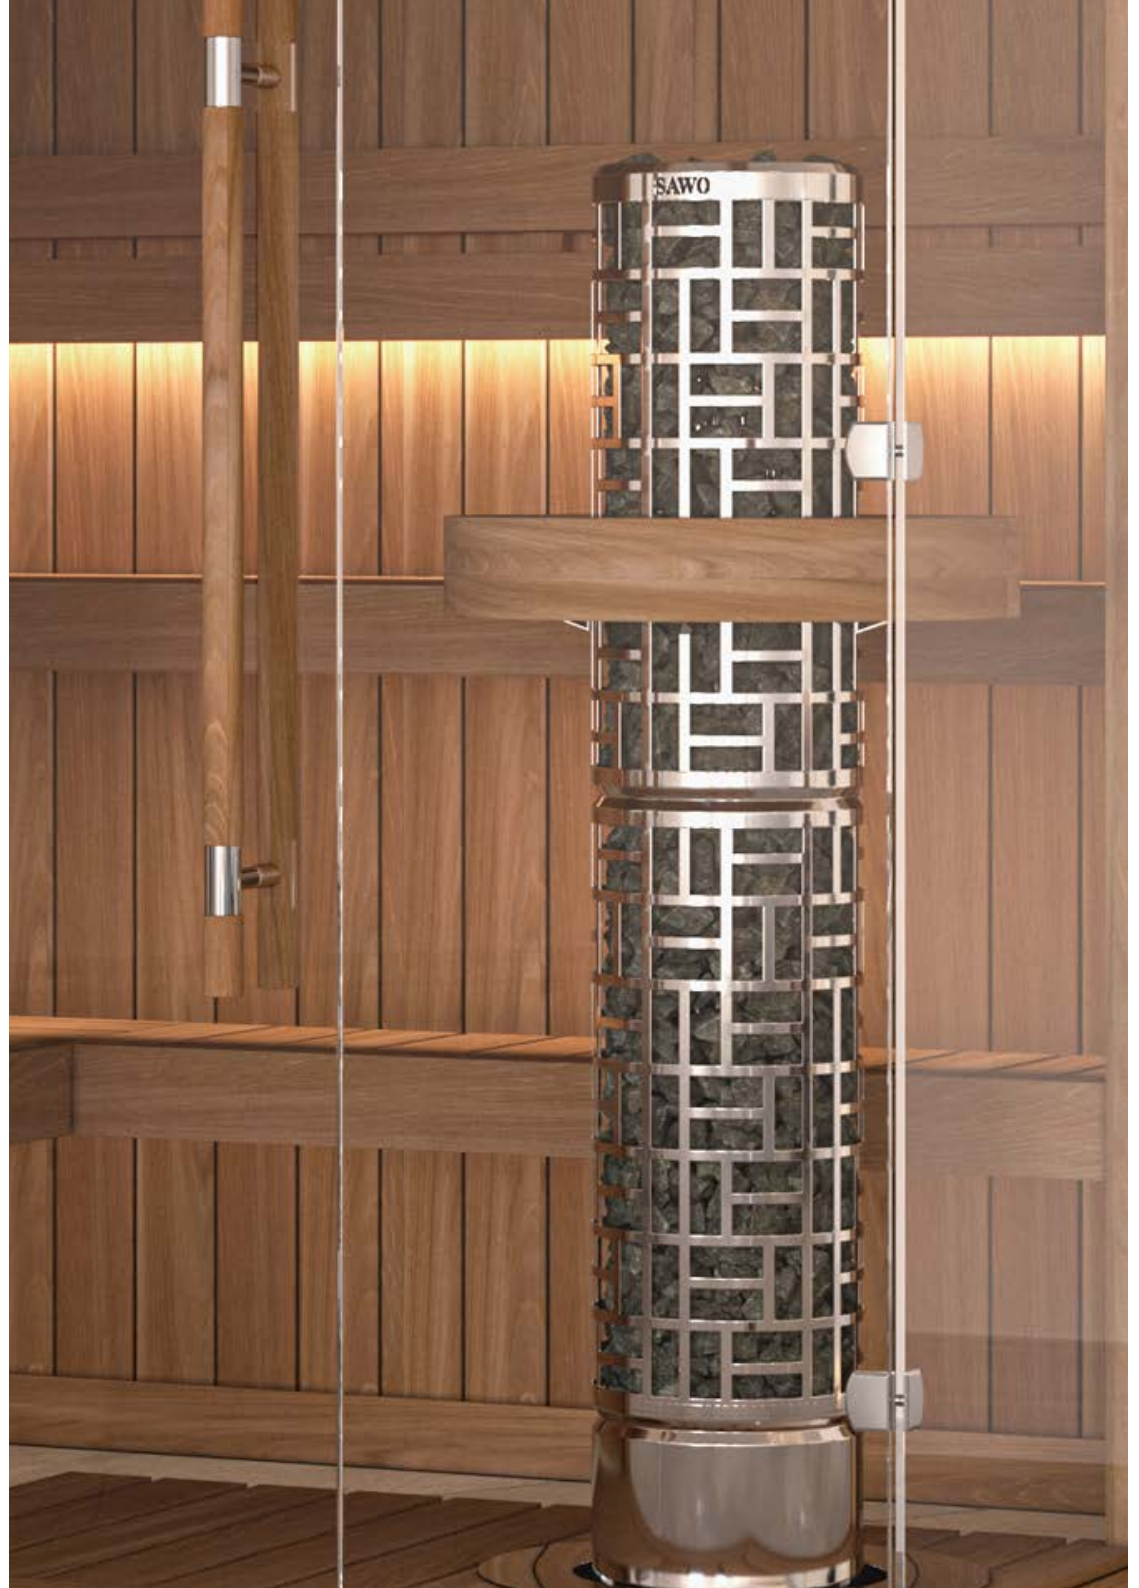



SAWO30 Round

- » Power range: 4,5 – 24,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS) and Built-in (NB)
- » Casing: stainless steel or black steel
- » Easier loading of stones with separating middle part
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integrated collar



SAWO30 Wall

- » Power range: 4,5 – 24,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS) and Built-in (NB)
- » Casing: stainless steel or black steel
- » Easier loading of stones with separating middle part
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integrated collar



SAWO30 Corner

- » Power range: 4,5 – 12,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS) and Built-in (NB)
- » Casing: stainless steel or black steel
- » Easier loading of stones with separating middle part
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integrated collar



SAWO30 Round

SAWO30 Round is a magnificent-looking heater that can be placed perfectly in the middle of the sauna or embedded into benches.

The large amount of stones in the tall sleek body creates a rich, steam-infused atmosphere with an ideal combination of steam and humidity.





SAWO30 Round
(Ni2)



SAWO30 Round Black
(Ni2)



SAWO30 Round
(NS)



SAWO30 Round Black
(NS)



SAWO30 Round
(NB)



SAWO30 Round Black
(NB)

Saunova (Ni2)


HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45Ni2-P-C SW3-45Ni2-BL-P-C	4,5	3	6	245	245	1305	70	60	Saunova	100	1900
SW3-60Ni2-P-C SW3-60Ni2-BL-P-C	6,0	5	8	245	245	1305	70	60	Saunova	100	1900
SW6-90Ni2-P-C SW6-90Ni2-BL-P-C	9,0	8	15	345	345	1305	160	100	Saunova	100	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NS-P-C SW3-45NS-BL-P-C	4,5	3	6	245	245	1305	70	60	separate	100	1900
SW3-60NS-P-C SW3-60NS-BL-P-C	6,0	5	8	245	245	1305	70	60	separate	100	1900
SW6-90NS-P-C SW6-90NS-BL-P-C	9,0	8	15	345	345	1305	160	100	separate	100	1900
SW6-120NS-P SW6-120NS-BL-P	12,0	11	18	345	345	1305	160	100	separate	100	2100
SW12-180NS-P SW12-180NS-BL-P	18,0	18	30	515	515	1305	360	220	separate	100	2300
SW12-210NS-P SW12-210NS-BL-P	21,0	22	35	515	515	1305	360	220	separate	100	2300
SW12-240NS-P SW12-240NS-BL-P	24,0	24	40	515	515	1305	360	220	separate	100	2300

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NB-P-C SW3-45NB-BL-P-C	4,5	3	6	245	245	1305	70	60	built-in (8+4h)	100	1900
SW3-60NB-P-C SW3-60NB-BL-P-C	6,0	5	8	245	245	1305	70	60	built-in (8+4h)	100	1900
SW6-90NB-P-C SW6-90NB-BL-P-C	9,0	8	15	345	345	1305	160	100	built-in (8+4h)	100	1900

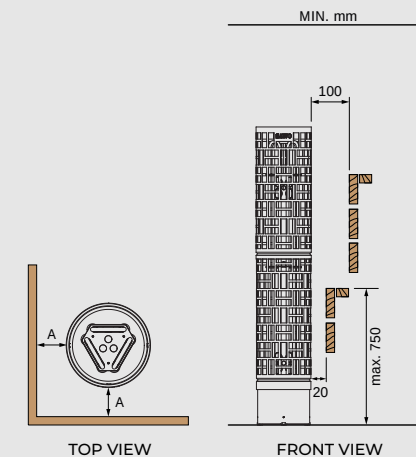

Minimum Safety Distances

Heater Accessories (Optional)

Integration Collars for Round



Stainless



Wooden
Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST2	460	460	45
TH-COLLAR-ST6	640	640	45
TH-COLLAR-ST12	820	820	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W2-D A	440	440	45
TH-COLLAR-W6-D A	540	540	45
TH-COLLAR-W12-D A	685	685	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S2	510	510	45
TH-COLLAR-S6	620	620	45
TH-COLLAR-S12	790	790	45


Heater Guards for Round



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
SW-GUARD-W2-D A	510	510	90
SW-GUARD-W6-D A	620	620	90
SW-GUARD-W12-D A	790	790	90


HEATERS
SW3
SW6
SW12

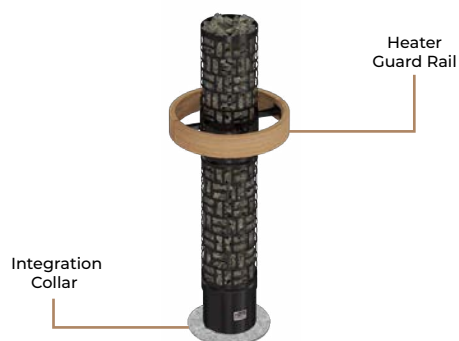

SAWO30 Wall

SAWO30 Wall is perfect for saving space while being very easy on the eyes.

The large amount of stones in the tall sleek body enables rich, steam-infused atmosphere with an ideal combination of steam and humidity.

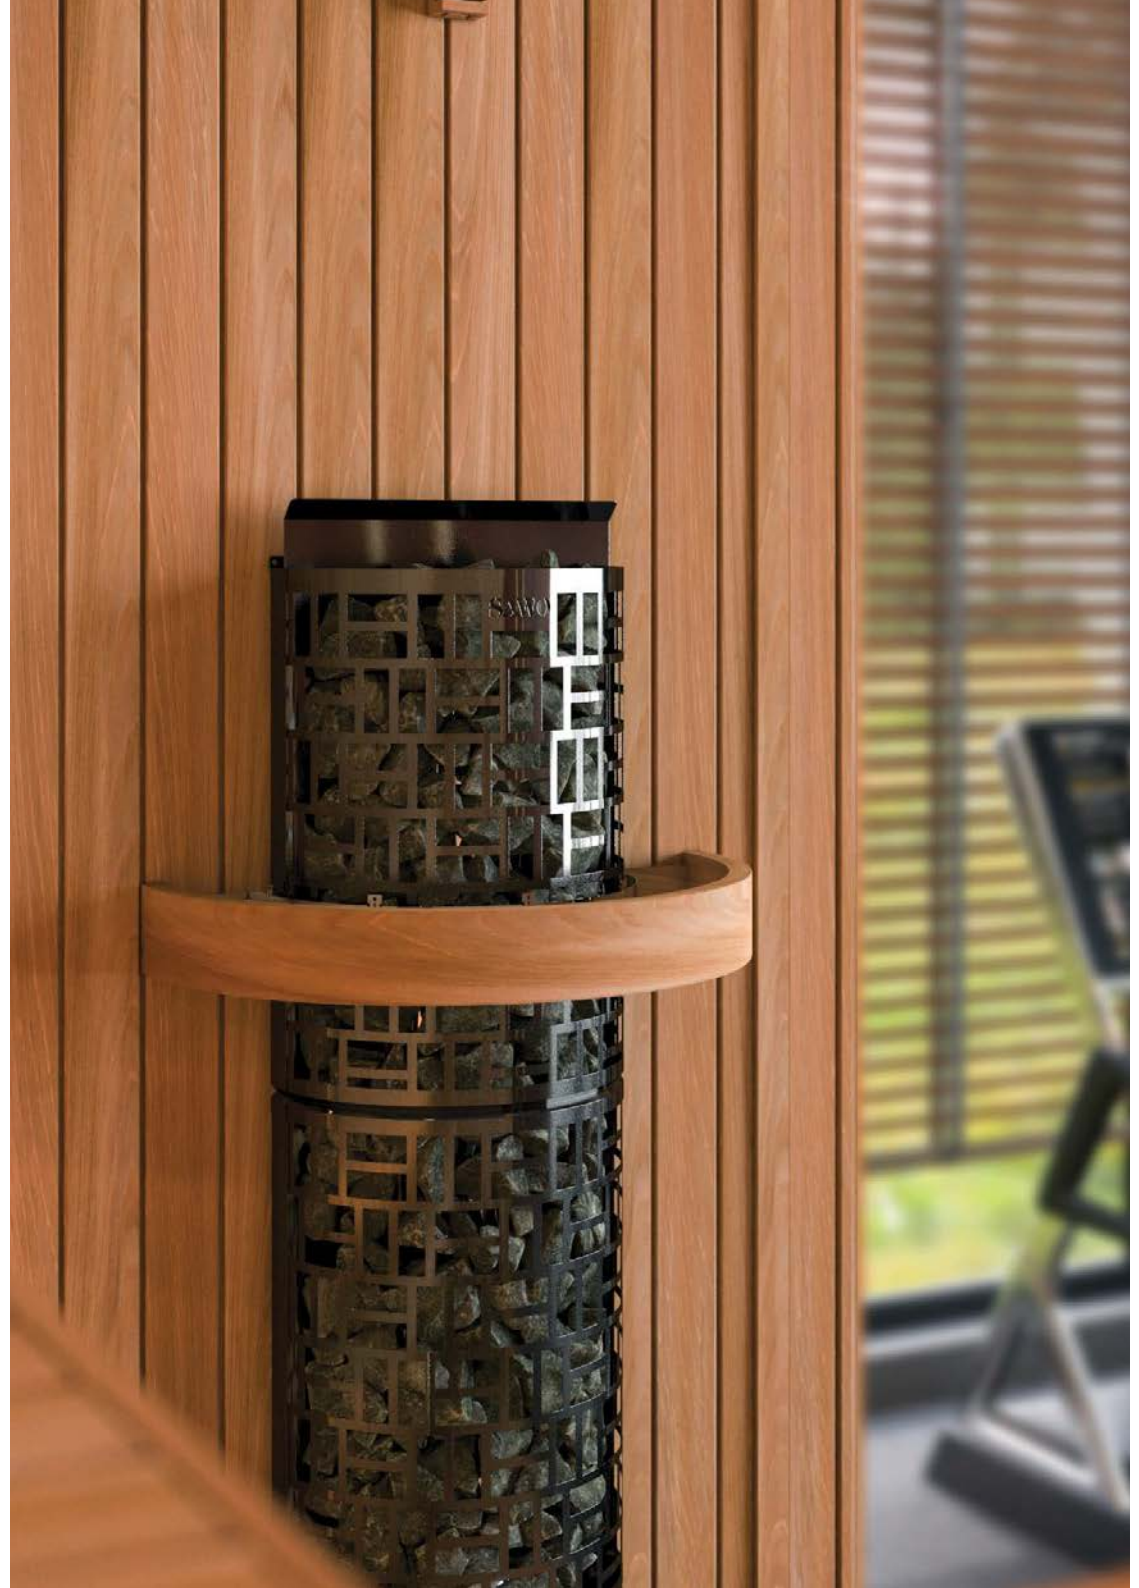



SAWO30 Wall
(Ni2)



SAWO30 Wall Black
(Ni2)



SAWO30 Wall
(NS)



SAWO30 Wall Black
(NS)



SAWO30 Wall
(NB)



SAWO30 Wall Black
(NB)

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45Ni2-WL-P-C SW3-45Ni2-WL-BL-P-C	4,5	3	6	*230	385	1395	70	60	Saunova	100	1900
SW3-60Ni2-WL-P-C SW3-60Ni2-WL-BL-P-C	6,0	5	8	*230	385	1395	70	60	Saunova	100	1900
SW6-90Ni2-WL-P-C SW6-90Ni2-WL-BL-P-C	9,0	8	15	*250	475	1395	160	100	Saunova	100	1900


Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NS-WL-P-C SW3-45NS-WL-BL-P-C	4,5	3	6	*210	390	1375	70	60	separate	100	1900
SW3-60NS-WL-P-C SW3-60NS-WL-BL-P-C	6,0	5	8	*210	390	1375	70	60	separate	100	1900
SW6-90NS-WL-P-C SW6-90NS-WL-BL-P-C	9,0	8	15	*290	540	1375	160	100	separate	100	1900
SW6-120NS-WL-P SW6-120NS-WL-BL-P	12,0	11	18	*290	540	1375	160	100	separate	100	2100
SW12-180NS-WL-P SW12-180NS-WL-BL-P	18,0	18	30	*430	780	1375	250	165	separate	100	2300
SW12-210NS-WL-P SW12-210NS-WL-BL-P	21,0	22	35	*430	780	1375	250	165	separate	100	2300
SW12-240NS-WL-P SW12-240NS-WL-BL-P	24,0	24	40	*430	780	1375	250	165	separate	100	2300


*Depth when installed to the wall.

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NB-WL-P-C SW3-45NB-WL-BL-P-C	4,5	3	6	*230	385	1395	70	60	built-in (8+4h)	100	1900
SW3-60NB-WL-P-C SW3-60NB-WL-BL-P-C	6,0	5	8	*230	385	1395	70	60	built-in (8+4h)	100	1900
SW6-90NB-WL-P-C SW6-90NB-WL-BL-P-C	9,0	8	15	*250	475	1395	160	100	built-in (8+4h)	100	1900

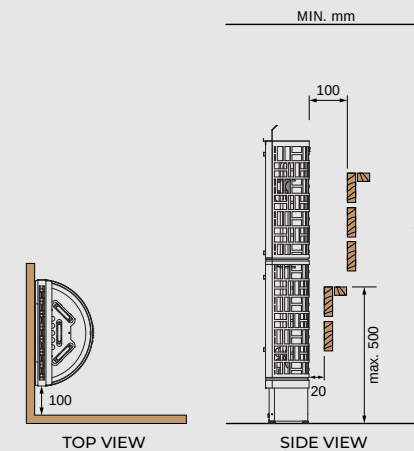

Minimum Safety Distances

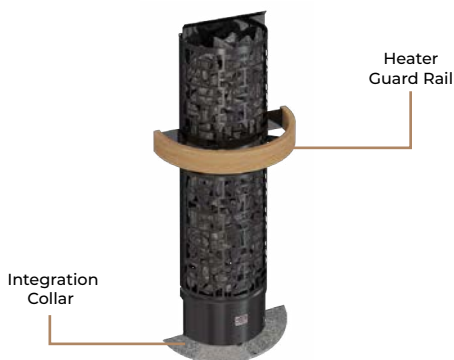

Heater Accessories (Optional)

Integration Collars for Wall



Stainless



Wooden
Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-ST2-WL	355	650	45
TH-COLLAR-ST6-WL	445	830	45
TH-COLLAR-ST12-WL	535	1010	45

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-W2-WL-D A	345	630	45
TH-COLLAR-W6-WL-D A	425	790	45
TH-COLLAR-W12-WL-D A	545	1030	45

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-S2-WL	345	635	45
TH-COLLAR-S6-WL	425	795	45
TH-COLLAR-S12-WL	545	1035	45

Heater Guards for Wall




Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
SW-GUARD-W2-WL-D A	335	615	90
SW-GUARD-W6-WL-D A	410	795	90

HEATERS
SW3
SW6
SW12

SAWO30 Corner

SAWO30 Corner is designed for making the most out of limited sauna space without having to compromise. The large amount of stones in the tall sleek body creates a rich, steam-infused atmosphere with an ideal combination of steam and humidity.

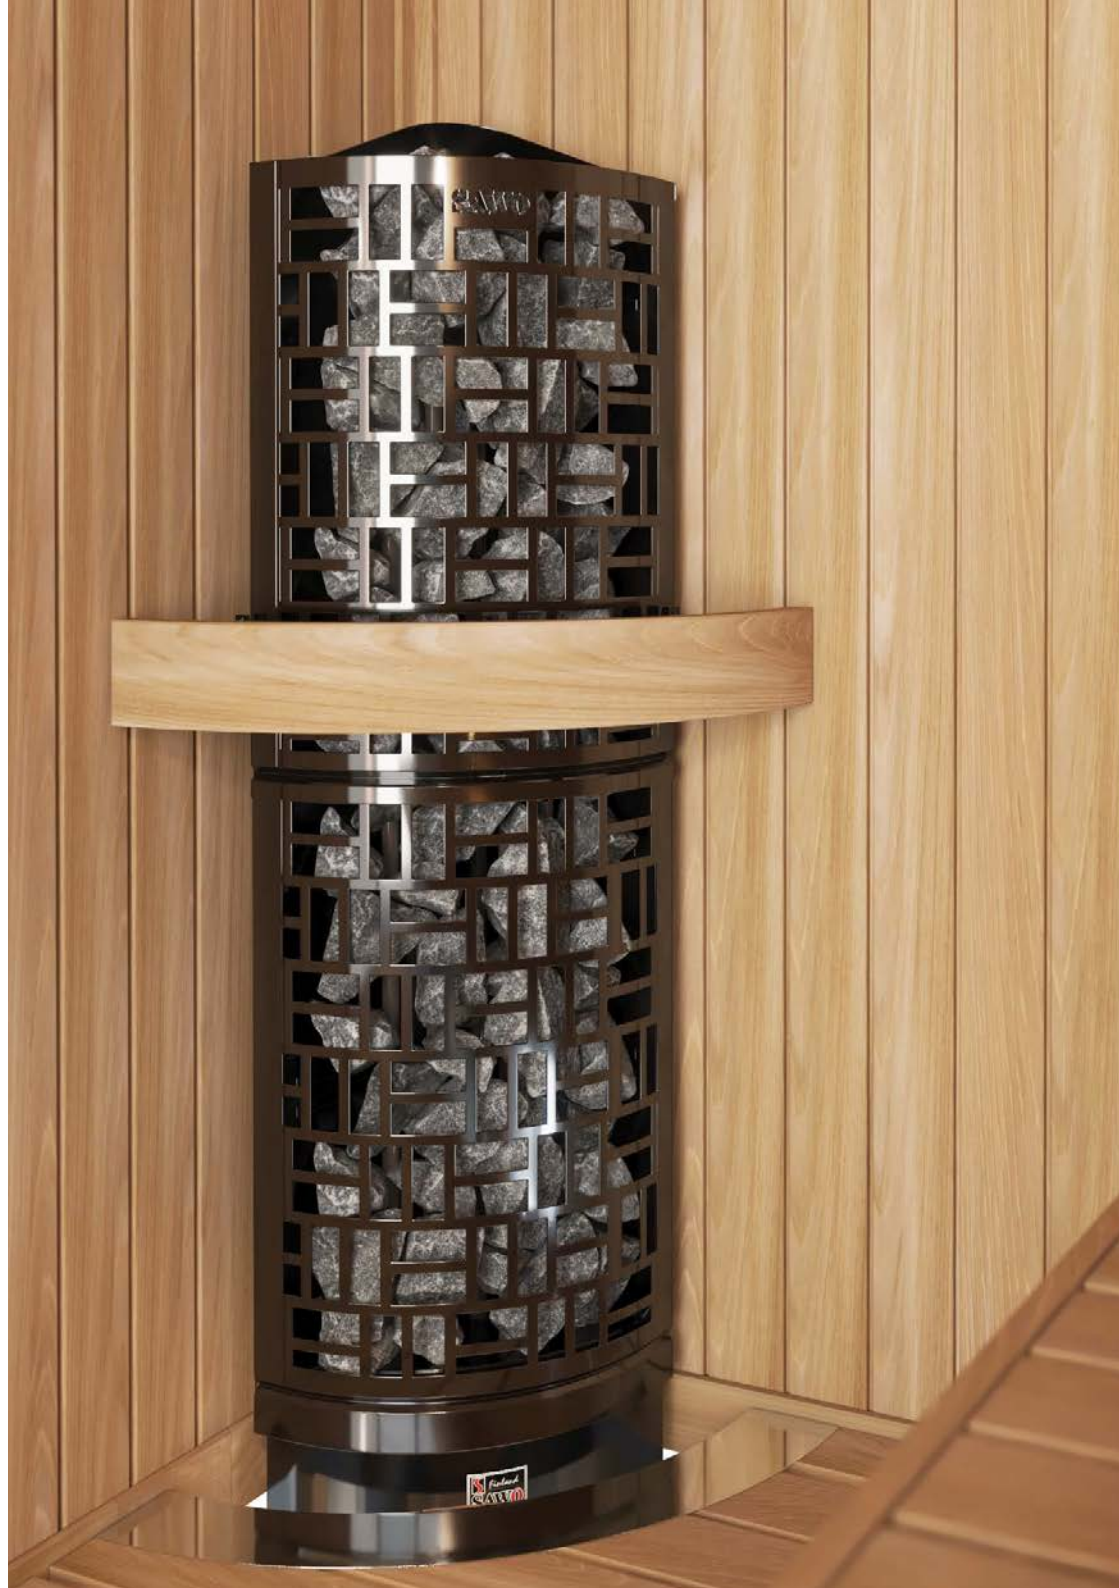



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45Ni2-CNR-P-C SW3-45Ni2-CNR-BL-P-C	4,5	3	6	*300	300	1380	70	45	Saunova	100	1900
SW3-60Ni2-CNR-P-C SW3-60Ni2-CNR-BL-P-C	6,0	5	8	*300	300	1380	70	45	Saunova	100	1900
SW6-90Ni2-CNR-P-C SW6-90Ni2-CNR-BL-P-C	9,0	8	15	*415	415	1380	105	80	Saunova	100	1900



Saunova/Innova (NS)


HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NS-CNR-P-C SW3-45NS-CNR-BL-P-C	4,5	3	6	*300	300	1380	70	45	separate	100	1900
SW3-60NS-CNR-P-C SW3-60NS-CNR-BL-P-C	6,0	5	8	*300	300	1380	70	45	separate	100	1900
SW6-90NS-CNR-P-C SW6-90NS-CNR-BL-P-C	9,0	8	15	*415	415	1380	105	80	separate	100	1900
SW6-120NS-CNR-P SW6-120NS-CNR-BL-P	12,0	11	18	*415	415	1380	105	80	separate	100	2100




Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NB-CNR-P-C SW3-45NB-CNR-BL-P-C	4,5	3	6	*300	300	1380	70	45	built-in (8+4h)	100	1900
SW3-60NB-CNR-P-C SW3-60NB-CNR-BL-P-C	6,0	5	8	*300	300	1380	70	45	built-in (8+4h)	100	1900
SW6-90NB-CNR-P-C SW6-90NB-CNR-BL-P-C	9,0	8	15	*415	415	1380	105	80	built-in (8+4h)	100	1900

*Depth when installed to the wall.

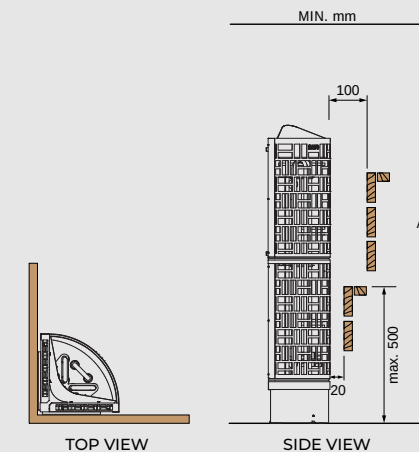

Minimum Safety Distances

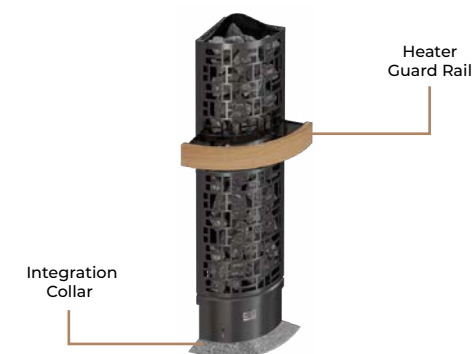

Heater Accessories (Optional)

Integration Collars for Corner



Stainless



Wooden

Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST2-CNR	220	670	45
TH-COLLAR-ST6-CNR	245	795	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W2-CNR-D A	200	600	45
TH-COLLAR-W6-CNR-D A	235	755	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S2-CNR	425	425	45
TH-COLLAR-S6-CNR	535	535	45

Heater Guards for Corner



Wooden

Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
SW-GUARD-W2-CNR-D A	210	580	90
SW-GUARD-W6-CNR-D A	245	755	90

HEATERS
SW3 SW6


Tower Heaters

Tower heaters are developed to produce steam from the lowest to the highest part of the sauna, similarly to a smoke sauna.


Our Tower heaters are equipped with a removable stone spacer, which allows for high temperatures while saving electricity due to reduced heating time. The stone spacer improves air flow in the heater and helps extend the heating elements' life span as the stones do not touch the elements.

When the stone spacer is not used, the *löyly* is milder and softer.


The Tower heaters come in Round, Wall, and Corner models.




Round



Wall



Corner

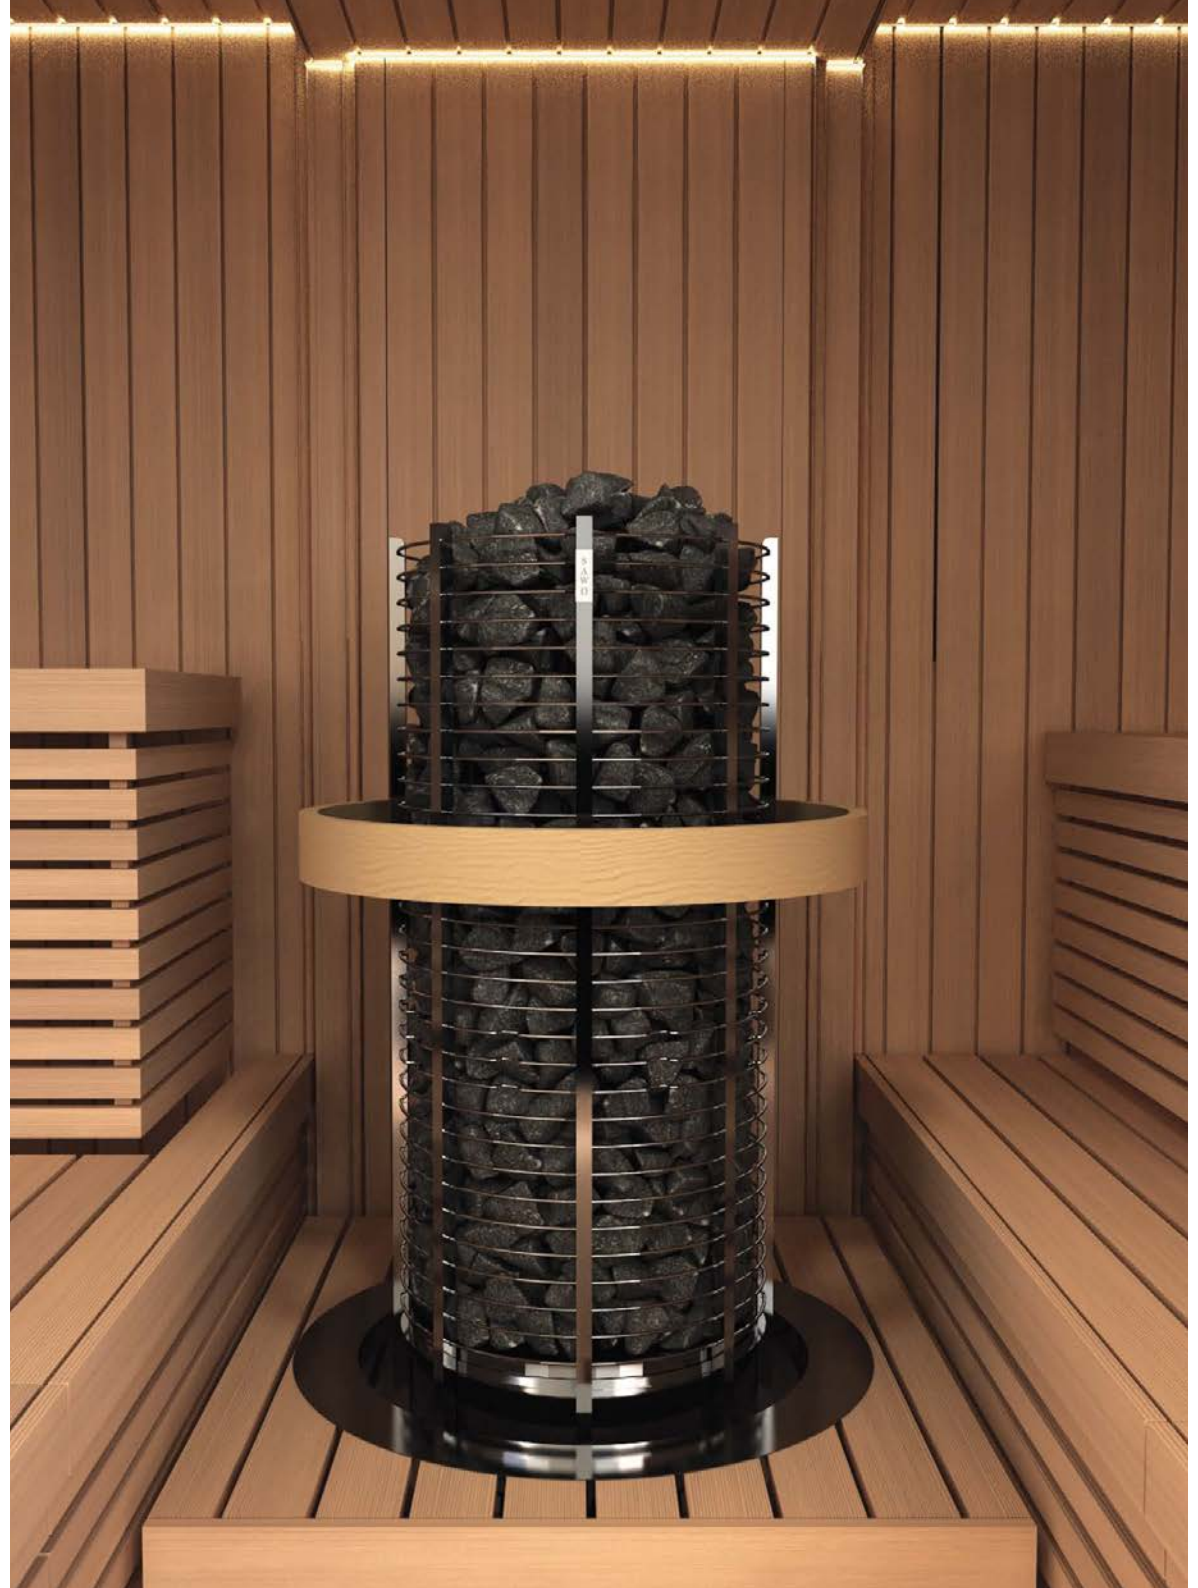



Tower ROUND

- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova (Ni2), Innova (Ni), Saunova/Innova (NS) and Built-in (NB)
- » Casing: Stainless steel
- » Moving steel rings for replacement of broken stones
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integration collar



Tower WALL

- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova (Ni2), Innova (Ni), Saunova/Innova (NS) and Built-in (NB)
- » Casing: Stainless steel
- » Moving rings for replacement of broken stones
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integration collar



Tower CORNER

- » Power range: 3,0 – 12,0kW
- » Available controls: Saunova (Ni2), Innova (Ni), Saunova/Innova (NS) and Built-in (NB)
- » Casing: Stainless steel
- » Moving upper part for replacement of broken stones
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integration collar

Tower Round

Tower Round is a timelessly elegant heater that releases long-lasting mild, steady, and humid heat.

The Round model can be placed perfectly in the middle of the sauna or embedded into benches.





Tower Round
(Ni2)

Tower Round
(Ni)



Tower Round
(NB)


Tower Round
(NS)

Saunova (Ni2) and Innova (Ni)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30Ni2-P-C	3,0	2	4	260	260	1300	70	60	Saunova	100	1900
TH3-35Ni2-P-C	3,5	3	6	260	260	1300	70	60	Saunova	100	1900
TH3-45Ni2-P-C	4,5	3	6	260	260	1300	70	60	Saunova	100	1900
TH3-60Ni2-P-C	6,0	5	8	260	260	1300	70	60	Saunova	150	1900
TH4-60Ni2-P-C	6,0	5	9	315	315	1300	105	90	Saunova	150	1900
TH5-80Ni2-P-C	8,0	8	14	315	315	1300	105	90	Saunova	150	1900
TH5-90Ni2-P-C	9,0	8	14	315	315	1300	105	90	Saunova	150	1900
TH6-80Ni2-P-C	8,0	7	14	365	365	1300	160	100	Saunova	150	1900
TH6-90Ni2-P-C	9,0	8	15	365	365	1300	160	100	Saunova	150	1900
TH6-105Ni-P	10,5	9	16	365	365	1300	160	100	Innova	150	1900
TH6-120Ni-P	12,0	11	18	365	365	1300	160	100	Innova	200	2100
TH9-105Ni-P	10,5	10	16	450	450	1300	230	165	Innova	150	2100
TH9-120Ni-P	12,0	11	20	450	450	1300	230	165	Innova	150	2100
TH9-150Ni-P	15,0	14	25	450	450	1300	230	165	Innova	200	2100
TH12-150Ni-P	15,0	15	26	545	545	1300	360	220	Innova	200	2300
TH12-180Ni-P	18,0	18	30	545	545	1300	360	220	Innova	200	2300
TH12-210Ni-P	21,0	22	35	545	545	1300	360	220	Innova	200	2300
TH12-240Ni-P	24,0	24	40	545	545	1300	360	220	Innova	200	2300


Built-in (NB) and Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30NB-P NS-P	3,0	2	4	260	260	1300	70	60	separate	100 150	1900
TH3-35NB-P-C NS-P-C	3,5	3	6	260	260	1300	70	60	built-in (8+4h) separate	150 100	1900
TH3-45NB-P-C NS-P-C	4,5	3	6	260	260	1300	70	60	built-in (8+4h) separate	150 100	1900
TH3-60NB-P-C NS-P-C	6,0	5	8	260	260	1300	70	60	built-in (8+4h) separate	150 150	1900
TH4-60NB-P-C NS-P-C	6,0	5	9	315	315	1300	105	90	built-in (8+4h) separate	150 150	1900
TH5-80NB-P-C NS-P-C	8,0	7	13	315	315	1300	105	90	built-in (8+4h) separate	100 100	1900
TH5-90NB-P-C NS-P-C	9,0	8	14	315	315	1300	105	90	separate	150	1900
TH6-80NB-P-C NS-P-C	8,0	7	14	365	365	1300	160	100	built-in (8+4h) separate	100 100	1900
TH6-90NB-P-C NS-P-C	9,0	8	15	365	365	1300	160	100	built-in (8+4h) separate	100 100	1900
TH6-105NS-P	10,5	9	16	365	365	1300	160	100	separate	150	1900
TH6-120NS-P	12,0	11	18	365	365	1300	160	100	separate	200	2100
TH9-105NS-P	10,5	10	16	450	450	1300	230	165	separate	150	2100
TH9-120NS-P	12,0	11	20	450	450	1300	230	165	separate	150	2100
TH9-150NS-P	15,0	14	25	450	450	1300	230	165	separate	200	2100
TH9-180NS-P	18,0	18	28	450	450	1300	230	165	separate	200	2100
TH12-150NS-P	15,0	15	26	545	545	1300	360	220	separate	200	2300
TH12-180NS-P	18,0	18	30	545	545	1300	360	220	separate	200	2300
TH12-210NS-P	21,0	22	35	545	545	1300	360	220	separate	200	2300
TH12-240NS-P	24,0	24	40	545	545	1300	360	220	separate	200	2300

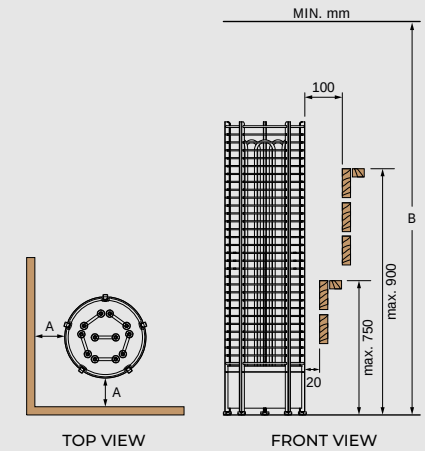

Minimum Safety Distances

Heater Accessories (Optional)

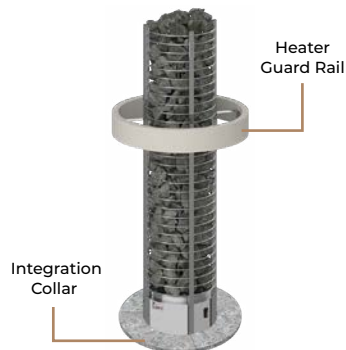

Stainless steel
(for TH4 and TH5)



Stainless steel



Wooden
Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
TH-COLLAR-V2-ST4	420 420 105

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
TH-COLLAR-ST2	460 460 45
TH-COLLAR-ST4	540 540 45
TH-COLLAR-ST6	640 640 45
TH-COLLAR-ST9	720 720 45
TH-COLLAR-ST12	820 820 45

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
TH-COLLAR-W2-D A	440 440 45
TH-COLLAR-W4-D A	485 485 45
TH-COLLAR-W6-D A	540 540 45
TH-COLLAR-W9-D A	560 560 45
TH-COLLAR-W12-D A	685 685 45

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
TH-COLLAR-S2	507 507 45
TH-COLLAR-S4	560 560 45
TH-COLLAR-S6	620 620 45
TH-COLLAR-S9	690 690 45
TH-COLLAR-S12	790 790 45

Heater Guards for Round



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
TH-GUARD-W2-D A	510 510 45
TH-GUARD-W4-D A	560 560 45
TH-GUARD-W6-D A	620 620 45
TH-GUARD-W9-D A	690 690 45
TH-GUARD-W12-D A	790 790 45

MODEL
TH2 TH3 TH4 TH5 TH6 TH9 TH12

Tower Wall

Tower Wall is a timelessly elegant heater that releases long-lasting mild, steady and humid heat. The Wall model is a wonderful space-saver while still being the show-stopper of the sauna.

To increase the heater's power output to over 24,0kW, two Wall heaters can be linked together for an output of up to 48,0kW.





Tower Wall
(Ni2)

Tower Wall
(Ni)



Tower Wall
(NB)

Tower Wall
(NS)


Saunova (Ni2) and Innova (Ni)

HEATER MODEL	kW	SAUNA ROOM MIN MAX (m³)		SIZE OF HEATER LENGTH WIDTH HEIGHT (mm)			STONES Without Stone Spacer With Stone Spacer (kg)		CONTROL	MINIMUM SAFETY DISTANCES A B	
TH2-30Ni2-WL-P-C	3,0	2	4	*230	385	1395	70	60	Saunova	100	1900
TH3-35Ni2-WL-P-C	3,5	3	6	*230	385	1395	70	60	Saunova	100	1900
TH3-45Ni2-WL-P-C	4,5	3	6	*230	385	1395	70	60	Saunova	100	1900
TH3-60Ni2-WL-P-C	6,0	5	8	*230	385	1395	70	60	Saunova	100	1900
TH4-60Ni2-WL-P-C	6,0	5	9	*250	475	1395	105	90	Saunova	100	1900
TH5-80Ni2-WL-P-C	8,0	8	14	*250	475	1395	105	90	Saunova	100	1900
TH5-90Ni2-WL-P-C	9,0	8	14	*250	475	1395	105	90	Saunova	100	1900
TH6-80Ni2-WL-P-C	8,0	7	14	*320	550	1395	160	100	Saunova	100	1900
TH6-90Ni2-WL-P-C	9,0	8	15	*320	550	1395	160	100	Saunova	100	1900
TH6-105Ni-WL-P	10,5	9	16	*320	550	1395	160	100	Innova	100	1900
TH6-120Ni-WL-P	12,0	11	18	*320	550	1395	160	100	Innova	100	2100
TH9-105Ni-WL-P	10,5	10	16	*355	650	1395	230	165	Innova	100	2100
TH9-120Ni-WL-P	12,0	11	20	*355	650	1395	230	165	Innova	100	2100
TH9-150Ni-WL-P	15,0	14	25	*355	650	1395	230	165	Innova	100	2100
TH12-150Ni-WL-P	15,0	15	26	*425	790	1395	360	220	Innova	100	2300
TH12-180Ni-WL-P	18,0	18	30	*425	790	1395	360	220	Innova	100	2300
TH12-210Ni-WL-P	21,0	22	35	*425	790	1395	360	220	Innova	100	2300
TH12-240Ni-WL-P	24,0	24	40	*425	790	1395	360	220	Innova	100	2300

Built-in (NB) and Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM MIN MAX (m³)		SIZE OF HEATER LENGTH WIDTH HEIGHT (mm)			STONES Without Stone Spacer With Stone Spacer (kg)		CONTROL	MINIMUM SAFETY DISTANCES A B	
TH2-30-NS-WL-P	3,0	2	4	*230	385	1395	70	60	built-in (8+4h) separate	100	1900
TH3-35-NB NS-WL-P-C	3,5	3	6	*230	385	1395	70	60	built-in (8+4h) separate	100	1900
TH3-45-NB NS-WL-P-C	4,5	3	6	*230	385	1395	70	60	built-in (8+4h) separate	100	1900
TH3-60-NB NS-WL-P-C	6,0	5	8	*230	385	1395	70	60	built-in (8+4h) separate	100	1900
TH4-60-NB NS-WL-P-C	6,0	5	9	*250	475	1395	105	90	built-in (8+4h) separate	100	1900
TH5-80-NB NS-WL-P-C	8,0	7	13	*250	475	1395	105	90	built-in (8+4h) separate	100	1900
TH5-90NS-WL-P-C	9,0	8	14	*250	475	1395	105	90	separate	100	1900
TH6-80 NB NS-WL-P-C	8,0	7	14	*300	540	1395	160	100	built-in (8+4h) separate	100	1900
TH6-90 NB NS-WL-P-C	9,0	8	15	*300	540	1395	160	100	built-in (8+4h) separate	100	1900
TH6-105NS-WL-P	10,5	9	16	*300	540	1395	160	100	separate	100	2100
TH6-120NS-WL-P	12,0	11	18	*300	540	1395	160	100	separate	100	2100
TH9-105NS-WL-P	10,5	10	16	*355	650	1395	230	165	separate	100	2100
TH9-120NS-WL-P	12,0	11	20	*355	650	1395	230	165	separate	100	2100
TH9-150NS-WL-P	15,0	14	25	*355	650	1395	230	165	separate	100	2100
TH9-180NS-WL-P	18,0	18	28	*355	650	1395	230	165	separate	100	2300
TH12-150NS-WL-P	15,0	15	26	*425	790	1395	360	220	separate	100	2300
TH12-180NS-WL-P	18,0	18	30	*425	790	1395	360	220	separate	100	2300
TH12-210NS-WL-P	21,0	22	35	*425	790	1395	360	220	separate	100	2300
TH12-240NS-WL-P	24,0	24	40	*425	790	1395	360	220	separate	100	2300

*Depth when installed to the wall.

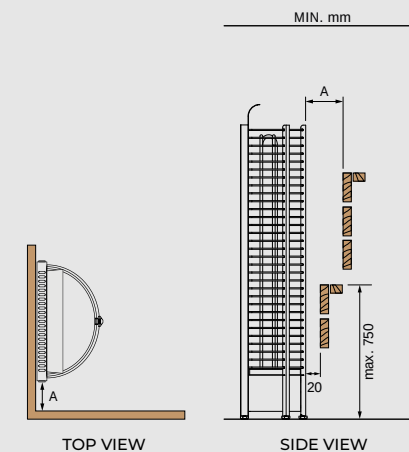

Minimum Safety Distances

Heater Accessories (Optional)

Integration Collars for Wall



Stainless steel



Wooden
Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST2-WL	355	650	45
TH-COLLAR-ST4-WL	380	700	45
TH-COLLAR-ST6-WL	445	830	45
TH-COLLAR-ST9-WL	470	880	45
TH-COLLAR-ST12-WL	535	1010	45

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W2-WL-D A	345	630	45
TH-COLLAR-W4-WL-D A	385	715	45
TH-COLLAR-W6-WL-D A	425	790	45
TH-COLLAR-W9-WL-D A	480	890	45
TH-COLLAR-W12-WL-D A	545	1030	45

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S2-WL	345	635	45
TH-COLLAR-S4-WL	390	720	45
TH-COLLAR-S6-WL	425	795	45
TH-COLLAR-S9-WL	475	895	45
TH-COLLAR-S12-WL	545	1035	45


Heater Guards for Wall



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)		
	LENGTH	WIDTH	HEIGHT
TH-GUARD-W2-WL-D A	355	645	90
TH-GUARD-W4-WL-D A	725	395	90
TH-GUARD-W6-WL-D A	435	800	90
TH-GUARD-W9-WL-D A	485	900	90
TH-GUARD-W12-WL-D A	555	1040	90

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)		
	LENGTH	WIDTH	HEIGHT
TH2 TH3			
TH4 TH5			
TH6			
TH9			
TH12			

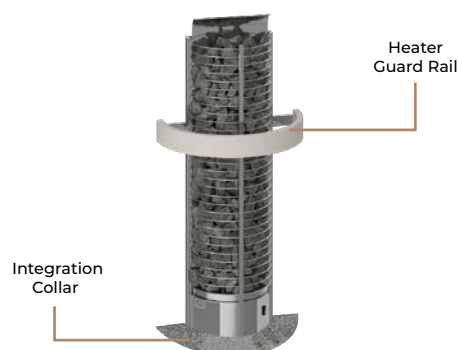

Tower Corner

Tower Corner is specifically designed to fit into tight corners. It makes the most out of the sauna layout without sacrificing heat and style.

The Tower Corner will ensure a gentle, soothing warmth for a truly relaxing experience.



Technical DATA

Saunova (Ni2) and Innova (Ni)

HEATER MODEL	kW	SAUNA ROOM MIN MAX (m²)		SIZE OF HEATER LENGTH WIDTH HEIGHT (mm)			STONES Without Stone Spacer With Stone Spacer (kg)		CONTROL	MINIMUM SAFETY DISTANCES A B	
TH2-30Ni2-CNR-P-C	3,0	2	4	300	*300	1380	70	45	Saunova	100	1900
TH3-35Ni2-CNR-P-C	3,5	3	6	300	*300	1380	70	45	Saunova	100	1900
TH3-45Ni2-CNR-P-C	4,5	3	6	300	*300	1380	70	45	Saunova	100	1900
TH3-60Ni2-CNR-P-C	6,0	5	8	300	*300	1380	70	45	Saunova	100	1900
TH4-60Ni2-CNR-P-C	6,0	5	9	355	*355	1380	105	70	Saunova	100	1900
TH5-80Ni2-CNR-P-C	8,0	7	13	355	*355	1380	105	70	Saunova	100	1900
TH5-90Ni2-CNR-P-C	9,0	8	14	355	*355	1380	105	70	Saunova	100	1900
TH6-80Ni2-CNR-P	8,0	7	14	415	*415	1380	160	80	Saunova	100	1900
TH6-90Ni2-CNR-P	9,0	8	15	415	*415	1380	160	80	Saunova	100	1900
TH6-105Ni2-CNR-P	10,5	9	16	415	*415	1380	160	100	Innova	100	1900
TH6-120Ni2-CNR-P	12,0	11	18	415	*415	1380	160	100	Innova	100	2100


Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM MIN MAX (m²)		SIZE OF HEATER LENGTH WIDTH HEIGHT (mm)			STONES Without Stone Spacer With Stone Spacer (kg)		CONTROL	MINIMUM SAFETY DISTANCES A B	
TH2-30NB-CNR-P-C	3,0	2	4	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH3-35NB-CNR-P-C	3,5	3	6	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH3-45NB-CNR-P-C	4,5	3	6	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH3-60NB-CNR-P-C	6,0	5	8	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH4-60NB-CNR-P-C	6,0	5	9	355	*355	1380	105	70	built-in (8+4h)	125	1900
TH5-80NB-CNR-P-C	8,0	7	13	355	*355	1380	105	70	built-in (8+4h)	125	1900
TH6-80NB-CNR-P-C	8,0	7	14	415	*415	1380	160	80	built-in (8+4h)	125	1900
TH6-90NB-CNR-P-C	9,0	8	15	415	*415	1380	160	80	built-in (8+4h)	125	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM MIN MAX (m²)		SIZE OF HEATER LENGTH WIDTH HEIGHT (mm)			STONES Without Stone Spacer With Stone Spacer (kg)		CONTROL	MINIMUM SAFETY DISTANCES A B	
TH3-35NS-CNR-P-C	3,5	3	6	300	*300	1380	70	45	separate	100	1900
TH3-45NS-CNR-P-C	4,5	3	6	300	*300	1380	70	45	separate	100	1900
TH3-60NS-CNR-P-C	6,0	5	8	300	*300	1380	70	45	separate	100	1900
TH4-60NS-CNR-P-C	6,0	5	9	355	*355	1380	105	70	separate	100	1900
TH5-80NS-CNR-P-C	8,0	7	13	355	*355	1380	105	70	separate	100	1900
TH5-90NS-CNR-P-C	9,0	8	14	355	*355	1380	105	70	separate	100	1900
TH6-80NS-CNR-P-C	8,0	7	14	415	*415	1380	160	80	separate	100	1900
TH6-90NS-CNR-P-C	9,0	8	15	415	*415	1380	160	80	separate	100	1900
TH6-105NS-CNR-P	10,5	9	16	415	*415	1380	160	80	separate	100	1900
TH6-120NS-CNR-P	12,0	11	18	415	*415	1380	160	80	separate	100	2100

*Depth when installed to the wall.

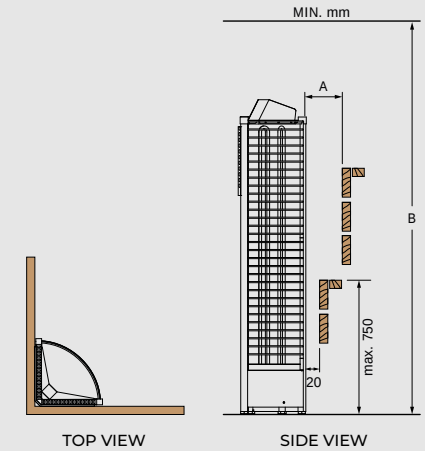

Minimum Safety Distances



Heater Accessories (Optional)

Integration Collars for Corner



Stainless steel



Wooden
Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-ST2-CNR	220	670	45
TH-COLLAR-ST4-CNR	235	730	45
TH-COLLAR-ST6-CNR	245	795	45

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-W2-CNR-D A	200	600	45
TH-COLLAR-W4-CNR-D A	215	670	45
TH-COLLAR-W6-CNR-D A	235	755	45

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-S2-CNR	425	425	45
TH-COLLAR-S4-CNR	475	475	45
TH-COLLAR-S6-CNR	535	535	45


Heater Guards for Corner



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-GUARD-W2-CNR-D A	240	595	90
TH-GUARD-W4-CNR-D A	255	670	90
TH-GUARD-W6-CNR-D A	270	755	90


MODEL	SIZE OF GUARD RAIL		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH2 TH3			
TH4 TH5			
TH6			

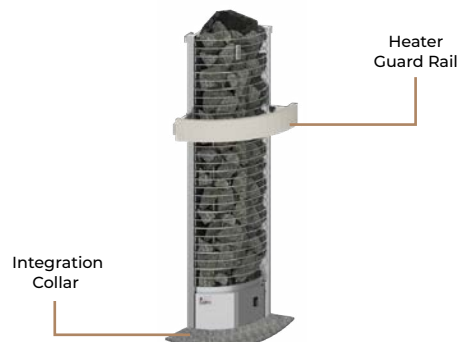


Aries Heaters

Aries heaters are designed with a straightforward structure, yet modern needs in mind. The collection packs a stronger punch heat-wise due to its towering design.

The Aries heaters come in Round, Wall, and Corner models.



Round

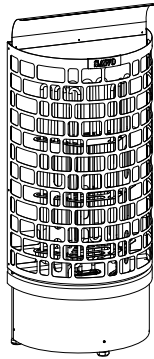

Wall



Corner





Aries ROUND

- » Power range: 4,5 – 18,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Built-in stone spacer
- » Casing: Stainless steel or black steel
- » Adjustable legs
- » Optional heater guard and integration collar



Aries WALL

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Built-in stone spacer
- » Casing: Stainless steel or black steel
- » Adjustable legs
- » Optional heater guard and integration collar



Aries CORNER

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Built-in stone spacer
- » Casing: Stainless steel or black steel
- » Adjustable legs
- » Optional heater guard and integration collar



Aries Round

Aries Round is a stylish eye-catcher that delivers consistent heat from top to bottom. It can be placed perfectly in the middle of the sauna or embedded into the benches.



Technical DATA

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45Ni2-P-C ARI3-45Ni2-BL-P-C	4,5	3	6	300	300	930	60	Saunova	100	1900
ARI3-60Ni2-P-C ARI3-60Ni2-BL-P-C	6,0	5	9	300	300	930	60	Saunova	100	1900
ARI3-75Ni2-P-C ARI3-75Ni2-BL-P-C	7,5	7	12	300	300	930	60	Saunova	100	1900
ARI3-90Ni2-P-C ARI3-90Ni2-BL-P-C	9,0	8	13	300	300	930	60	Saunova	100	1900

Aries Round (Ni2)

Aries Round Black (Ni2)

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NS-P-C ARI3-45NS-BL-P-C	4,5	3	6	300	300	930	60	separate	100	1900
ARI3-60NS-P-C ARI3-60NS-BL-P-C	6,0	5	9	300	300	930	60	separate	100	1900
ARI3-75NS-P-C ARI3-75NS-BL-P-C	7,5	7	12	300	300	930	60	separate	100	1900
ARI3-90NS-P-C ARI3-90NS-BL-P-C	9,0	8	14	300	300	930	60	separate	100	1900
ARI6-90NS-P-C ARI6-90NS-BL-P-C	9,0	8	14	440	440	930	110	separate	100	1900
ARI6-105NS-P ARI6-105NS-BL-P	10,5	9	15	440	440	930	110	separate	100	1900
ARI6-120NS-P ARI6-120NS-BL-P	12,0	10	18	440	440	930	110	separate	100	2100
ARI6-150NS-P ARI6-150NS-BL-P	15,0	13	23	440	440	930	110	separate	100	2100
ARI6-180NS-P ARI6-180NS-BL-P	18,0	15	26	440	440	930	110	separate	125	2100

Aries Round (NS)


Aries Round Black (NS)

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NB-P-C ARI3-45NB-BL-P-C	4,5	3	6	300	300	930	60	built-in (8+4h)	100	1900
ARI3-60NB-P-C ARI3-60NB-BL-P-C	6,0	5	9	300	300	930	60	built-in (8+4h)	100	1900
ARI3-75NB-P-C ARI3-75NB-BL-P-C	7,5	7	12	300	300	930	60	built-in (8+4h)	100	1900
ARI3-90NB-P-C ARI3-90NB-BL-P-C	9,0	8	14	300	300	930	60	built-in (8+4h)	100	1900
ARI6-90NB-P-C ARI6-90NB-BL-P-C	9,0	8	14	440	440	930	110	built-in (8+4h)	100	1900


Aries Round (NB)

Aries Round Black (NB)

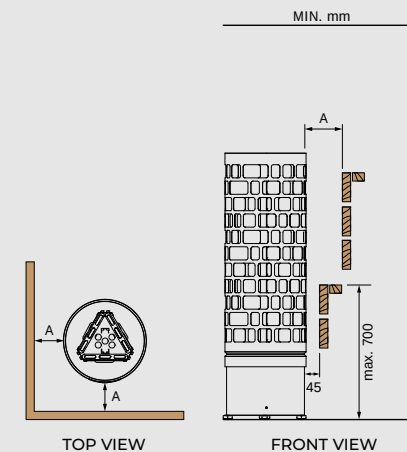

Minimum Safety Distances

Heater Accessories (Optional)

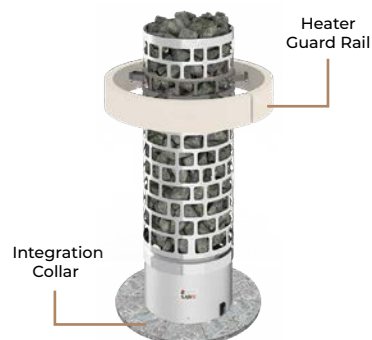

Stainless (for ARI3)

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-V2-ST4	420	420	105



Stainless

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-ST4	540	540	45
TH-COLLAR-ST6	640	640	45



Wooden Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-W4-D A	485	485	45
TH-COLLAR-W6-D A	540	540	45



Soapstone

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-S4	560	560	45
TH-COLLAR-S6	620	620	45



Wooden Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	WIDTH (mm)	DEPTH (mm)	HEIGHT (mm)
ARI-GUARD-W3-D A	570	570	110
ARI-GUARD-W6-D A	700	700	110

MODEL	SIZE OF GUARD RAIL		
	WIDTH (mm)	DEPTH (mm)	HEIGHT (mm)
ARI3			
ARI6			

Aries Wall

Aries Wall is a space-saving wonder that combines practicality and elegance with its sleek design. It is perfect for wall-installation, freeing up valuable space in the sauna.





Aries Wall
(Ni2)

Aries Wall Black
(Ni2)



Aries Wall
(NS)

Aries Wall Black
(NS)



Aries Wall
(NB)

Aries Wall Black
(NB)

Saunova (Ni2)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45Ni2-WL-P-C ARI3-45Ni2-WL-BL-P-C	4,5	3	6	*250	415	1030	65	Saunova	100	1900
ARI3-60Ni2-WL-P-C ARI3-60Ni2-WL-BL-P-C	6,0	5	9	*250	415	1030	65	Saunova	100	1900
ARI3-75Ni2-WL-P-C ARI3-75Ni2-WL-BL-P-C	7,5	7	13	*250	415	1030	65	Saunova	100	1900
ARI3-90Ni2-WL-P-C ARI3-90Ni2-WL-BL-P-C	9,0	8	14	*250	415	1030	65	Saunova	100	1900


Saunova/Innova (NS)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NS-WL-P-C ARI3-45NS-WL-BL-P-C	4,5	3	6	*250	415	1030	65	separate	100	1900
ARI3-60NS-WL-P-C ARI3-60NS-WL-BL-P-C	6,0	5	9	*250	415	1030	65	separate	100	1900
ARI3-75NS-WL-P-C ARI3-75NS-WL-BL-P-C	7,5	7	13	*250	415	1030	65	separate	100	1900
ARI3-90NS-WL-P-C ARI3-90NS-WL-BL-P-C	9,0	8	14	*250	415	1030	65	separate	100	1900


Built-in (NB)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NB-WL-P-C ARI3-45NB-WL-BL-P-C	4,5	3	6	*250	415	1030	65	built-in (8+4h)	100	1900
ARI3-60NB-WL-P-C ARI3-60NB-WL-BL-P-C	6,0	5	9	*250	415	1030	65	built-in (8+4h)	100	1900
ARI3-75NB-WL-P-C ARI3-75NB-WL-BL-P-C	7,5	7	13	*250	415	1030	65	built-in (8+4h)	100	1900
ARI3-90NB-WL-P-C ARI3-90NB-WL-BL-P-C	9,0	8	14	*250	415	1030	65	built-in (8+4h)	100	1900

*Depth when installed to the wall.

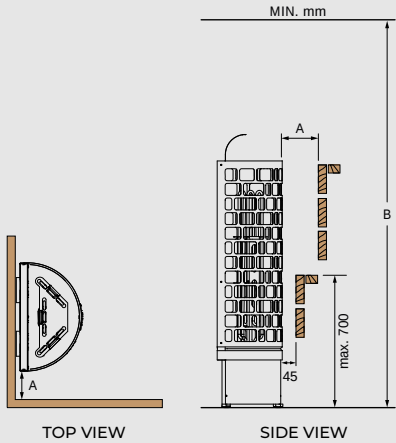

Minimum Safety Distances

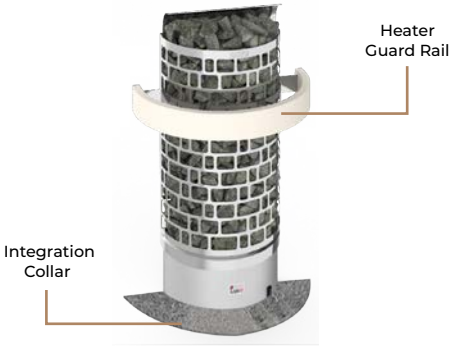

Heater Accessories (Optional)

Integration Collars for Wall



Stainless



Wooden
Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST4-WL	380	700	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W4-WL-D A	385	715	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S4-WL	390	720	45

Heater Guards for Wall



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
ARI-GUARD-W3-WL-D A	665	380	110
ARI3			

Aries Corner

Aries Corner makes the most of the sauna layout without settling for anything less than exceptional. The Corner model is designed to fit snugly into tight corners, rendering it perfect for saunas with limited space.





Aries Corner
(Ni2)



Aries Corner Black
(Ni2)



Aries Corner
(NS)



Aries Corner Black
(NS)



Aries Corner
(NB)



Aries Corner Black
(NB)

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45Ni2-CNR-P-C ARI3-45Ni2-CNR-BL-P-C	4,5	3	6	335	*335	1000	65	Saunova	100	1900
ARI3-60Ni2-CNR-P-C ARI3-60Ni2-CNR-BL-P-C	6,0	5	9	335	*335	1000	65	Saunova	100	1900
ARI3-75Ni2-CNR-P-C ARI3-75Ni2-CNR-BL-P-C	7,5	7	13	335	*335	1000	65	Saunova	100	1900
ARI3-90Ni2-CNR-P-C ARI3-90Ni2-CNR-BL-P-C	9,0	8	14	335	*335	1000	65	Saunova	100	1900


Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NS-CNR-P-C ARI3-45NS-CNR-BL-P-C	4,5	3	6	335	*335	1000	65	separate	100	1900
ARI3-60NS-CNR-P-C ARI3-60NS-CNR-BL-P-C	6,0	5	9	335	*335	1000	65	separate	100	1900
ARI3-75NS-CNR-P-C ARI3-75NS-CNR-BL-P-C	7,5	7	13	335	*335	1000	65	separate	100	1900
ARI3-90NS-CNR-P-C ARI3-90NS-CNR-BL-P-C	9,0	8	14	335	*335	1000	65	separate	100	1900

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NB-CNR-P-C ARI3-45NB-CNR-BL-P-C	4,5	3	6	335	*335	1000	65	built-in (8+4h)	100	1900
ARI3-60NB-CNR-P-C ARI3-60NB-CNR-BL-P-C	6,0	5	9	335	*335	1000	65	built-in (8+4h)	100	1900
ARI3-75NB-CNR-P-C ARI3-75NB-CNR-BL-P-C	7,5	7	19	335	*335	1000	65	built-in (8+4h)	100	1900
ARI3-90NB-CNR-P-C ARI3-90NB-CNR-BL-P-C	9,0	8	14	335	*335	1000	65	built-in (8+4h)	100	1900

*Depth when installed to the wall.

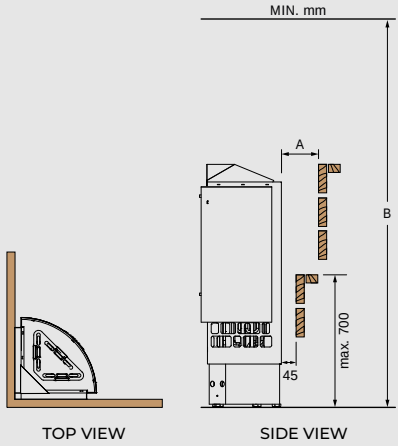

Minimum Safety Distances

Heater Accessories (Optional)

Integration Collars for Corner



Stainless



Wooden
Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST4-CNR	235	730	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W4-CNR-D A	215	670	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S4-CNR	475	475	45

Corner Heater Guards



Wooden
Cedar (D) and Aspen (A)


MODEL	SIZE OF GUARD RAIL			MODEL
	LENGTH	WIDTH	HEIGHT	
ARI-GUARD-W3-CNR-D A	215	635	110	ARI3



Cubos

Cubos is the ultimate 3-in-1 heater – it can be placed either in the middle, corner or wall of the sauna room. The additional protective cover* allows for wall and/or corner installation. This modern and versatile heater is truly one of a kind.

*sold separately

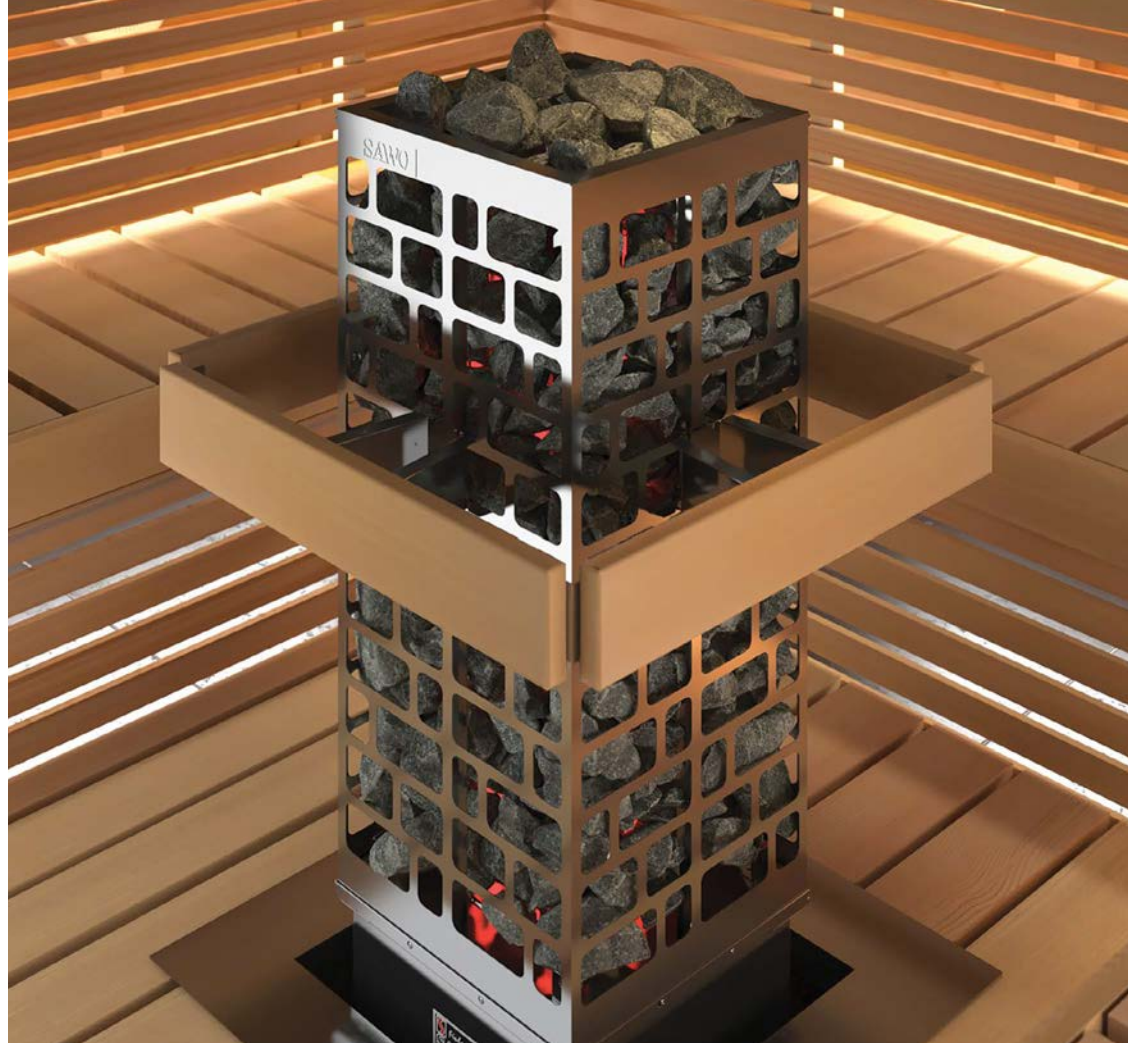

Saunova 2.0 Operated
(Ni2)





Separate
(NS)



Built-in Control
(NB)

Middle
Installation



Wall Installation
with Protective Cover



Corner Installation
with Protective Cover




Cubos

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Casing: Stainless steel
- » Built-in stone spacer
- » Adjustable legs
- » Optional heater guard and integration collar

Protective Cover Accessory


Wall Installation

The protective cover allows the heater to be installed against the wall, if the sauna is limited in space. The protective cover set for wall installation includes a covering sheet and a reflector that directs heat even to the lowest parts of the sauna room, ensuring that it heats up entirely.



Wall Installation
with Protective Cover

MODEL	SIZE OF COVER		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-PROCOV-WL	25	285	645

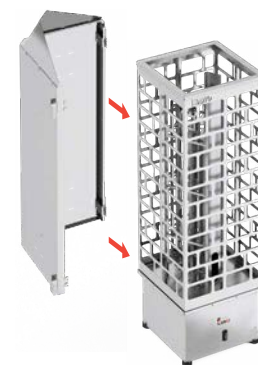


Corner Installation
with Protective Cover

Corner Installation

Cubos quickly changes to corner model with a protective cover for corner. Corner installation saves space and allows for different bench designs. The protective cover for corner set includes two pieces of covering sheet and a reflector.

MODEL	SIZE OF COVER		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-PROCOV-CNR	285	285	645

Technical DATA

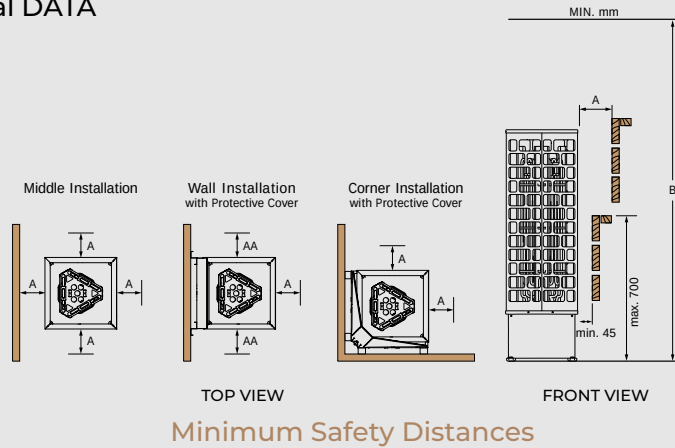

Heater Accessories (Optional)

Integration Collars for Cubos

Wooden Collar for CUB3 Middle Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-W3-D	540 540 45
CUB-COLLAR-W3-A	540 540 45

Wooden Collar for CUB3 Wall Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-W3-WL-D	465 465 45
CUB-COLLAR-W3-WL-A	465 465 45

Wooden Collar for CUB3 Corner Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-W3-CNR-D	540 540 45
CUB-COLLAR-W3-CNR-A	540 540 45

Stainless Steel Collar for CUB3 Middle Installation

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-ST3	525 525 45

Stainless Steel Collar for CUB3 Wall Installation

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-ST3-WL	460 525 45

Stainless Steel Collar for CUB3 Corner Installation

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-ST3-CNR	460 460 45

Soapstone Collar for CUB3 Middle Installation

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-S3	535 535 45

Soapstone Collar for CUB3 Wall Installation

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-S3-WL	465 535 45

Soapstone Collar for CUB3 Corner Installation

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-S3-CNR	465 465 45

Heater Guards for Cubos

Wooden Heater Guard for CUB3 Middle Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-GUARD-W3-D	530 530 90
CUB-GUARD-W3-A	530 530 90

Wooden Heater Guard for CUB3 Wall Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-GUARD-W3-WL-D	460 530 90
CUB-GUARD-W3-WL-A	460 530 90

Wooden Heater Guard for CUB3 Corner Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-GUARD-W3-CNR-D	460 460 90
CUB-GUARD-W3-CNR-A	460 460 90

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER (w/ WALL INSTALLATION) (mm)								STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN (m²)	MAX	MIDDLE		WALL		CORNER		HEIGHT	A			AA	B	
				LENGTH	WIDTH	LENGTH	WIDTH	LENGTH	WIDTH							
CUB3-45NI2-P-C	4,5	3	6	290	290	290	340	340	340	930	75	Saunova	100	100	1900	
CUB3-60NI2-P-C	6,0	5	9	290	290	290	340	340	340	930	75	Saunova	100	100	1900	
CUB3-75NI2-P-C	7,5	7	13	290	290	290	340	340	340	930	75	Saunova	100	135	1900	
CUB3-90NI2-P-C	9,0	8	14	290	290	290	340	340	340	930	75	Saunova	125	135	1900	

Saunova/Innova (NS)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER (w/ WALL INSTALLATION) (mm)							STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	MIDDLE		WALL		CORNER		HEIGHT			A	AA	B
				LENGTH	WIDTH	LENGTH	WIDTH	LENGTH	WIDTH						
CUB3-45NS-P-C	4,5	3	6	290	290	290	340	340	340	930	75	separate	100	100	1900
CUB3-60NS-P-C	6,0	5	9	290	290	290	340	340	340	930	75	separate	100	100	1900
CUB3-75NS-P-C	7,5	7	13	290	290	290	340	340	340	930	75	separate	100	135	1900
CUB3-90NS-P-C	9,0	8	14	290	290	290	340	340	340	930	75	separate	125	135	1900

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER (w/ WALL INSTALLATION) (mm)								STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	MIDDLE		WALL		CORNER		HEIGHT	A			AA	B	
				LENGTH	WIDTH	LENGTH	WIDTH	LENGTH	WIDTH							
CUB3-45NB-P-C	4,5	3	6	290	290	290	340	340	340	930	75	built-in (8+4h)	100	100	1900	
CUB3-60NB-P-C	6,0	5	9	290	290	290	340	340	340	930	75	built-in (8+4h)	100	100	1900	
CUB3-75NB-P-C	7,5	7	13	290	290	290	340	340	340	930	75	built-in (8+4h)	100	135	1900	
CUB3-90NB-P-C	9,0	8	14	290	290	290	340	340	340	930	75	built-in (8+4h)	125	135	1900	

Phoenix

Rising from the ashes, our **Phoenix** heater makes the user feel reborn and refreshed.

The broadening shape, inspired by the Olympic torch, allows more stones to be placed in the top, ensuring the creation of a greater amount of pampering steam.

- » Power range: 4,5 – 18,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS)
- » Stainless steel tubes hold the stones
- » Stone spacer inside to prolong heating elements lifespan
- » Floor standing
- » Can fit from 85kg to 130kg of stones
- » Adjustable legs
- » Optional heater guard and integration collar





Phoenix
(Ni2)




Phoenix
(NS)

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
PNX3-45Ni2-P-C	4,5	3	6	340	375	1100	85	Saunova	100	1900
PNX3-60Ni2-P-C	6,0	5	9	340	375	1100	85	Saunova	125	1900
PNX3-75Ni2-P-C	7,5	7	13	340	375	1100	85	Saunova	125	1900
PNX3-90Ni2-P-C	9,0	8	14	340	375	1100	85	Saunova	150	1900
PNX6-90Ni2-P-C	9,0	8	15	475	525	1175	130	Saunova	150	1900


Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
PNX3-45NS-P-C	4,5	3	6	340	375	1100	85	separate	100	1900
PNX3-60NS-P-C	6,0	5	9	340	375	1100	85	separate	125	1900
PNX3-75NS-P-C	7,5	7	12	340	375	1100	85	separate	125	1900
PNX3-90NS-P-C	9,0	8	14	340	375	1100	85	separate	150	1900
PNX6-90NS-P-C	9,0	8	15	475	525	1175	130	separate	150	1900
PNX6-105NS-P	10,5	9	16	475	525	1175	130	separate	150	1900
PNX6-120NS-P	12,0	11	18	475	525	1175	130	separate	150	2100
PNX6-150NS-P	15,0	14	25	475	525	1175	130	separate	150	2100
PNX6-180NS-P	18,0	18	28	475	525	1175	130	separate	175	2100

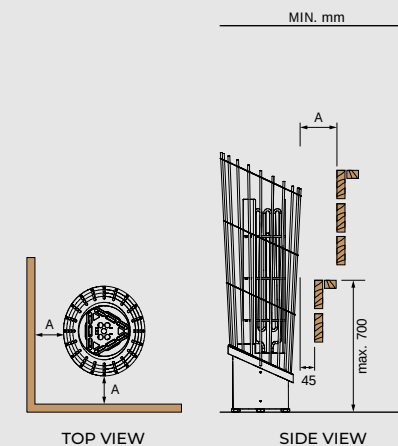

Minimum Safety Distances

Heater Accessories (Optional)

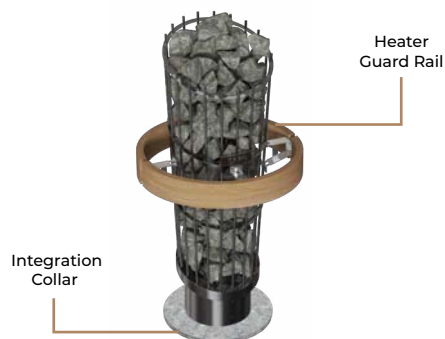

Integration Collars for Phoenix



Stainless steel



Stainless steel



Wooden
Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
	(mm)	(mm)	(mm)
TH-COLLAR-V2-ST4	420	420	105

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
	(mm)	(mm)	(mm)
TH-COLLAR-ST4	540	540	45
TH-COLLAR-ST9	640	640	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
	(mm)	(mm)	(mm)
TH-COLLAR-W4-D A	200	495	150
TH-COLLAR-W9-D A	233	608	150

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
	(mm)	(mm)	(mm)
TH-COLLAR-S4	560	560	45
TH-COLLAR-S9	690	690	45

Heater Guards for Phoenix



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
	(mm)	(mm)	(mm)
PNX-GUARD-W3-A D	560	560	90

MODEL
PNX3
PNX6

Heaterking

Heaterking heaters by Stefan Lindfors emanate king-size heat and feature a bold design cover.

Its unique, stainless steel Junglefire pattern decorates the cover with style.

The Heaterking comes in Round, Wall, and Corner models.



Heaterking ROUND



(NS)

- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Casing: Stainless steel with intricate Junglefire pattern
- » Stone spacer inside to prolong heating elements lifespan
- » Can fit from 60kg to 360kg of stones
- » Adjustable legs
- » Optional heater guard

Heaterking WALL



(NS)

- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Casing: Stainless steel with intricate Junglefire pattern
- » Stone spacer inside to prolong heating elements lifespan
- » Can fit from 60kg to 250kg of stones
- » Wall type stainless steel casing
- » Adjustable legs
- » Heat reflector included

Heaterking CORNER




(NS)

- » Power range: 3,5 – 12,0kW
- » Available controls: Saunova/Innova (NS)
- » Casing: Stainless steel with intricate Junglefire pattern
- » Stone spacer inside to prolong heating elements lifespan
- » Can fit from 45kg to 160kg of stones
- » Corner-type stainless steel casing
- » Adjustable legs
- » Heat reflector included

Technical DATA



Heaterking ROUND

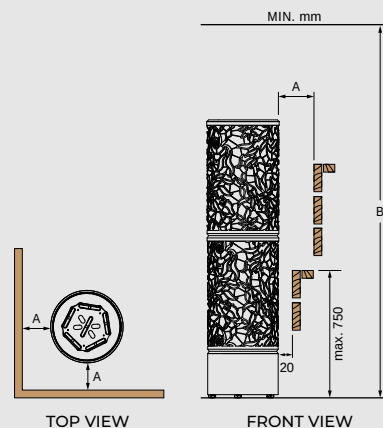

Minimum Safety Distances

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
DRFT2-30NS-P	3,0	2	4	250	250	1325	70	60	separate	150	1900
DRFT3-35NS-P-C	3,5	3	6	250	250	1325	70	60	separate	100	1900
DRFT3-45NS-P-C	4,5	3	6	250	250	1325	70	60	separate	100	1900
DRFT3-60NS-P-C	6,0	5	8	250	250	1325	70	60	separate	150	1900
DRFT4-60NS-P-C	6,0	5	9	295	295	1325	105	90	separate	100	1900
DRFT5-80NS-P-C	8,0	8	14	295	295	1325	105	90	separate	200	1900
DRFT5-90NS-P-C	9,0	8	14	295	295	1325	105	90	separate	200	1900
DRFT6-80NS-P-C	8,0	7	14	355	355	1325	160	100	separate	100	1900
DRFT6-90NS-P-C	9,0	8	15	355	355	1325	160	100	separate	100	1900
DRFT6-105NS-P	10,5	9	16	355	355	1325	160	100	separate	150	1900
DRFT6-120NS-P	12,0	11	18	355	355	1325	160	100	separate	200	2100
DRFT9-105NS-P	10,5	10	16	425	425	1325	230	165	separate	150	2100
DRFT9-120NS-P	12,0	11	20	425	425	1325	230	165	separate	150	2100
DRFT9-150NS-P	15,0	14	25	425	425	1325	230	165	separate	200	2100
DRFT9-180NS-P	18,0	18	28	425	425	1325	230	165	separate	200	2100
DRFT12-150NS-P	15,0	15	26	525	525	1325	360	220	separate	200	2300
DRFT12-180NS-P	18,0	18	30	525	525	1325	360	220	separate	200	2300
DRFT12-210NS-P	21,0	22	35	525	525	1325	360	220	separate	200	2300
DRFT12-240NS-P	24,0	24	40	525	525	1325	360	220	separate	200	2300



Heater Accessories (Optional)

Heaterking Round Heater Guards



Wooden Heater Guard for
DRFT 2 and 3 H.E Round
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-W2-D	510	510	105
DRFT-W2-A	510	510	105



Wooden Heater Guard for
DRFT 4 and 5 H.E Round
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-W4-D	560	560	105
DRFT-W4-A	560	560	105



Wooden Heater Guard for
DRFT 6 H.E Round
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-W6-D	620	620	105
DRFT-W6-A	620	620	105



Wooden Heater Guard for
DRFT 9 H.E Round
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-W9-D	690	690	105
DRFT-W9-A	690	690	105




Wooden Heater Guard for
DRFT 12 H.E Round
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-W12-D	790	790	105
DRFT-W12-A	790	790	105

Technical DATA




Heaterking WALL

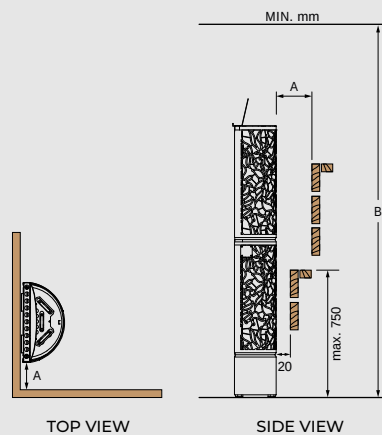

Minimum Safety Distances



Heaterking CORNER

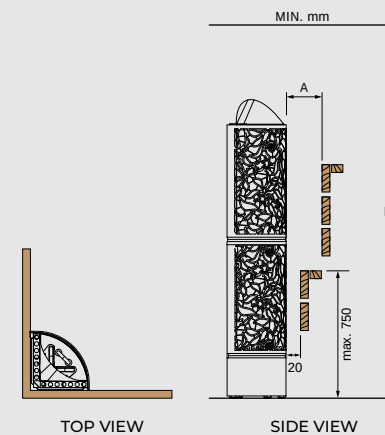

Minimum Safety Distances

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
DRFT3-35NS-WL-P-C	3,5	3	6	*220	395	1440	80	60	separate	100	1900
DRFT3-45NS-WL-P-C	4,5	3	6	*220	395	1440	80	60	separate	100	1900
DRFT3-60NS-WL-P-C	6,0	5	8	*220	395	1440	80	60	separate	100	1900
DRFT6-80NS-WL-P-C	8,0	7	14	*300	550	1475	160	105	separate	100	1900
DRFT6-90NS-WL-P-C	9,0	8	15	*300	550	1475	160	105	separate	100	1900
DRFT6-105NS-WL-P	10,5	9	16	*300	550	1475	160	105	separate	100	1900
DRFT6-120NS-WL-P	12,0	11	18	*300	550	1475	160	105	separate	100	2100
DRFT9-105NS-WL-P	10,5	10	16	*350	650	1510	180	115	separate	100	2100
DRFT9-120NS-WL-P	12,0	11	20	*350	650	1510	180	115	separate	100	2100
DRFT9-150NS-WL-P	15,0	14	25	*350	650	1510	180	115	separate	100	2100
DRFT9-180NS-WL-P	18,0	18	28	*350	650	1510	180	115	separate	100	2100
DRFT12-150NS-WL-P	15,0	15	26	*420	790	1545	250	165	separate	100	2300
DRFT12-180NS-WL-P	18,0	18	30	*420	790	1545	250	165	separate	100	2300
DRFT12-210NS-WL-P	21,0	22	35	*420	790	1545	250	165	separate	100	2300
DRFT12-240NS-WL-P	24,0	24	40	*420	790	1545	250	165	separate	100	2300

*Depth when installed to the wall.

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
DRFT3-35NS-CNR-P-C	3,5	3	6	*300	300	1410	70	45	separate	100	1900
DRFT3-45NS-CNR-P-C	4,5	3	6	*300	300	1410	70	45	separate	100	1900
DRFT3-60NS-CNR-P-C	6,0	5	8	*300	300	1410	70	45	separate	100	1900
DRFT6-80NS-CNR-P-C	8,0	7	14	*410	410	1430	160	100	separate	100	1900
DRFT6-90NS-CNR-P-C	9,0	8	15	*410	410	1430	160	100	separate	100	1900
DRFT6-105NS-CNR-P	10,5	9	16	*410	410	1430	160	100	separate	100	1900
DRFT6-120NS-CNR-P	12,0	11	18	*410	410	1430	160	100	separate	100	2100

*Depth when installed to the wall.



(NS)

Fiberjungle


Fiberjungle by Stefan Lindfors features a unique design – coated with eye-catching black fiber. While bold and gorgeous, the heater also has a cool-to-touch coating for increased safety around the heater.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs

Technical DATA



Fiberjungle

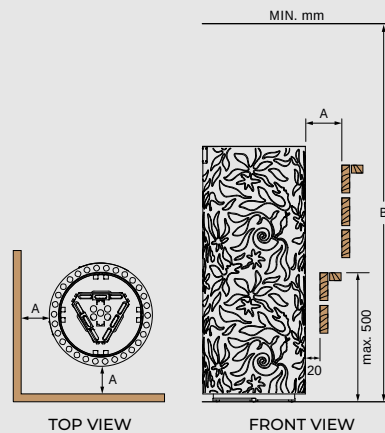

Minimum Safety Distances

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
DRF3-45NS-P-C	4,5	3	6	300	300	930	60	separate	100	1900
DRF3-60NS-P-C	6,0	5	9	300	300	930	60	separate	100	1900
DRF3-75NS-P-C	7,5	7	12	300	300	930	60	separate	100	1900
DRF3-90NS-P-C	9,0	8	13	300	300	930	60	separate	100	1900





Sauna HEATERS

FLOOR Series

Our Floor series features movable, sleek, and durable high-performance standalone heaters that ensure optimal heat distribution and comfort. Due to having more heater placement options, the heaters allow for a more customized look of the sauna room.


Nordex Pro

The newest addition to the trusted Nordex lineup, the **Nordex Pro** is engineered for long-lasting performance. Its separate stone compartment protects the heating elements and extends the unit's lifespan, while a pull-out cassette tray ensures effortless maintenance.


Although available in one physical size, the model can be paired with up to two additional units for a maximum of 27,0kW in larger sauna rooms.



Technical DATA



Nordex Pro

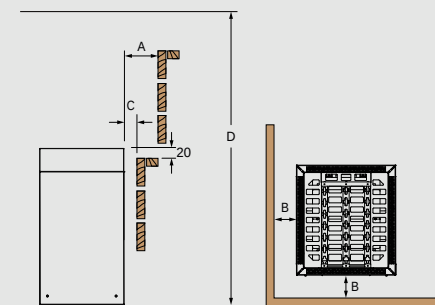


SIDE VIEW

TOP VIEW

Minimum Safety Distances



Nordex Pro
Connection Kit



The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements.



The Nordex Pro Connection Kit* is required in order to connect two or more Pros.

*sold separately

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRN-PRO-60NS-BL-Z-C	6,0	5	9	410	370	705	60	separate	50	50	5	1900
NRN-PRO-80NS-BL-Z-C	8,0	8	14	410	370	705	60	separate	80	80	5	1900
NRN-PRO-90NS-BL-Z-C	9,0	8	14	410	370	705	60	separate	80	80	5	1900



Nordex Pro
(NS)

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs


Nordex Pro Combi

Building on the Nordex tradition, the **Nordex Pro Combi** introduces an enhanced design that combines efficient heating with the added comfort of steam. An integrated water tank delivers gentle humidity, while the separated stone and element design enhances durability.


The Nordex Pro Combi's pull-out cassette tray simplifies maintenance, and the model can be paired with up to two additional units for a maximum of 27,0kW + 6,0kW in larger sauna rooms.



Technical DATA




Nordex Pro Combi

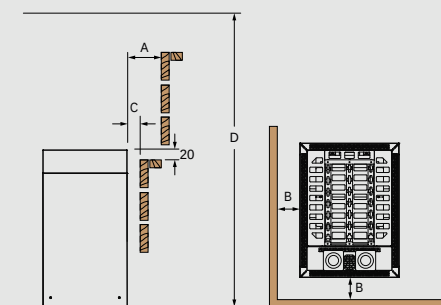

SIDE VIEW
TOP VIEW
Minimum Safety Distances



Nordex Pro
Connection Kit

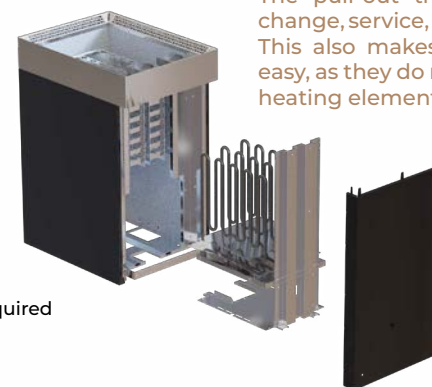

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements.

The Nordex Pro Connection Kit* is required in order to connect two or more Pros.

*sold separately

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRNC-PRO-60NS-BL-Z-C	6,0	1 x 0,8	5	9	500	370	705	60	separate	80	80	20	1900
NRNC-PRO-80NS-BL-Z-C	8,0	1 x 2,0	7	13	500	370	705	60	separate	80	80	20	1900
NRNC-PRO-90NS-BL-Z-C	9,0	1 x 2,0	8	14	500	370	705	60	separate	80	80	20	1900




Nordex Pro Combi
(NS)

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Built-in aroma cups
- » Adjustable legs
- » Separate water tank with 0,8kW steam generator


Nordex S

Nordex S is an updated version of Nordex Floor with slimmer design to allow for easier heater placement for different layouts.


Technical DATA



Nordex S

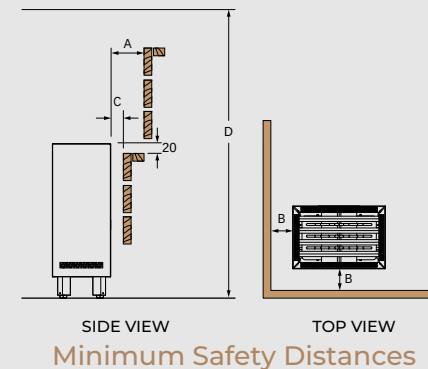

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs

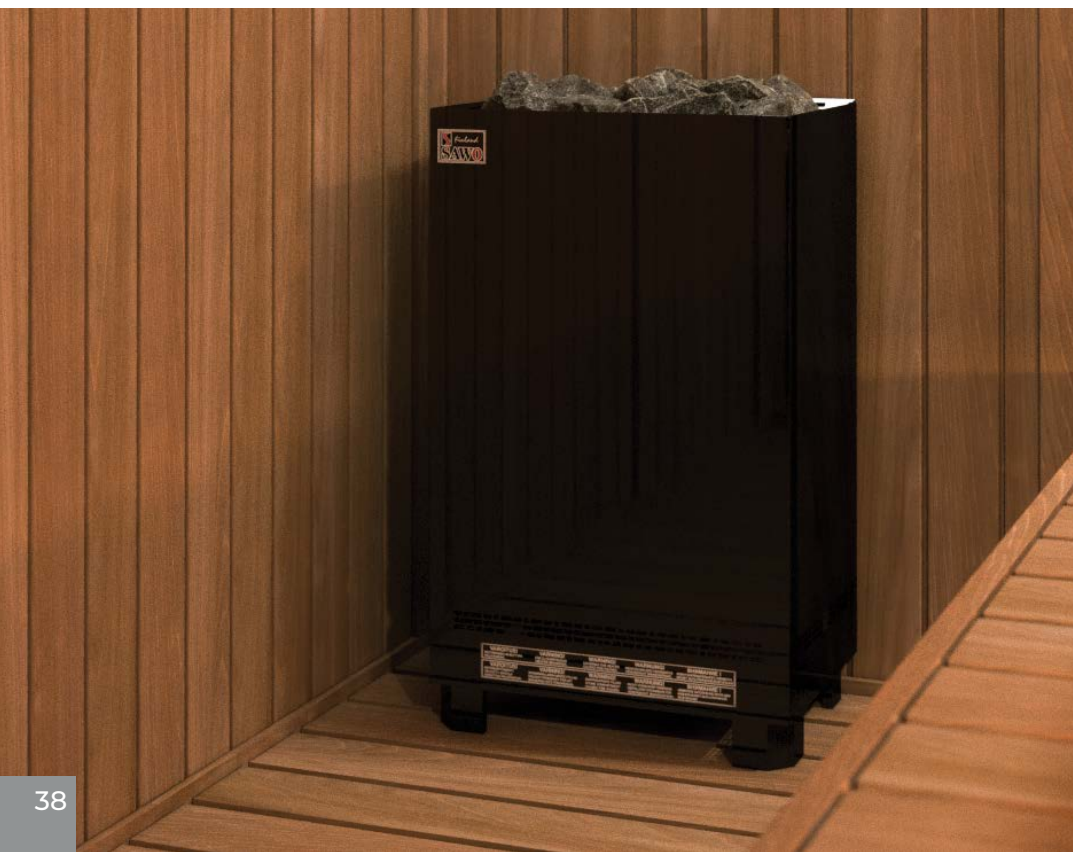

Saunova/Innova (NS)


HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRNS-60NS-Z-C	6,0	5	9	270	395	710	18 - 25	separate	50	50	5	1900
NRNS-60NS-BL-Z-C	6,0	5	9	270	395	710	18 - 25	separate	50	50	5	1900
NRNS-80NS-Z-C	8,0	7	13	270	395	710	18 - 25	separate	80	80	5	1900
NRNS-80NS-BL-Z-C	8,0	7	13	270	395	710	18 - 25	separate	80	80	5	1900
NRNS-90NS-Z-C	9,0	8	14	270	395	710	18 - 25	separate	80	80	5	1900
NRNS-90NS-BL-Z-C	9,0	8	14	270	395	710	18 - 25	separate	80	80	5	1900




Nordex S
(NS)



Nordex S Black
(NS)



Nordex S Combi

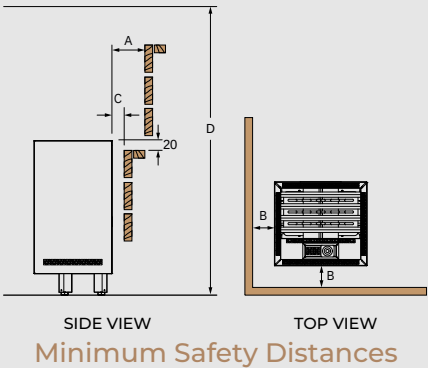

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW or 2,0kW steam generator
- » Built-in aroma cups
- » Adjustable legs

Saunova/Innova (NS)

HEATER MODEL	KW HEATER	KW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
NRNSC-60NS-Z-C	6,0	1 x 0,8	5	9	360	395	710	18 – 25	separate	5	50	5	1900
NRNSC-60NS-BL-Z-C	6,0	1 x 0,8	5	9	360	395	710	18 – 25	separate	5	50	5	1900
NRNSC-80NS-Z-C	8,0	1 x 2,0	7	13	360	395	710	18 – 25	separate	5	80	5	1900
NRNSC-80NS-BL-Z-C	8,0	1 x 2,0	7	13	360	395	710	18 – 25	separate	5	80	5	1900
NRNSC-90NS-Z-C	9,0	1 x 2,0	8	14	360	395	710	18 – 25	separate	5	80	5	1900
NRNSC-90NS-BL-Z-C	9,0	1 x 2,0	8	14	360	395	710	18 – 25	separate	5	80	5	1900



Nordex S Combi (NS)



Nordex S Combi Black (NS)

Nordex S Combi

The **Nordex S Combi** is now available in a steamier version. Balance the intense heat with an additional water tank for more steam. Also available with a black metal casing.




Nordex Floor


Nordex floor is a floor-mounted heater with straightforward design and quality performance. It is available with stainless steel or black metal casing.



Technical DATA



Nordex Floor

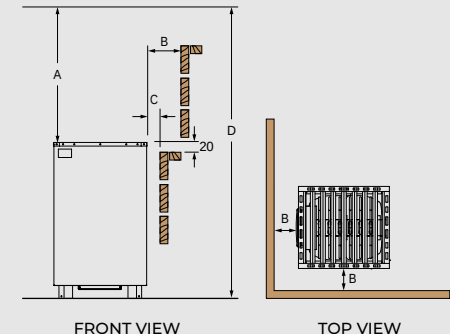

Minimum Safety Distances

- » Power range: 9,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs



Saunova/Innova (NS)


HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX (m²)	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRNF-90NS-Z NRNF-90NS-BL-Z	9,0	8	14	450	400	670	45	separate	1200	120	50	1900
NRNF-105NS-Z NRNF-105NS-BL-Z	10,5	9	15	450	400	670	45	separate	1200	120	60	1900
NRNF-120NS-Z NRNF-120NS-BL-Z	12,0	10	18	450	400	670	45	separate	1400	130	70	2100
NRNF-150NS-Z NRNF-150NS-BL-Z	15,0	13	23	595	400	670	55	separate	1400	160	100	2100
NRNF-180NS-Z NRNF-180NS-BL-Z	18,0	17	29	595	400	670	55	separate	1400	160	100	2100
NRNF-180NS-V12-Z NRNF-180NS-BL-V12-Z	18,0	18	30	740	400	670	75	separate	1400	160	100	2100
NRNF-210NS-V12-Z NRNF-210NS-BL-V12-Z	21,0	22	35	740	400	670	75	separate	1400	160	100	2100
NRNF-240NS-V12-Z NRNF-240NS-BL-V12-Z	24,0	26	42	740	400	670	75	separate	1400	160	100	2100




Nordex Floor (NS)



Nordex Floor Black (NS)



Krios Floor

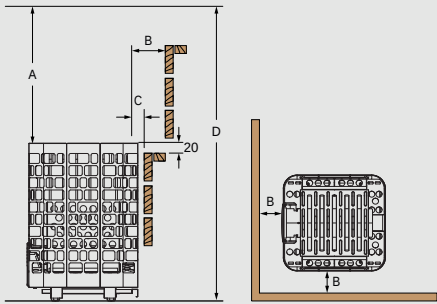

FRONT VIEW TOP VIEW
Minimum Safety Distances

- » Power range: 9,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs



Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN (m³)	MAX (m³)	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)			A	B	C	D
KRFS-90NS-P	9,0	8	14	500	460	715	160	separate	1200	100	20	1900
KRFS-105NS-P	10,5	9	15	500	460	715	160	separate	1200	100	20	1900
KRFS-120NS-P	12,0	10	18	500	460	715	160	separate	1400	100	20	2100
KRFS-150NS-P	15,0	13	23	680	460	715	210	separate	1400	100	160	2100
KRFS-180NS-P	18,0	17	29	680	460	715	210	separate	1400	100	160	2100
KRFS-180NS-V12-P	18,0	18	30	860	460	715	260	separate	1400	160	100	2100
KRFS-210NS-V12-P	21,0	22	35	860	460	715	260	separate	1400	160	100	2100
KRFS-240NS-V12-P	24,0	26	42	860	460	715	260	separate	1400	160	100	2100



Krios Floor (NS)

Krios Floor

Our trusted **Krios** heater is now available also as a floor heater with the signature SAWO pattern. With more heater stones, the **Krios Floor** will produce more steam.



Helius

Helius with its slim shape gives the user increased flexibility in terms of heater placement. This "hidden" heater can be installed behind the benches using a wall divider, which effectively renders the heater invisible to the user. Once water is poured to the water basin that remains visible, the water is then transported into the heater via a hose, heating up the room. The model also requires a much shorter than usual safety distance (min. 5mm), by adding a separate Helius hood, the safety distance can be made almost minimal.


With its advanced airflow design, the Helius uses fewer stones, which leads more airflow and better heating efficiency.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate soapstone water basin with hose
- » Optional heater guard and hood




Helius
(NS)


Technical DATA



Helius

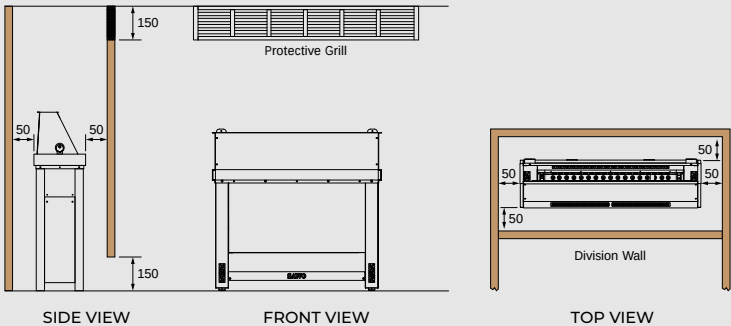

Minimum Safety Distances (Wall Divider)

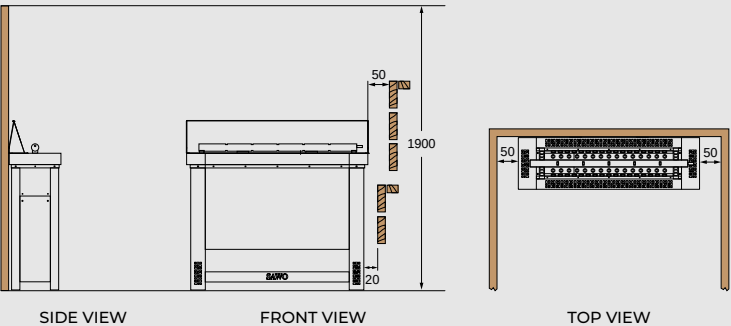

Minimum Safety Distances (Wall Installation)

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
HES-45NS-G-P-C	4,5	3	6	230	860	655	17	separate
HES-60NS-G-P-C	6,0	5	9	230	860	655	17	separate
HES-75NS-G-P-C	7,5	7	13	230	860	655	17	separate
HES-90NS-G-P-C	9,0	8	14	230	860	655	17	separate

Helius with Hood (Optional)

- » Maintain a small space for a wall divider and recess area in order to place the heater behind or below the benches.

Other features:

- » Can be installed as floor-standing or wall-mounted
- » Heater stones are not in contact with the heating elements
- » Water accessory (funnel, hose) included for wall installation with a divider
- » Can fit 17kg of stones
- » Catch pan included
- » Adjustable legs

Heater Accessories (Optional)

Helius Hood



Helius Hood
Stainless Steel

Helius Heater Guards



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF HOOD		
	LENGTH	WIDTH	HEIGHT
HP68-008	85	840	290

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
HES-GUARD-W-D	280	910	90
HES-GUARD-W-A	280	910	90



Taurus D


Taurus D revolutionizes the standard sauna heater by having two or more power options in the same heater. The heater is designed for industrial use, spas, and both public and private pools.

The Taurus D features an advanced sensory system that detects heating element malfunctions early. The stone container keeps the sauna stones apart from the heating elements, increasing the lifespan of the elements. Also, the heater features a cassette pull-out tray that makes any maintenance function simple, whether replacing the stones or the elements. This design reduces downtime and operational costs while ensuring long-term performance.


- » Power range: 9,0 – 36,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs
- » Optional heater guard



Technical DATA




Taurus D

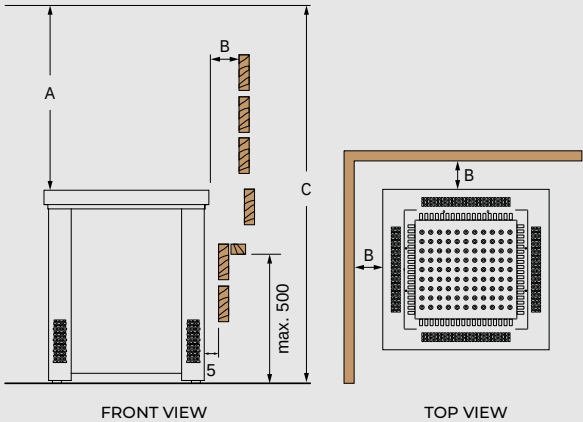

Minimum Safety Distances

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements.

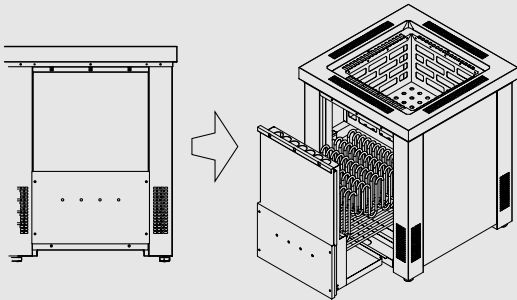

Taurus D (NS)



TRD-270/300/330/360NS-G-P

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
TRD-90/120NS-G-P	9,0 12,0	8	18	555	555	690	50	separate	1210	5/*50	1900
TRD-150/180NS-G-P	15,0 18,0	13	29	555	705	690	65-75	separate	1410	5/*50	2100
TRD-180/210/240NS-G-P	18,0 21,0 24,0	18	42	555	970	690	90-100	separate	1410	5/*50	2100
TRD-270/300/330/360NS-G-P	27,0 30,0 33,0 36,0	32	75	555	1385	690	150	separate	1410	5/*50	2100

*For commercial use.

Heater Accessories (Optional)

Taurus Heater Guards



Wooden

Cedar (D), Aspen (A), and Black (BL)

Wooden Heater Guard for TRD-90/120

Cedar (D), Aspen (A), and Black (BL)

Wooden Heater Guard for TRD-180/210/240

Cedar (D), Aspen (A), and Black (BL)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TAU-GUARD-W9-D A BL	555	105	135

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TAU-GUARD-V12-D A BL	105	705	135



Taurus D Combi

Thanks to the **Taurus D Combi**, the wellness experience is now even easier to personalize. The heater combines a steamer with the Taurus D innovation: two or more heating elements options.


With the Taurus D Combi, bathers can enjoy a traditional or a steam sauna experience. It comes with a scent basin, so the user can rejuvenate in therapeutic steam infused with their favorite essential oils and fragrances.

Using the heater is as hassle-free as it gets. It features a water level detection system that signals when the water level is low, similarly to other Combi heaters. The heater's auto-refill feature can also be activated for maximum convenience.


- » Power range: 9,0 – 36,0kW
- » Available controls: Saunova/Innova (NS)
- » Black steel casing
- » Automatic shut-off in case of overheating
- » Built-in aroma cups
- » Adjustable legs
- » Optional heater guard
- » Optional auto-refill for automatically filled water tank



Technical DATA




Taurus D Combi

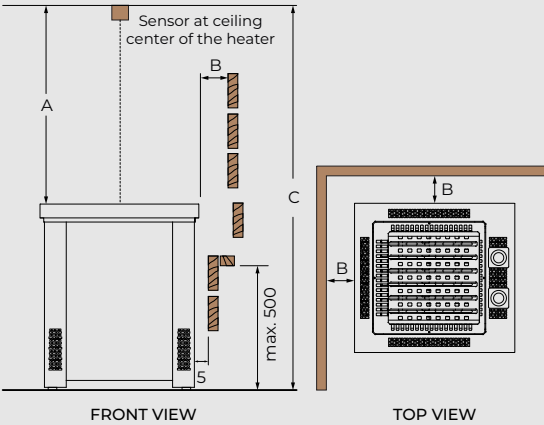

Minimum Safety Distances

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements.

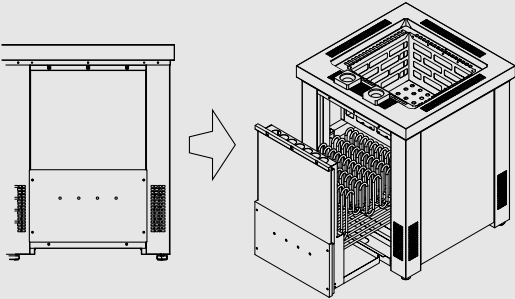

Taurus D Combi (NS)



TRDC-270/300/330/360NS-G-P

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
			MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT			A	B	C
TRDC-90/120NS-G-P	9,0 12,0	1 x 2,0	8	18	595	555	690	50	separate	1210	5/*50	1900
TRDC-150/180NS-G-P	15,0 18,0	1 x 2,0	13	29	595	705	690	65 - 75	separate	1410	5/*50	2100
TRDC-180/210/240NS-G-P	18,0 21,0 24,0	2 x 2,0	18	42	595	970	690	90 - 100	separate	1410	5/*50	2100
TRDC-270/300/330/360NS-G-P	27,0 30,0 33,0 36,0	3 x 2,0	32	75	595	1385	690	150	separate	1410	5/*50	2100

*For commercial use.

Savonia


Savonia models are designed to withstand extreme heat with the least amount of time spent on overall care and maintenance. They can also handle a large amount of stones for a smoother, lower temperature sauna experience.

The heaters come in two versions, regular and cool-to-touch fibercoating. Both versions have adjustable legs that keep the heater level on the floor.


- » Power range: 9,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs



Technical DATA



Savonia

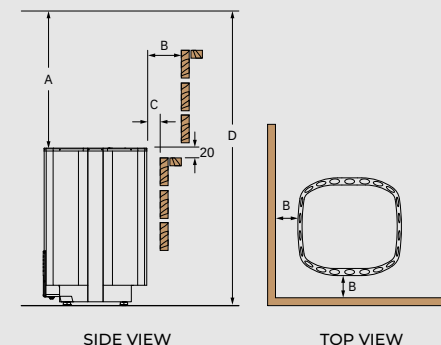

Minimum Safety Distances



Saunova/Innova (NS)


HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SAV-90NS-Z SAV-90NS-P-F	9,0	8	14	440	420	655	50 - 60	separate	1200	110	50	1900
SAV-105NS-Z SAV-105NS-P-F	10,5	9	15	440	420	655	50 - 60	separate	1200	120	60	1900
SAV-120NS-Z SAV-120NS-P-F	12,0	10	18	440	420	655	50 - 60	separate	1400	130	70	2100
SAV-150NS-Z SAV-150NS-P-F	15,0	13	23	590	420	655	60 - 75	separate	1400	160	100	2100
SAV-180NS-Z SAV-180NS-P-F	18,0	17	29	590	420	655	60 - 75	separate	1400	160	100	2100
SAV-180NS-V12-Z SAV-180NS-V12-P-F	18,0	18	30	740	420	655	80 - 100	separate	1400	160	100	2100
SAV-210NS-V12-Z SAV-210NS-V12-P-F	21,0	22	35	740	420	655	80 - 100	separate	1400	160	100	2100
SAV-240NS-V12-Z SAV-240NS-V12-P-F	24,0	26	42	740	420	655	80 - 100	separate	1400	160	100	2100




Savonia (NS)



Savonia Fibercoated (NS)



Savonia Combi

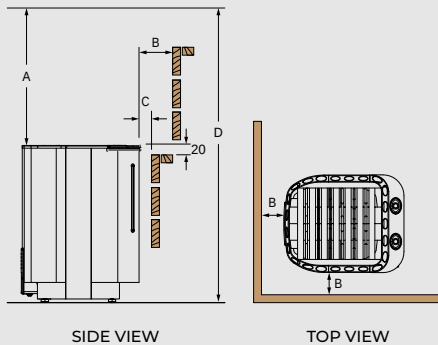

Minimum Safety Distances



Saunova/Innova (NS)

HEATER MODEL	KW HEATER	KW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SAVC-90NS-Z SAVC-90NS-P-F	9,0	1 x 2,0	8	14	510	420	655	40 - 50	separate	1200	110	50	1900
SAVC-105NS-Z SAVC-105NS-P-F	10,5	1 x 2,0	9	15	510	420	655	40 - 50	separate	1200	120	60	1900
SAVC-120NS-Z SAVC-120NS-P-F	12,0	1 x 2,0	10	18	510	420	655	40 - 50	separate	1400	130	70	2100
SAVC-150NS-Z SAVC-150NS-P-F	15,0	2 x 2,0	13	23	715	420	655	60 - 75	separate	1400	160	100	2100
SAVC-180NS-Z SAVC-180NS-P-F	18,0	2 x 2,0	17	29	715	420	655	60 - 75	separate	1400	160	100	2100



Savonia Combi (NS)



Savonia Combi Fibercoated (NS)

Savonia Combi

Savonia Combi offers the best of both worlds: the heat of a Savonia and a water tank for more steam and humidity. It is available with cool-to-touch fiber coating and an auto-refill function for the water tank.

- » Power range: 9,0 – 18,0kW
- » Available controls: Saunova/Innova (NS)
- » Built-in aroma cups
- » Separate water tank with 1,0kW or 2,0kW steam generator
- » Adjustable legs
- » Optional: auto-refill feature for automatically refilling the water tank





Sauna HEATERS

WALL-Mounted Series

SAWO Wall-mounted heaters are all about strong performance in a compact size. For added safety, most of our wall-mounted heaters are available with cool-to-touch fiber coating to help prevent accidental burns.



Mini
(NB)



Mini
Fibercoated
(NB)



Mini X
(NS | NB)



Mini X
Fibercoated
(NS | NB)



Mini Combi
(NS)



Mini Combi
Fibercoated
(NS)

Mini

Mini heater can be placed in tight spaces due to its size and reversible control unit that can be attached to either the right or the left side of the heater. The Mini is also available with cool-to-touch fiber coating.

- » Power range: 2,3 – 3,6kW
- » Available controls: Built-in (NB)

Mini X

Mini X is a space-saver that is placed in the corner of a sauna room. It is available with cool-to-touch fiber coating, and compatible with Saunova or Innova controls (NS).


- » Power range: 2,3 – 3,6kW
- » Available controls: Saunova/Innova (NS), Built-in (NB)

Mini Combi


Mini Combi combines a regular sauna experience with a water tank for increased humidity. It is available with cool-to-touch fiber-coating.

- » Power range: 3,0 – 3,6kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 1,0kW steam generator
- » Built-in aroma cups







Mini

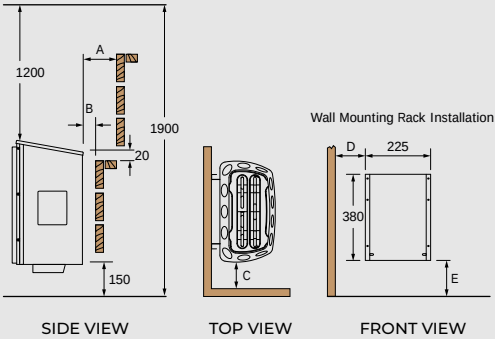


Minimum Safety Distances




Mini X

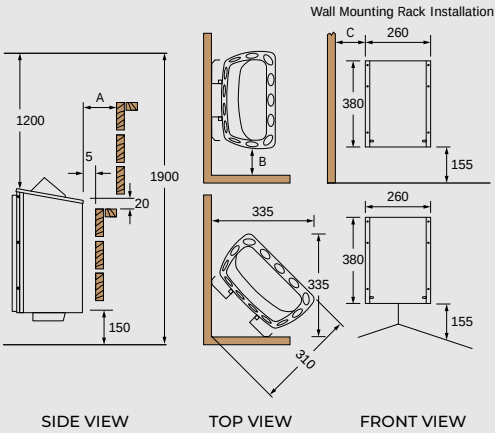

Minimum Safety Distances



Mini Combi

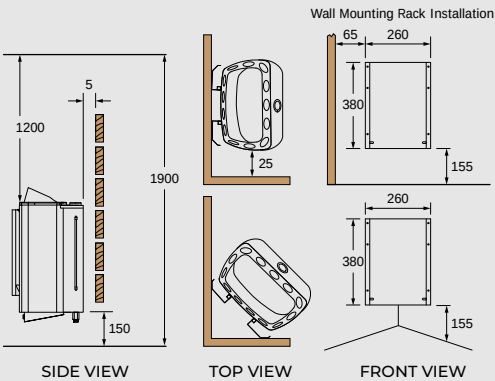

Minimum Safety Distances

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D	E
MN-23NB-Z MN-23NB-P-F	2,3	1,3	2,5	*215	435	**455	11	built-in (8+4h)	100	20	100	140	155
MN-30NB-Z MN-30NB-P-F	3,0	2	4	*215	435	**455	11	built-in (8+4h)	100	20	100	140	155
MN-36NB-Z MN-36NB-P-F	3,6	3	6	*215	435	**455	11	built-in (8+4h)	100	20	100	140	155

*Depth when installed to the wall.
**Reflector not included.

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
MX-23NS-Z MX-23NS-P-F	2,3	1,3	2,5	*310	330	485	8 - 11	separate	30	20	60
MX-30NS-Z MX-30NS-P-F	3,0	2	4	*310	330	485	8 - 11	separate	35	25	65
MX-36NS-Z MX-36NS-P-F	3,6	3	6	*310	330	485	8 - 11	separate	40	25	65

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
MX-23NB-Z MX-23NB-P-F	2,3	1,3	2,5	*310	330	485	8 - 11	built-in (8+4h)	30	20	60
MX-30NB-Z MX-30NB-P-F	3,0	2	4	*310	330	485	8 - 11	built-in (8+4h)	35	25	65
MX-36NB-Z MX-36NB-P-F	3,6	3	6	*310	330	485	8 - 11	built-in (8+4h)	40	25	65

*Wall mounted/corner mounted.

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
			MIN	MAX	LENGTH	WIDTH	HEIGHT		
MNC-30NS-Z	3,0	1 x 1,0	2	4	*330	260	*500	8 - 10,5	separate
MNC-30NS-P-F	3,0	1 x 1,0	2	4	*330	260	*500	8 - 10,5	separate
MNC-36NS-Z	3,6	1 x 1,0	3	6	*330	260	*500	8 - 10,5	separate
MNC-36NS-P-F	3,6	1 x 1,0	3	6	*330	260	*500	8 - 10,5	separate

*Depth when installed to the wall.
**Reflector not included.




Scandia

Scandia is a staple classic among sauna heaters. This simple heater gives the traditional Finnish sauna experience. It is available with cool-to-touch fiber coating, and compatible with Saunova or Innova controls (NS).

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova/Innova (NS), Built-in (NB)

Technical DATA

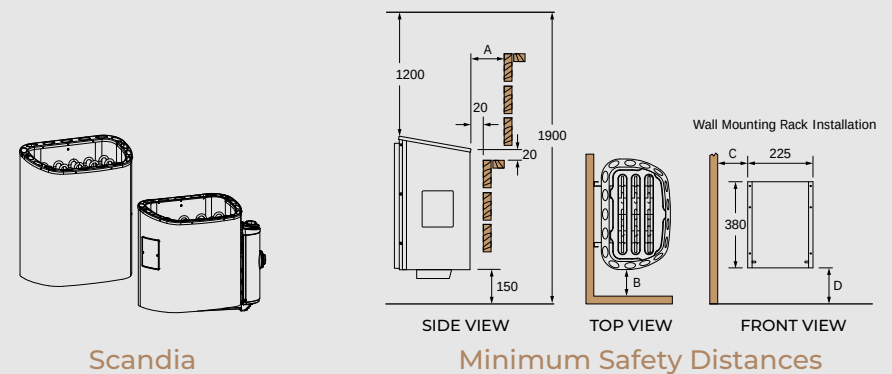

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SCA-45NS-Z-C SCA-45NS-P-F-C	4,5	3	6	*290	410	**515	18 - 22	separate	100	100	185	155
SCA-60NS-Z-C SCA-60NS-P-F-C	6,0	5	9	*290	410	**515	18 - 22	separate	100	100	185	155
SCA-80NS-Z-C SCA-80NS-P-F-C	8,0	7	13	*290	410	**585	19 - 23	separate	100	100	185	235
SCA-90NS-Z-C SCA-90NS-P-F-C	9,0	8	14	*290	410	**585	19 - 23	separate	100	100	185	235

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SCA-45NB-Z-C SCA-45NB-P-F-C	4,5	3	6	*290	515	**515	18 - 22	built-in (8+4h)	100	100	185	155
SCA-60NB-Z-C SCA-60NB-P-F-C	6,0	5	9	*290	515	**515	18 - 22	built-in (8+4h)	100	100	185	155
SCA-80NB-Z-C SCA-80NB-P-F-C	8,0	7	13	*290	515	**585	19 - 23	built-in (8+4h)	100	100	185	235
SCA-90NB-Z-C SCA-90NB-P-F-C	9,0	8	14	*290	515	**585	19 - 23	built-in (8+4h)	100	100	185	235

*Depth when installed to the wall.


**Reflector not included.

Scandia Combi


Scandia Combi heater comes with a water tank for increased humidity and an aroma cup for using sauna scents. Available with cool-to-touch fiber coating, and compatible with Saunova or Innova controls (NS).

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 1,0kW or 2,0kW steam generator
- » Built-in aroma cups

Technical DATA



Scandia Combi

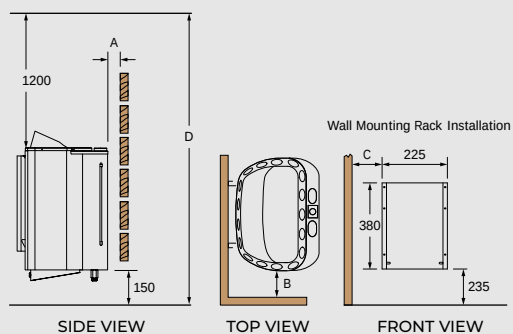

Minimum Safety Distances

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM MIN MAX (m³)	SIZE OF HEATER LENGTH WIDTH HEIGHT (mm)	STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
SCAC-60NS-Z-C SCAC-60NS-P-F-C	6,0	1 x 1,0	5 9	*365 410 595	18-22	separate	A	B	C	D
SCAC-80NS-Z-C SCAC-80NS-P-F-C	8,0	1 x 2,0	7 13	*365 410 595	18-22	separate	5	50	135	1900
SCAC-90NS-Z-C SCAC-90NS-P-F-C	9,0	1 x 2,0	8 14	*365 410 595	18-22	separate	5	50	135	1900

*Depth when installed to the wall.



Scandia Combi (NS)



Scandia Combi Fibercoated (NS)

Krios

Krios provides a larger stone container for higher and more humid heat. It also features the signature SAWO pattern in a stainless steel casing. The Krios heater is compatible with Saunova (Ni2, NS), and Innova (NS) controls.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Wall mounted
- » Casing: Stainless steel
- » Heat reflector included
- » Built-in control unit can be attached to the left, right, or front of the heater
- » Can fit 50kg of stones



Krios
(Ni2)




Krios
(NS)



Krios
(NB)



Technical DATA

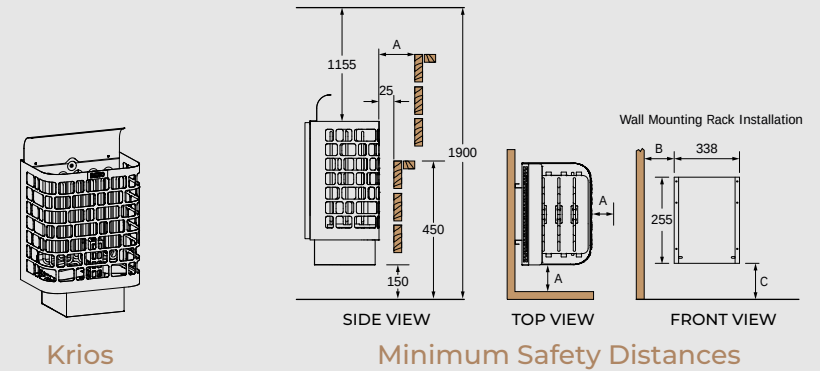

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
KRI-45Ni2-P-C	4,5	3	6	*290	390	**600	40	Saunova 2.0	50	75	345
KRI-60Ni2-P-C	6,0	5	8	*290	390	**600	40	Saunova 2.0	80	105	345
KRI-80Ni2-P-C	8,0	7	13	*290	390	**670	50	Saunova 2.0	100	125	415
KRI-90Ni2-P-C	9,0	8	14	*290	390	**670	50	Saunova 2.0	100	125	415

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
KRI-45NS-P-C	4,5	3	6	*290	390	**580	40	Innova	50	75	320
KRI-60NS-P-C	6,0	5	8	*290	390	**580	40	Innova	80	105	320
KRI-80NS-P-C	8,0	7	13	*290	390	**650	50	Innova	100	125	390
KRI-90NS-P-C	9,0	8	14	*290	390	**650	50	Innova	100	125	390

Built-in (NB)


HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
KRI-45NB-P-C	4,5	3	6	*290	390	**580	40	Built-in	50	75	320
KRI-60NB-P-C	6,0	5	8	*290	390	**580	40	Built-in	80	105	320
KRI-80NB-P-C	8,0	7	13	*290	390	**650	50	Built-in	100	125	390
KRI-90NB-P-C	9,0	8	14	*290	390	**650	50	Built-in	100	125	390

*Depth when installed to the wall.

**Height with reflector.

Heater Accessories (Optional)

Krios Heater Guards



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
KRI-GUARD-W-D	385	620	90
KRI-GUARD-W-A	385	620	90



Nordex

Nordex heater is available with stainless steel or black metal casing, and compatible with separate Saunova (Ni2/NS) and Innova (NS) controls.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)



Nordex (Ni2)



Nordex Black (Ni2)



Nordex (NS)



Nordex Black (NS)




Nordex (NB)




Nordex Black (NB)


Technical DATA




Nordex



SIDE VIEW



TOP VIEW



FRONT VIEW

Minimum Safety Distances

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRN-45Ni2-Z-C NRN-45Ni2-BL-Z-C	4,5	3	6	*295	400	**515	22	Saunova 2.0	50	50	130	270
NRN-60Ni2-Z-C NRN-60Ni2-BL-Z-C	6,0	5	9	*295	400	**515	22	Saunova 2.0	50	50	130	270
NRN-80Ni2-Z-C NRN-80Ni2-BL-Z-C	8,0	7	13	*295	400	**590	22	Saunova 2.0	80	80	160	330
NRN-90Ni2-Z-C NRN-90Ni2-BL-Z-C	9,0	8	14	*295	400	**590	22	Saunova 2.0	80	80	160	330

Built-in (NB) and Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	WIDTH	DEPTH	HEIGHT			A	B	C	D
NRN-45NB/NS-Z-C NRN-45NB/NS-BL-Z-C	4,5	3	6	*295	400	**515	18-22	built-in (8+4h)	50	50	80	320
NRN-60NB/NS-Z-C NRN-60NB/NS-BL-Z-C	6,0	5	9	*295	400	**515	18-22	built-in (8+4h)	50	50	80	320
NRN-80NB/NS-Z-C NRN-80NB/NS-BL-Z-C	8,0	7	13	*295	400	**590	18-22	built-in (8+4h)	80	80	110	395
NRN-90NB/NS-Z-C NRN-90NB/NS-BL-Z-C	9,0	8	14	*295	400	**590	18-22	built-in (8+4h)	80	80	110	395

*Depth when installed to the wall.

**Height with reflector.

Heater Accessories (Optional)

Nordex Heater Guards



Wooden Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
NRN-GUARD-W-D	100	465	75
NRN-GUARD-W-A	100	465	75

Nordex Combi

Nordex Combi adds humidity to the heat with its water tank. It is available with stainless steel or black metal casing, and compatible with separate Saunova and Innova (NS) controls.

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW or 2,0kW steam generator
- » Built-in aroma cups

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM MAX (m ³)	SIZE OF HEATER LENGTH WIDTH HEIGHT (mm)	STONES (kg)	CONTROL
NRNC-60NS-Z-C NRNC-60NS-BL-Z-C	6,0	1 x 0,8	5 9	**385 400 *610	22	Innova
NRNC-80NS-Z-C NRNC-80NS-BL-Z-C	8,0	1 x 2,0	7 13	**385 400 *610	22	Innova
NRNC-90NS-Z-C NRNC-90NS-BL-Z-C	9,0	1 x 2,0	8 14	**385 400 *610	22	Innova

**Depth when installed to the wall.

*Height with reflector.




Nordex Combi (NS)




Nordex Combi Black (NS)



Technical DATA



Nordex Combi

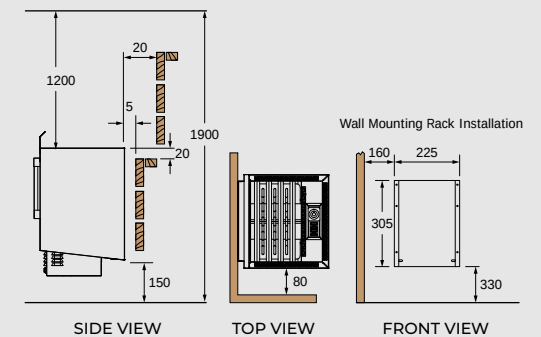

Minimum Safety Distances

Nordex Mini

The ultra-compact **Nordex Mini** can be wall-mounted into a straight or corner position. It is available with stainless steel or black metal casing, and compatible with separate Saunova (Ni2, NS) and Innova (NS) controls.

- » Power range: 2,3 – 3,6kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)

! For more technical information, see page 61.



Nordex Mini
(Ni2)

Nordex Mini Black
(Ni2)



Nordex Mini
(NS)

Nordex Mini Black
(NS)



Nordex Mini
(NB)

Nordex Mini Black
(NB)

Nordex Mini Combi

The ultra-compact **Nordex Mini Combi** adds humidity to the heat with its water tank. It is available with stainless steel or black metal casing, and compatible with separate Saunova (NS) and Innova (NS) controls.

- » Power range: 3,0 – 3,6kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW steam generator
- » Built-in aroma cups

! For more technical information, see page 61.




Nordex Mini Combi
(NS)




Nordex Mini Combi
Black
(NS)




Technical DATA




Nordex Mini

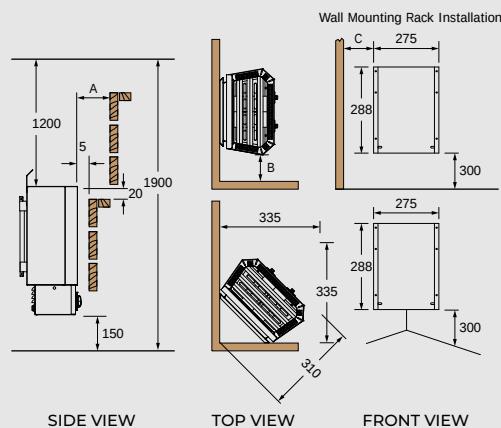

Minimum Safety Distances



Nordex Mini Combi

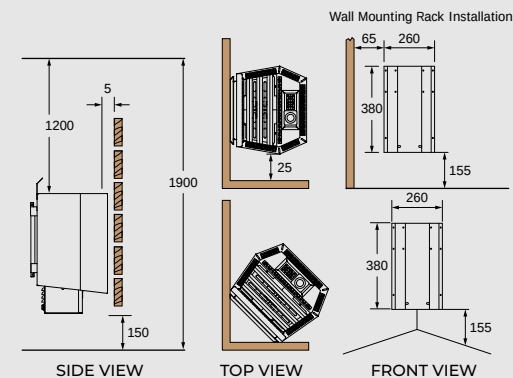

Minimum Safety Distances

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN (m³)	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C
NRM-23Ni2-Z-C	2,3	1,3	2,5	*200	340	**500	8 - 11	Saunova	50	30	85
NRM-30Ni2-Z-C	3,0	2	4	*200	340	**500	8 - 11	Saunova	50	30	85
NRM-36Ni2-Z-C	3,6	3	6	*200	340	**500	8 - 11	Saunova	50	30	85

*Depth when installed to the wall.

**Height with reflector.

Saunova/Innova (NS)

HEATER MODEL	kW	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
				MIN (m³)	MAX	LENGTH	WIDTH (mm)	HEIGHT		
NRMC-30NS-Z	3,0	1 x 0,8	2	4		*300	345	**525	8 - 10,5	separate
NRMC-36NS-Z	3,6	1 x 0,8	3	6		*300	345	**525	8 - 10,5	separate

*Depth when installed to the wall.

**Height with reflector.

Saunova/Innova (NS) and Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN (m³)	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C
NRM-23NS-Z	2,3	1,3	2,5	*200	340	**500	8 - 11	separate	30 50	20 30	60 85
NRM-23NS-Z	3,0	2	4	*200	340	**500	8 - 11	separate	35 50	25 30	65 85
NRM-36NS-Z	3,6	3	6	*200	340	**500	8 - 11	separate	40 50	25 30	65 85
NRM-23NB-Z	2,3	1,3	2,5	*200	340	**500	8 - 11	built-in (8+4h)	30 50	20 30	60 85
NRM-30NB-Z	3,0	2	4	*200	340	**500	8 - 11	built-in (8+4h)	35 50	25 30	65 85
NRM-36NB-Z	3,6	3	6	*200	340	**500	8 - 11	built-in (8+4h)	40 50	25 30	65 85

*Depth when installed to the wall.

**Height with reflector.



Scandifire

Scandifire by Stefan Lindfors gives the classic Scandia model a bolder, unique look with its Junglefired pattern. The pattern is combined with cool-to-touch fiber coating, and the heater is compatible with Saunova and Innova controls (NS).

! For more technical information, see page 64.

Scandifire

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova/ Innova (NS), Built-in (NB)
- » Casing: Fibercoated with Junglefired pattern
- » Wall mounted
- » Can fit 22kg of stones
- » Built-in models: Control knobs are with light indicator
- » Coating shields the heater from moisture and high temperature



Scandifire Red
(NB)



Scandifire Black
(NB)



Scandifire Red
(NS)



Scandifire Black
(NS)



Minidragon

Minidragon is the most compact of the heaters designed by Stefan Lindfors, developed to decorate even tighter spaces with beauty. The heater comes with cool-to-touch fiber coating, and it is compatible with Saunova and Innova controls (NS).

! For more technical information, see page 64.



Minidragon Red
(NB)



Minidragon Black
(NB)



Minidragon Red
(NS)




Minidragon Black
(NS)


Minidragon

- » Power range: 2,3 – 3,6kW
- » Available controls: Saunova/ Innova (NS), Built-in (NB)
- » Casing: Fibercoated with Junglefire pattern
- » Wall mounted
- » Can fit 11kg of stones
- » Built-in models: Control knobs are with light indicator


Technical DATA




Scandifire

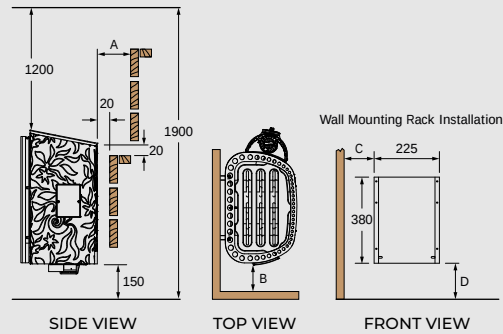

Minimum Safety Distances



Minidragon

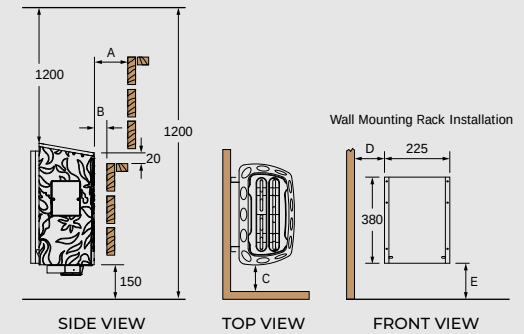

Minimum Safety Distances

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SCA-45NS-DRF-P-C SCA-45NS-DRF-BL-P-C	4,5	3	6	*290	410	455	18 - 22	separate	60	50	135	155
SCA-60NS-DRF-P-C SCA-60NS-DRF-BL-P-C	6,0	5	9	*290	410	455	18 - 22	separate	60	50	135	155
SCA-80NS-DRF-P-C SCA-80NS-DRF-BL-P-C	8,0	7	13	*290	410	525	18 - 22	separate	60	50	135	235
SCA-90NS-DRF-P-C SCA-90NS-DRF-BL-P-C	9,0	8	14	*290	410	525	18 - 22	separate	60	50	135	235

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D	E
MN-23NS-DRF-P MN-23NS-DRF-BL-P	2,3	1,3	2,5	*215	435	455	8 - 11	separate	50	20	40	90	155
MN-30NS-DRF-P MN-30NS-DRF-BL-P	3,0	2	4	*215	435	455	8 - 11	separate	60	20	50	90	155
MN-36NS-DRF-P MN-36NS-DRF-BL-P	3,6	3	6	*215	435	455	8 - 11	separate	90	20	50	90	155

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SCA-45NB-DRF-P-C SCA-45NB-DRF-BL-P-C	4,5	3	6	*290	515	455	18 - 22	built-in (8+4h)	50	50	185	155
SCA-60NB-DRF-P-C SCA-60NB-DRF-BL-P-C	6,0	5	9	*290	515	455	18 - 22	built-in (8+4h)	50	50	185	155
SCA-80NB-DRF-P-C SCA-80NB-DRF-BL-P-C	8,0	7	13	*290	515	525	18 - 22	built-in (8+4h)	100	100	185	235
SCA-90NB-DRF-P-C SCA-90NB-DRF-BL-P-C	9,0	8	14	*290	515	525	18 - 22	built-in (8+4h)	100	100	185	235

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D	E
MN-23NB-DRF-P MN-23NB-DRF-BL-P	2,3	1,3	2,5	*215	435	455	8 - 11	built-in (8+4h)	50	20	40	140	155
MN-30NB-DRF-P MN-30NB-DRF-BL-P	3,0	2	4	*215	435	455	8 - 11	built-in (8+4h)	60	20	50	140	155
MN-36NB-DRF-P MN-36NB-DRF-BL-P	3,6	3	6	*215	435	455	8 - 11	built-in (8+4h)	90	20	80	140	155

*Depth when installed to the wall.

*Depth when installed to the wall.



Sauna HEATERS

STONE Series

Made of Finnish soapstone, the SAWO Stone Heaters have exceptional heat-storing and conducting properties. Their gentle heat provides a consistent and long-lasting sauna experience.

Nimbus

The striking **Nimbus** heater features a soapstone casing that provides long-lasting heat. The Nimbus is compatible with Saunova and Innova controls (NS).

- » Power range: 9,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)



Saunova/Innova (NS)


HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN (m³)	MAX (m³)	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)				A	B	C	D
NIM-90NS-P	9,0	8	14	520	470	690	40-50	80	separate	1200	110	50	1900
NIM-105NS-P	10,5	9	15	520	470	690	40-50	80	separate	1200	120	60	1900
NIM-120NS-P	12,0	10	18	520	470	690	40-50	80	separate	1400	130	70	2100
NIM-150NS-P	15,0	13	23	660	470	690	60-75	100	separate	1400	160	100	2100
NIM-180NS-P	18,0	17	29	660	470	690	60-75	100	separate	1400	160	100	2100
NIM-180NS-V12-P	18,0	18	30	820	470	690	80-100	120	separate	1400	160	100	2100
NIM-210NS-V12-P	21,0	22	35	820	470	690	80-100	120	separate	1400	160	100	2100
NIM-240NS-V12-P	24,0	26	42	820	470	690	80-100	120	separate	1400	160	100	2100




Nimbus
(NS)



Technical DATA



Nimbus

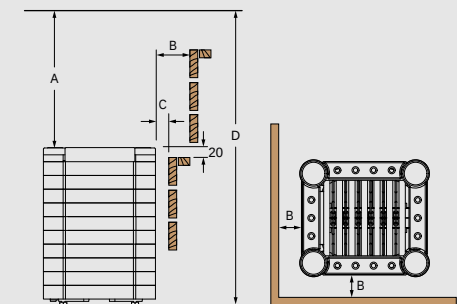

FRONT VIEW

TOP VIEW

Minimum Safety Distances



Nimbus Combi

Nimbus Combi ramps up the steam with its water tank for a perfect balance of heat and humidity. The heater is compatible with Saunova and Innova controls (NS).


- » Power range: 9,0 – 18,0kW
- » Available controls: Saunova/Innova (NS)
- » Built-in aroma cups
- » Optional: auto-refill feature for automatically refilling the water tank




Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX (m³)	LENGTH	WIDTH	HEIGHT (mm)				A	B	C	D
NIMC-90NS-P	9,0	1 x 2,0	8	14	575	470	690	40 - 50	90	separate	1200	50	30	1900
NIMC-105NS-P	10,5	1 x 2,0	9	15	575	470	690	40 - 50	90	separate	1200	50	30	1900
NIMC-120NS-P	12,0	1 x 2,0	10	18	575	470	690	40 - 50	90	separate	1400	130	70	2100
NIMC-150NS-P	15,0	2 x 2,0	13	23	775	470	690	60 - 75	120	separate	1400	160	100	2100
NIMC-180NS-P	18,0	2 x 2,0	17	29	775	470	690	60 - 75	120	separate	1400	160	100	2100

Technical DATA



Nimbus Combi

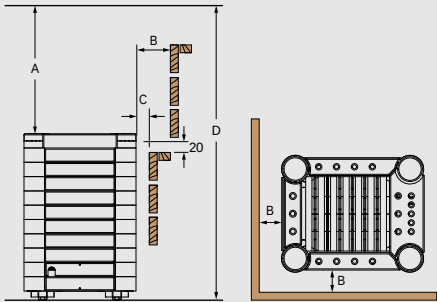


Minimum Safety Distances




Nimbus Combi (NS)



Technical DATA



Cumulus

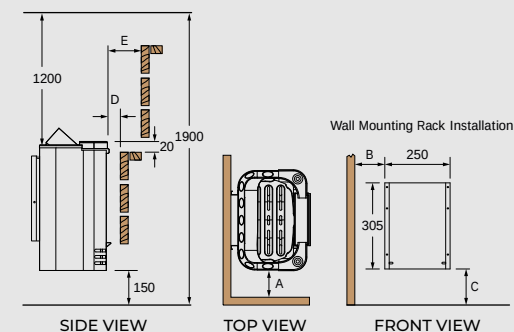

Minimum Safety Distances

Cumulus

Cumulus is an elegant wall-mounted with decorative Finnish soapstone front. Add aromatherapy to the sauna by using the aroma cups provided in the top of the heater.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Built-in aroma cups



Cumulus
(Ni2)

Cumulus
(NS)

Cumulus
(NB)

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT				A	B	C	D	E
CML-45Ni2-P-C	4,5	3	6	*300	420	500	18	22	Saunova	50	130	245	20	50
CML-60Ni2-P-C	6,0	5	9	*300	420	500	18	22	Saunova	50	130	245	20	50
CML-80Ni2-P-C	8,0	7	13	*300	420	590	18	22	Saunova	60	140	330	30	60
CML-90Ni2-P-C	9,0	8	14	*300	420	590	18	22	Saunova	60	140	330	30	60

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT				A	B	C	D	E
CML-45NS-P-C	4,5	3	6	*300	420	500	18	22	separate	50	130	245	20	50
CML-60NS-P-C	6,0	5	9	*300	420	500	18	22	separate	50	130	245	20	50
CML-80NS-P-C	8,0	7	13	*300	420	590	18	22	separate	60	140	330	30	60
CML-90NS-P-C	9,0	8	14	*300	420	590	18	22	separate	60	140	330	30	60

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT				A	B	C	D	E
CML-45NB-P-C	4,5	3	6	*300	420	500	18	22	built-in (8+4h)	50	130	245	20	50
CML-60NB-P-C	6,0	5	9	*300	420	500	18	22	built-in (8+4h)	50	130	245	20	50
CML-80NB-P-C	8,0	7	13	*300	420	590	18	22	built-in (8+4h)	60	140	330	30	60
CML-90NB-P-C	9,0	8	14	*300	420	590	18	22	built-in (8+4h)	60	140	330	30	60

*Depth when installed to the wall.

HEATER Accessories

Safety Switch

(for wall-mounted, tower, and floor heaters)



Safety Switch

code: HP20-001

The safety switch will turn the heater off if a towel or similar object is placed on top. The heater will not turn off if it comes into contact with a foreign object or if the object enters the safety distances around the heater. (Follows standard SFS-EN60335-2-53, sec. 19.101)

Emergency Stop



Emergency Stop Button Switch

code: ESTOP

The push button allows the sauna heater to be switched off. Package includes extra overheat fuse.

Cozy Tank

- » Water storage that adds instant steam when heater is hot
- » Refillable water via top cover holes
- » Thick stainless metal
- » Carved soapstone top cover
- » Available in 3 designs
- » Scent pockets for sauna aroma



Cozy Tank 0,3L

code: HP01-090

Cylindrical Sauna Humidifier
(Water Volume 0,3L)



Cozy Tank 0,6L

code: HP01-070

Cylindrical Sauna Humidifier
(Water Volume 0,6L)



Cozy Tank 1,3L

code: HP01-071

Rectangular Sauna Humidifier
(Water Volume 1,3L)

WATER VOLUME	HEATERS
0,3 Liter	Tower (Round, Wall, Corner), Aries (Round, Wall, Corner), Phoenix, Orion, Cubos
0,6 Liter	Tower (Round, Wall, Corner), Aries (Round, Wall, Corner), Phoenix, Orion, Cubos
1,3 Liter	Taurus, Mini, Mini X, Scandia, Savonia, Nordex Mini, Nordex, Nordex Floor, Nimbus, Cumulus



Sauna Stones



Sauna Stones
Rounded (20kg)

code: size:
R-980 3-10cm
R-981 8-15cm



Decorative Sauna Stones
White Quartz Rounded (10kg)

code: size:
R-982 3-10cm
R-983 8-15cm

SAUNA Controls

Pleasurable moments are just few clicks away.



SAWO Sense



The **SAWO Sense** takes smart sauna control to the next level with its sleek touchscreen interface. It offers effortless management of temperature, lighting, and other sauna functions through both its intuitive display and the SAWO app via built-in Wi-Fi connectivity.

With real-time monitoring and remote access, users can customize and control their sauna sessions anytime, anywhere. Designed for heaters up to 9,0kW, the system can be extended to 18,0kW with a contactor unit, ensuring flexibility for saunas of all sizes.



SAWO Sense Metal
code: SEN-UI-SST



SAWO Sense Black
code: SEN-UI-BL



SAWO Sense Pinaceae
code: SEN-UI-PC



SAWO Sense White
code: SEN-UI-WH



Saunova 2.0 PLUS

Our new smart sauna control unit, the **Saunova 2.0 PLUS**, gives the user even more freedom of use.

The control unit includes Wi-Fi connectivity, meaning that it can be controlled via the SAWO app. The app allows for a more customized sauna experience and remote control of multiple sauna functions, such as temperature and lighting. With real-time monitoring, the app user gets instant access to the current sauna temperature and session time.


The Saunova 2.0 PLUS comes with an intuitive user interface that can be placed inside or outside the sauna room.


Engineered for heaters of up to 9,0kW, the Saunova 2.0 PLUS can also be extended to 18,0kW with a contactor unit.



Saunova 2.0 PLUS (SAU-UI-V2-PLUS)


- » Remote control: Set schedule and control the heater from anywhere and any distance.
- » Intuitive interface: Use the app and controls with ease, thanks to our streamlined UI/UX design.
- » Integrated controls: All control settings can be managed through one platform: the smart control or the mobile app.
- » Real-time monitoring: Get instant access to the current sauna temperature and session time.
- » Safety: Heaters automatically turn off when the timer reaches zero.





Saunova 2.0 (SAU-UI-V2)

- » Dimensions: (L) 37 x (W) 104 x (H) 147mm
- » Direct control for all Ni2 heaters, for NS Heaters 2,3 – 9,0kW add Saunova 2.0 Power Controller, for 9,0 – 18,0kW add Saunova 2.0 Contactor Unit
- » Power Controller
- » More than 9,0kW needs a Contactor
- » Smart heater control feature for automatic heat control
- » Optional Fan and Combi features



Saunova 2.0 Built-in (SAU-B-V2)


- » Dimensions: (L) 80 x (W) 320 x (H) 270mm
- » Combined User Interface and Power Controller
- » For all NS heaters 2,3 – 9,0kW, for 9,0 – 18,0kW add Saunova 2.0 Contactor Unit
- » Smart heater control feature for automatic heat control
- » Compatible with Door Sensor
- » Optional Fan and Combi features

Saunova 2.0 Power Controller (SAU-PC-V2)

Saunova 2.0 Contactor Unit (SAU-PS-V2)



! Required for higher than a 9,0kW power supply.




Saunova Simple (SAU-UI-S)

- » Dimensions: (L) 37 x (W) 104 x (H) 147mm
- » For those looking for simplicity on sauna heater control. Enables the to focus on the basics, turning the heater on / off.



Innova Classic 2.0 (INC-S-V2)

- » Dimensions: (L) 37 x (W) 104 x (H) 147mm
- » Direct control for all Ni heaters, for NS heaters 2,3 – 15,0kW add the Innova 2.0 Power Controller, for 15,0 – 30,0kW add Innova 2.0 Contactor Unit
- » Smart heater control feature for automatic heat control
- » Compatible with Door Sensor
- » Optional Fan and Combi features



Innova Classic 2.0 Built-in (INC-B-V2)


- » Dimensions: (L) 80 x (W) 320 x (H) 270mm
- » Combined User Interface and Power Controller
- » For all NS Heaters 2,3 – 15,0kW, connect with Innova 2.0 Contactor Unit for 15,0 – 30,0kW heaters
- » Smart heater control feature for automatic heat control
- » Optional Fan and Combi features



Innova Stainless Steel Touch (INT-S-SST)


- » Dimensions: (L) 37 x (W) 147 x (H) 104mm
- » Direct control for all Ni heaters, for NS heaters 2,3 – 15,0kW add the Innova 2.0 Power Controller, for 15,0 – 30,0kW add Innova 2.0 Contactor Unit
- » Smart heater control feature for automatic heat control
- » Compatible with Door Sensor
- » Optional easy mode
- » Power blackout memory
- » Optional Fan, Dimmer and Combi features





Innova Classic (INC-S)

- » Dimensions: (L) 31 x (W) 180 x (H) 105mm
- » Direct control for all Ni heaters, for NS heaters 2,3 – 15,0kW add the Innova 2.0 Power Controller, for 15,0 – 30,0kW add the Innova 2.0 Contactor Unit
- » Smart heater control feature for automatic heat control
- » Compatible with Door Sensor
- » Pre-run timer
- » Optional Fan, Dimmer and Combi features



Innova Classic Built-in (INC-B)

- » Dimensions: (L) 75 x (W) 245 x (H) 265mm
- » Combined User Interface and Power Controller
- » For all NS Heaters 2,3 – 15,0kW, for 15,0 – 30,0kW add the Innova 2.0 Contactor Unit
- » Smart heater control feature for automatic heat control
- » Optional Fan, Dimmer and Combi features

Innova 2.0 Power Controller (INP-C-V2)



Innova 2.0 Contactor Unit (INP-S-V2)



⚠ Required for higher than a 9,0kW power supply.



INCLUSIONS



RJ12 Cable

code:	length:
INN-R50	50m
INN-R25	25m
INN-R10	10m
INN-R5	5m



Temperature Sensor with Fuse
INN-FTEMP

OPTIONAL ITEMS

INTERFACE HOLDERS

» For Saunova 2.0, Innova Classic 2.0, Innova Stainless Steel Touch, Innova Classic, Steam 2.0, Steam Stainless Steel Touch, and Steam STE controls



INN-IH23-PC | INN-IH23-A | INN-IH23-D



INN-IH10-PC | INN-IH10-A | INN-IH10-D



INN-IH20-PC | INN-IH20-A | INN-IH20-D

TEMPERATURE SENSORS



Additional Second Temperature Sensor
INN-BTEMP



Additional Humidity and Temperature Sensor
INN-HUM

SAUNA Accessories

Our outstanding collection of sauna accessories from ladles to pails and complete accessory sets complements any sauna design.



Rustic

The **Rustic set** blends class and environmentally conscious design with practical innovation. Some parts may feature finger-jointed wood - a zero-waste, nature-friendly solution where every part of the wood has a purpose.

code: SET-RUSTIC

SET INCLUDES: Wooden Pail 4L Rustic, Wooden Ladle Rustic (42cm), Wooden Thermometer Rustic, Wooden Sandtimer Rustic, Aroma Cup, Aroma Oil Eucalyptus Scent (250ml), Sauna Signage Rustic Pinaceae, and Sauna Guidelines Rustic Pinaceae

codes: 339-PD, 430-PD, 220-TPD, 553-PD, R-100, ARO-EUCA250, 950-D, and 955-D



Essential

The **Essential set** takes comfort and style to the next level, offering a wider collection of essential sauna items to enjoy.

code: SET-ESS

SET INCLUDES: Wooden Pail 4L Western Red Cedar, Wooden Ladle Western Red Cedar (42cm), Wooden Thermohygrometer Western Red Cedar, Wooden Sandtimer Western Red Cedar, Aroma Cup, Aroma Oil Eucalyptus Scent (250ml), Sauna Signage Cedar, and Sauna Guidelines Cedar

codes: 340-D, 430-D, 221-TFHD, 553-D, R-100, ARO-EUCA250, 950-D, and 955-D





Signature

The distinguished **Signature set** is for those seeking an elegant and sophisticated sauna experience fit for even the highest demands.

code: SET-SIG-BL

SET INCLUDES: Wooden Pail Kanto 4L Black, Wooden Ladle Puro (51cm) Black, Thermo-Hygrometer Square Black, Wooden Sandtimer Black, Wooden Pillow Wave Black, Aroma Cup, Aroma Oil Eucalyptus Scent (250ml), Sauna Signage Black, and Sauna Guidelines Cedar

codes: 347-BL, 459-BL, 225-THBL, 554-BL, 515-BL, R-100, ARO-EUCA250, 950-BL, and 955-D

code: SET-SIG-D

SET INCLUDES: Wooden Pail Kanto 4L Cedar, Wooden Ladle Puro (51cm) Cedar, Thermo-Hygrometer Square Cedar, Wooden Sandtimer Cedar, Wooden Pillow Wave Cedar, Aroma Cup, Aroma Oil Eucalyptus Scent (250ml), Sauna Signage Cedar, and Sauna Guidelines Cedar

codes: 347-D, 459-D, 225-THD, 554-D, 515-D, R-100, ARO-EUCA250, 950-D, and 955-D



Dragon

With unparalleled style and innovation, the **Dragon set** offers a unique, bold look with added flair.

code: SET-DRAGON

SET INCLUDES: Dragon Pail 4L Cedar, Wooden Ladle Dragon Cedar, Thermo-Hygrometer Square Cedar, Wooden Sandtimer Cedar, Wooden Pillow Wave Cedar, Aroma Cup, Aroma Oil Eucalyptus Scent (250ml), Sauna Signage Cedar, and Sauna Guidelines Cedar

codes: 342-D, 449-D, 225-THD, 553-D, 515-D, R-100, ARO-EUCA250, 950-D, and 955-D

code: SET-DRAGON-BL

SET INCLUDES: Dragon Pail 4L Black, Wooden Ladle Dragon Black, Thermo-Hygrometer Square Black, Wooden Sandtimer Black, Wooden Pillow Wave Black, Aroma Cup, Aroma Oil Eucalyptus Scent (250ml), Sauna Signage Black, and Sauna Guidelines Cedar

codes: 342-BL, 449-BL, 225-THBL, 553-BL, 515-BL, R-100, ARO-EUCA250, 950-BL, and 955-D



PAIL Shower

The **pail shower** is with a rope on the lever, hose and float valve. Its arc shaped holder design gives more possibilities to place shower either on the ceiling or to the wall. Pail shower is suitable for indoor or outdoor use. The hose needs to be connected to a water inlet so when water is flushed out, the pail will automatically be refilled – a never ending pail shower!



Pail Shower

code: 393-PC | D | BL
capacity: 18L
option: Pinaceae | Cedar | Black



Wall Installation



Ceiling Installation



Pails



Kanto

code: 347-PC | 347-WH | 347-BL
capacity: 4L
option: Pinaceae | White | Black



Lovi

code: 346-PC | 346-WH | 346-BL
capacity: 4L
option: Pinaceae | White | Black



Usva

code: 374-MA | 374-MD
capacity: 5L
option: Aspen | Cedar



**Stainless Steel Pail
with Curved Handle**

code: 373-MA | 373-MD
capacity: 5L
option: Aspen | Cedar



**Stainless Steel Pail
with Wooden Handle**

code: 375-MPC | 375-MA | 375-MD
capacity: 5L
option: Pinaceae | Aspen | Cedar



**Wooden Pail Rattan
with Stainless Steel Insert**

code: 371-MPC | 371-MA | 371-MD
capacity: 5L
option: Pinaceae | Aspen | Cedar



**Dragon Pail
4L**

code: 342-D | 342-BL
capacity: 4L
option: Cedar | Black



**Dragon Pail
9L**

code: 300-D | 300-BL
capacity: 9L
option: Cedar | Black



**Wooden Pail
Traditional**

code: 300-TPC | 300-TA | 300-TD
capacity: 9L
option: Pinaceae | Aspen | Cedar



**Wooden Pail
Rattan**

code: 300-HPC | 300-HA | 300-HD
capacity: 9L
option: Pinaceae | Aspen | Cedar



**Wooden Pail
Rustic**

code: 339-PD
capacity: 4L
option: Rustic



**Wooden Pail
Classic**

code: 340-PC | 340-A | 340-D
capacity: 4L
option: Pinaceae | Aspen | Cedar



**Wooden Pail
Rattan**

code: 341-PC | 341-A | 341-D
capacity: 4L
option: Pinaceae | Aspen | Cedar



**Steamwater Pail
4L**

code: 342-D-DRF | 342-BL-DRF
capacity: 4L
option: Cedar | Black



**Steamwater Pail
9L**

code: 300-D-DRF | 300-BL-DRF
capacity: 9L
option: Cedar | Black



**Wooden Pail
18L**

code: 381-PC |
381-A |
381-D
capacity: 18L
option: Pinaceae | Aspen | Cedar



**Wooden Cover
for 381**

code: 381-PC-COV |
381-A-COV |
381-D-COV
use: Cover for 381 pail
option: Pinaceae | Aspen | Cedar



**Wooden Pail
28L**

code: 391-PC |
391-A |
391-D
capacity: 28L
option: Pinaceae | Aspen | Cedar



**Wooden Cover
for 391**

code: 391-PC-COV |
391-A-COV |
391-D-COV
use: Cover for 391 pail
option: Pinaceae | Aspen | Cedar



**Wooden Pail
40L**

code: 392-PC |
392-A |
392-D
capacity: 40L
option: Pinaceae | Aspen | Cedar



**Wooden Cover
for 392**

code: 392-PC-COV |
392-A-COV |
392-D-COV
use: Cover for 392 pail
option: Pinaceae | Aspen | Cedar

Ladles



Wooden Ladle
Standard 36cm

code: 430-PC | 430-A | 430-D
size: 360mm
option: Pinaceae | Aspen | Cedar



Wooden Ladle
Standard 42cm

code: 440-PC | 440-A | 440-D
size: 420mm
option: Pinaceae | Aspen | Cedar



Wooden Ladle
Standard 52cm

code: 443-PC | 443-A | 443-D
size: 520mm
option: Pinaceae | Aspen | Cedar



Wooden Ladle
Standard 68cm

code: 444-PC | 444-D | 444-D
size: 680mm
option: Pinaceae | Aspen | Cedar



Wooden Ladle
Puro 51cm

code: 459-PC | 459-D | 459-BL
size: 510mm
option: Pinaceae | Cedar | Black



Wooden Ladle
Puro 67cm

code: 460-PC | 460-D | 460-BL
size: 670mm
option: Pinaceae | Cedar | Black



Wooden Ladle
Puro 81cm

code: 461-PC | 461-D | 461-BL
size: 810mm
option: Pinaceae | Cedar | Black



Kanto Ladle

code: 451-MPC | 451-MWH | 451-MBL
size: 520mm
option: Pinaceae | White | Black



Dragon Ladle

code: 449-D | 449-BL
size: 498mm
option: Cedar | Black




Steamshot Ladle

code: 449-D-DRF | 449-BL-DRF
size: 498mm
option: Cedar | Black



Stainless Steel Ladle 40cm

code: 441-MPC | 441-MA | 441-MD
size: 400mm
option: Pinaceae | Aspen | Cedar

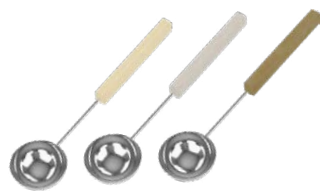

Stainless Steel Ladle Siro 46.5cm

code: 445-MPC | 445-MA | 445-MD
size: 465mm
option: Pinaceae | Aspen | Cedar



Stainless Steel Ladle Usva 40cm

code: 442-MPC | 442-MA | 442-MD
size: 400mm
option: Pinaceae | Aspen | Cedar



Stainless Steel Ladle
with Curved Handle

code: 453-MD | 453-MA
size: 460mm
option: Cedar | Aspen



Stainless Steel Ladle Siro 70.5cm

code: 446-MPC | 446-MA | 446-MD
size: 705mm
option: Pinaceae | Aspen | Cedar

Thermometers and Combined Meters



Loisto Square Thermometer
code: 108-TD
size: 110 x 85mm
option: Cedar



Loisto Rounded Thermometer
code: 109-TD
size: 110 x 85mm
option: Cedar



Kanto Thermometer
code: 104-TD | 104-TWH | 104-TBL
size: 125 x 125mm
option: Cedar | White | Black



Black Metal Thermometer
code: 295-TMBL
size: 110 x 110mm
option: Black Metal



Black Metal Thermo-Hygrometer
code: 295-THMBL
size: 220 x 110mm
option: Black Metal



Accent Stone Thermometer
code: 280-TRPC | 280-TRA | 280-TRD
size: 125 x 160mm
option: Pinaceae | Aspen | Cedar



Cut Corner Square Thermometer
code: 220-TPC | 220-TA | 220-TD
size: 140 x 140mm
option: Pinaceae | Aspen | Cedar



Square Thermometer
code: 223-TPC | 223-TA | 223-TD
size: 140 x 140mm
option: Pinaceae | Aspen | Cedar



Octagon Thermometer
code: 240-TPC | 240-TA | 240-TD
size: 165 x 180mm
option: Pinaceae | Aspen | Cedar



Water Drop Thermometer
code: 250-TPC | 250-TA | 250-TD
size: 150 x 180mm
option: Pinaceae | Aspen | Cedar



Accent Stone Thermo-Hygrometer
code: 281-THRPC | THRA | THRD
size: 160 x 185mm
option: Pinaceae | Aspen | Cedar



Accent Stone Rectangle Thermo-Hygrometer
code: 282-THRPC | THRA | THRD
size: 255 x 155mm
option: Pinaceae | Aspen | Cedar



Accent Stone Vertical Thermo-Hygrometer
code: 283-THVRPC | THVRA | THVRD
size: 155 x 255mm
option: Pinaceae | Aspen | Cedar



Water Drop Thermo-Hygrometer
code: 251-THPC | THA | THD
size: 185 x 225mm
option: Pinaceae | Aspen | Cedar



Octagon Thermo-Hygrometer
code: 241-THPC | THA | THD
size: 175 x 225mm
option: Pinaceae | Aspen | Cedar



Square Thermo-Hygrometer
code: 225-THPC | THA | THD | THBL
size: 180 x 180mm
option: Pinaceae | Aspen | Cedar | Black



Curved Square Thermo-Hygrometer
code: 285-THPC | THA | THD
size: 170 x 175mm
option: Pinaceae | Aspen | Cedar



Basic Curved Rectangle Thermo-Hygrometer
code: 271-THBPC | THBA | THBD
size: 225 x 140mm
option: Pinaceae | Aspen | Cedar



Rectangle Thermo-Hygrometer
code: 224-THPC | THA | THD
size: 255 x 140mm
option: Pinaceae | Aspen | Cedar



Curved Rectangle Thermo-Hygrometer
code: 271-THPC | THA | THD
size: 225 x 140mm
option: Pinaceae | Aspen | Cedar



Cut Corner Rectangle Thermo-Hygrometer
code: 221-THPC | 221-THA | 221-THD
size: 225 x 140mm
option: Pinaceae | Aspen | Cedar



Cut Corner Vertical Rectangle Thermo-Hygrometer
code: 221-THVPC | THVA | THVD
size: 136 x 251mm
option: Pinaceae | Aspen | Cedar



Rounded Rectangle Thermo-Hygrometer
code: 222-THPC | THA | THD
size: 225 x 140mm
option: Pinaceae | Aspen | Cedar

Clocks



Loisto Wooden
Clock Square
code: 534-D
size: 180 x 180mm
option: Cedar



Loisto Wooden
Clock Round
code: 535-D
size: Ø180mm
option: Cedar



Wooden Pail
Clock
code: 530-PC | 530-A | 530-D
size: Ø260 x 90mm
option: Pinaceae | Aspen |
Cedar



Wooden Pail
Clock Small
code: 531-PC | 531-A | 531-D
size: Ø230 x 40mm
option: Pinaceae | Aspen |
Cedar



Sandtimers



Sand Timer
15min Stone
code: 549-RA | 549-RD |
549-RBL
size: 65 x 340mm
option: Aspen | Cedar | Black



Sand Timer
15min
code: 553-A | 553-PC | 553-D |
553-BL
size: 65 x 340mm
option: Aspen | Pinaceae |
Cedar | Black



Sand Timer Kanto
15min
code: 554-A | 554-D |
554-BL
size: 65 x 340mm
option: Aspen | Cedar | Black



Sand Timer Tag
15min
code: 550-PC | 550-A |
550-D
size: 65 x 340mm
option: Pinaceae | Aspen |
Cedar



Headrests and Backrests



Wave
Wooden Backrest
code: 506-2-A | 506-2-D |
506-2-BL
size: 390 x 845mm
option: Aspen | Cedar | Black



Wave
Wooden Headrest
code: 515-A | 515-D |
515-BL
size: 190 x 480mm
option: Aspen | Cedar |
Black



Halu
Wooden Headrest
code: 512-A | 512-D
size: 180 x 230mm
option: Aspen | Cedar




Halu
Anti-theft Headrest
code: 513-A | 513-D
size: 190 x 480mm
option: Aspen | Cedar



Wooden
Backrest
code: 516-PC | 516-A | 516-D
size: 396 x 515mm
option: Pinaceae | Aspen |
Cedar



Wooden
Backrest
code: 514-A | 514-D
size: 346 x 888mm
option: Aspen | Cedar

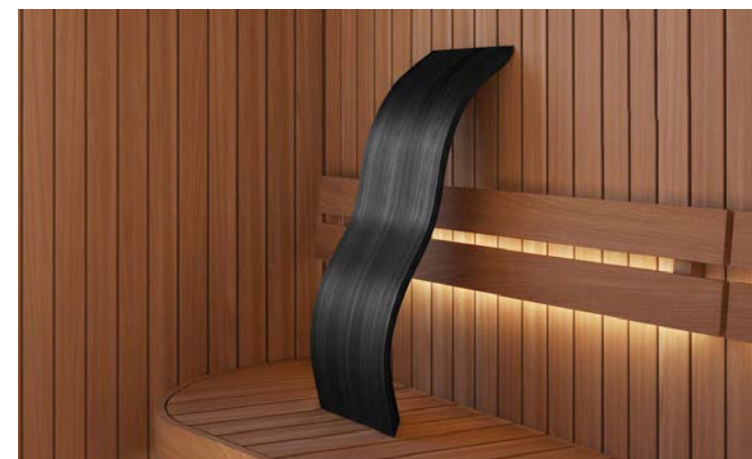



Benches



Sauna Bench
code: 520-D
size: 430 x 534 x 412mm
option: Cedar



Sauna Bench
code: 521-D
size: 430 x 870 x 412mm
option: Cedar



Sauna Bench
code: 522-D
size: 500 x 870 x 510mm
option: Cedar



Sauna Bench
code: 523-D
size: 500 x 1200 x 510mm
option: Cedar



Sauna Bench 2-Layers
code: 524-D
size: 760 x 534 x 562mm
option: Cedar



Siro Sauna Bench 42cm
code: 528-D
size: 290 x 420 x 420mm
option: Cedar



Siro Sauna Bench 85cm
code: 529-D
size: 290 x 850 x 420mm
option: Cedar



Siro Sauna Bench 120cm
code: 529-L-D
size: 290 x 1200 x 420mm
option: Cedar



Siro Wide Sauna Bench 42cm
code: 628-D
size: 440 x 420 x 420mm
option: Cedar



Siro Wide Sauna Bench 85cm
code: 629-D
size: 440 x 850 x 420mm
option: Cedar



Siro Wide Sauna Bench 120cm
code: 629-L-D
size: 440 x 1200 x 420mm
option: Cedar

Hook Racks



Wooden Cloth Hanger – 3 Holders
code: 582-PC | 582-A | 582-D
size: 42 x 240mm
option: Pinaceae | Aspen | Cedar



Wooden Cloth Hanger – 4 Holders
code: 586-PC | 586-A | 586-D
size: 42 x 340mm
option: Pinaceae | Aspen | Cedar



Wooden Cloth Hanger – 5 Holders
code: 583-PC | 583-A | 583-D
size: 42 x 440mm
option: Pinaceae | Aspen | Cedar



Wooden Floor Mat Block
code: 595-PC-BC | 595-A-BC | 595-D-BC
size: 285 x 285mm
thickness: 22mm
option: Pinaceae | Aspen | Cedar



Wooden Floor Mat Corner Frame
code: 595-PC-CNR | 595-A-CNR | 595-D-CNR
size: 390 x 115mm
thickness: 22mm
option: Pinaceae | Aspen | Cedar



Wooden Floor Mat Sides
code: 595-PC-SID | 595-A-SID | 595-D-SID
size: 285 x 115mm
thickness: 22mm
option: Pinaceae | Aspen | Cedar

Floor Mat Tiles

Sauna Lights and Light Covers



Wooden Curve Light 237
code: 923-D | 923-D-SET
size: 240 x 85 x 60mm
option: Cedar

NOTE: Set includes 2 lights



Wooden Curve Light 365
code: 924-D | 924-D-SET
size: 364 x 85 x 60mm
option: Cedar

NOTE: Set includes 2 lights



Wooden Curve Light 610
code: 925-D | 925-D-SET
size: 614 x 85 x 60mm
option: Cedar

NOTE: Set includes 2 lights



Wooden Light Cover Square
code: 910-SPC | 910-SA | 910-SD
size: 250 x 75mm
option: Pinaceae | Aspen | Cedar




Wooden Light Cover Square
code: 911-LPC | 911-LA | 911-LD
size: 250 x 135mm
option: Pinaceae | Aspen | Cedar



Wooden Light Cover Corner/Wall
code: 914-VPC | 914-VA | 914-VD
size: 150 x 110mm
option: Pinaceae | Aspen | Cedar



Wooden Light Cover Wave
code: 917-PC | 917-A | 917-D
size: 207 x 280mm
option: Pinaceae | Aspen | Cedar

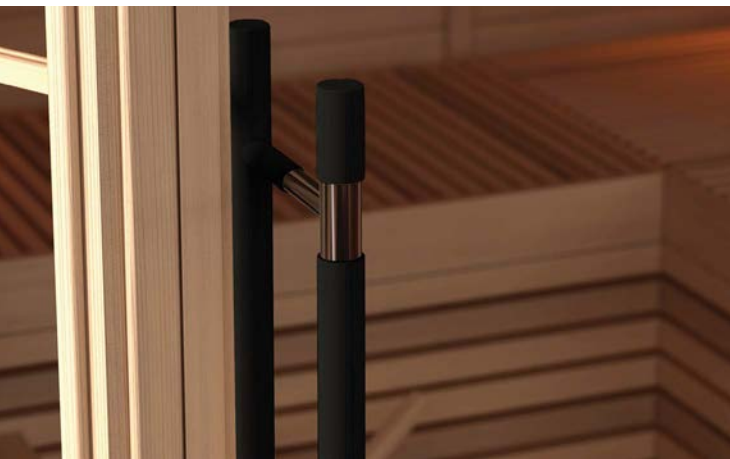

Door Handles



Wooden Arc
Door Handle

code: 558-A | 558-D | 558-BL
size: 40 x 900mm
option: Aspen | Cedar | Black



Wooden Straight
Door Handle with
metal Accent

code: 560-A | 560-D | 560-BL
size: 155 x 900mm
option: Aspen | Cedar | Black



Wooden Door
Handle Small Round

code: 565-PC | 565-A | 565-D
size: Ø65 x W70mm
option: Pinaceae | Aspen |
Cedar



Wooden Door
Handle Big Round

code: 566-PC | 566-A | 566-D
size: Ø90 x W50mm
option: Pinaceae | Aspen |
Cedar



Wooden Door Handle
with Magnetic Lock

code: 568-PC | 568-A | 568-D
size: 260 x 45mm
option: Pinaceae | Aspen |
Cedar



Door Hinge
Round

code: 571 | 571-BL
size: 90 x 70mm
option: Aluminum |
Black



Door Lock Magnet
Round, Heavy-Duty

code: 574
size: 17 x 28.5mm
option: Aluminum

Ventilation



Ventilation
Cover Circle

code: 640-D | 640-BR
size: Ø160mm
option: Cedar | Metallic
Brown



Ventilation
Louver Circle

code: 631-PC | 631-A | 631-D
size: Ø145mm
ducting hole: 100mm
option: Pinaceae | Aspen | Cedar



Ventilation
Louver Circle

code: 634-PC | 634-A | 634-D
size: Ø170mm
ducting hole: 125mm
option: Pinaceae | Aspen | Cedar



Ventilation
Louver Square

code: 620-PC | 620-A | 620-D
size: 215 x 170mm
option: Pinaceae | Aspen | Cedar



Ventilation
Louver Circle

code: 638-PC | 638-A | 638-D | 638-BL
size: Ø145mm
ducting hole: 100mm
option: Pinaceae | Aspen | Cedar | Black



Ventilation
Louver Circle

code: 639-PC | 639-A | 639-D | 639-BL
size: Ø170mm
ducting hole: 125mm
option: Pinaceae | Aspen | Cedar | Black

Display Stand Wall



Display Stand Wall 1
code: DP-15
size: (W)1110 x (D)630 x (H)2000mm



Display Stand Wall 2
code: DP-16
size: (W)2300 x (D)630 x (H)2000mm



Display Stand Wall 3
code: DP-17
size: (W)3400 x (D)630 x (H)2000mm

Add Ons



Sauna Signage
code: 950-PC | 950-A | 950-D | 950-BL
size: 150 x 80mm
option: Pinaceae | Aspen | Cedar | Black



Moisture Paper
code: SP02-900
size: 1,200mm x 77mm x 77mm



Doors



Wooden Stripe
Sauna Door

code: 770-4SD-R | 770-4SD-L
Opening size: 610 x 1935mm
Frame size: 700 x 2040mm
option: Cedar



Wooden Stripe
Sauna Door

code: 771-4SD-R | 771-4SD-L
Opening size: 915 x 2015mm
Frame size: 1005 x 2120mm
option: Cedar



Wooden Reversible Sauna Door

code: 773-4SP | 773-4SA | 773-4SD
Opening size: 915 x 2015mm
Frame size: 1005 x 2120mm
option: Pinaceae | Aspen | Cedar



Wooden Reversible Sauna Door

code: 734-4SP | 734-4SA | 734-4SD
Opening size: 610 x 1935mm
Frame size: 700 x 2040mm
option: Pinaceae | Aspen | Cedar



Wooden Door with
Clear Glass Window

code: 743-4SCP-R | L / 743-4SCA-R | L /
743-4SCD-R | L
Opening size: 600 x 1800mm
Frame size: 690 x 1890mm
option: Pinaceae | Aspen | Cedar



Wooden Door with
Bronze Glass Window

code: 743-4SGP-R | L / 743-4SGA-R | L /
743-4SGD-R | L
Opening size: 600 x 1800mm
Frame size: 690 x 1890mm
option: Pinaceae | Aspen | Cedar



Wooden Sauna Door with Window

code: 736-4SGP-R | L / 736-4SGA-R | L /
736-4SGD-R | L
Opening size: 915 x 2015mm
Frame size: 1005 x 2120mm
option: Pinaceae | Aspen | Cedar



Wooden Wide Clear Window
Sauna Door

code: 739-3SCP-R | L / 739-3SCA-R | L /
739-3SCD-R | L
Frame size: 124 x 1003 x 2075mm
option: Pinaceae | Aspen | Cedar



Wooden Wide Bronze Window
Sauna Door

code: 739-3SGP-R | L / 739-3SGA-R | L /
739-3SGD-R | L
Frame size: 124 x 1005 x 2075mm
option: Pinaceae | Aspen | Cedar



Clear Glass Reversible Sauna Door

code: 730-4SCP | 730-4SCA | 730-4SCD
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar



Clear Glass Reversible Sauna Door

code: 731-4SCP | 731-4SCA | 731-4SCD
 Opening size: 700 x 1800mm
 Frame size: 790 x 1890mm
 option: Pinaceae | Aspen | Cedar

Clear Glass Reversible Sauna Door
with Vertical Wooden Handle Arc

code: 741-4SCD-1 | 741-4SCA-1
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Aspen | Cedar

Clear Glass Reversible Sauna Door
with Vertical Wooden Handle Metal

code: 741-4SCA-3 | 741-4SCD-3
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Aspen | Cedar

Bronze Glass Reversible Sauna Door
with Arc Handle

code: 741-4SGD-1 | 741-4SGA-1 | 741-4SGP-1
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar

Bronze Glass Reversible Sauna Door
with Metallic Handle

code: 741-4SGD-3 | 741-4SGA-3 | 741-4SGP-3
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar

Bronze Glass Reversible
Sauna Door Standard

code: 730-4SGD | 730-4SGA | 730-4SGP
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar

Bronze Glass Reversible
Sauna Door Standard

code: 731-4SGD | 731-4SGA | 731-4SGP
 Opening size: 700 x 1800mm
 Frame size: 790 x 1890mm
 option: Pinaceae | Aspen | Cedar

Left-handed Bronze Glass Sauna Door
Finland with Arc Handle

code: 741-3SGD-L-1 | 741-3SGA-L-1 | 741-3SGP-L-1
 Glass size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar

Left-handed Bronze Glass Sauna Door
Finland with Metallic Handle

code: 741-3SGD-L-3 | 741-3SGA-L-3 | 741-3SGP-L-3
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar

Left-handed Bronze Glass
Sauna Door Finland

code: 730-3SGD-L | 730-3SGA-L | 730-3SGP-L
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar

Left-handed Bronze Glass
Sauna Door Finland

code: 731-3SGD-L | 731-3SGA-L | 731-3SGP-L
 Opening size: 700 x 1800mm
 Frame size: 790 x 1890mm
 option: Pinaceae | Aspen | Cedar

Right-handed Bronze Glass Sauna Door
Finland with Arc Handle

code: 741-3SGD-R-1 | 741-3SGA-R-1 | 741-3SGP-R-1
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar

Right-handed Bronze Glass Sauna Door
Finland with Metallic Handle

code: 741-3SGD-R-3 | 741-3SGA-R-3 | 741-3SGP-R-3
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar

Right-handed Bronze Glass
Sauna Door Finland

code: 730-3SGD-R | 730-3SGA-R | 730-3SGP-R
 Opening size: 600 x 1800mm
 Frame size: 690 x 1890mm
 option: Pinaceae | Aspen | Cedar

Right-handed Bronze Glass
Sauna Door Finland

code: 731-3SGD-R | 731-3SGA-R | 731-3SGP-R
 Opening size: 700 x 1800mm
 Frame size: 790 x 1890mm
 option: Pinaceae | Aspen | Cedar

KIVISTONE®

Kivistone is a collection of beautiful accessories carved from Finnish soapstone. Each of these items are uniquely designed for house interiors, household use and for personal or corporate gifts. Find the vast selection of interesting concepts and designs made of soapstone.

- » Coolers and cooler sets
- » Aroma cups and scent basins
- » Miscellaneous items

! Check sawo.com for more accessories



Luxury Aroma Cup (ø)50
code: R-160
size: 50 x 50 x 50mm
weight: 0,2kg



Aroma Cup (ø)50
code: R-100
size: 50 x 50 x 60mm
weight: 0,3kg



Aroma Spirit Cup
code: R-501
size: 75 x 75 x 120mm
weight: 0,7kg



Scent Warmer
code: R-123
size: 75 x 75 x 80mm
weight: 0,7kg



Wine Cooler Stone
code: R-93-D
size: 230 x 155 x 84mm
material: Soapstone/Cedar



Spa Stones Set
code: R-500-D
size: 90 x 128 x 178mm
material: Soapstone/Cedar



Cooler (1 hole)
code: R-141
size: 100 x 100 x 75mm
weight: 1,3kg





STEAM Sauna


Our steam generators and controls offer the most soothing experience for unwinding.



STN-S Steam Generator

Built for power and performance, the **STN-S** steam generator features more flexible installation options. It has a separate electronics compartment, meaning that the generator can be installed in a different location than the electronics. Its cassette-style heating elements simplify cleaning and maintenance of the tank, while aroma, fan, and dimmer controls let you customize every steam session.

Extra steam is just a button away with the demand button feature that can be installed inside or outside of the steam room. Error codes appear on the control for quick troubleshooting. Up to five units can be linked for a maximum of 75,0kW output, all managed from a single SAWO control.



2 Heating Elements

- » Power range: 3,0 – 5,0kW
- » Steam output: up to 6,7kg/hr
- » Piping and electrical cables can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface

3 Heating Elements

- » Power range: 4,5 – 7,5kW
- » Steam output: up to 7,5kg/hr
- » Piping and electrical cables can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface

6 Heating Elements

- » Power range: 9,0 – 15,0kW
- » Steam output: up to 20kg/hr
- » Piping and electrical cables can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » 2 Steam heads included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface

2 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF STEAM GENERATOR			WEIGHT (kg)	CONTROL
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT		
STN-S-30-1/2	3,0		3	185	485	560	17	Stainless Touch STN-S 2.0
STN-S-35-1/2	3,5		3,5	185	485	560	17	Stainless Touch STN-S 2.0
STN-S-40-1/2	4,0		4	185	485	560	17	Stainless Touch STN-S 2.0
STN-S-45-1/2	4,5	2	5	185	485	560	17	Stainless Touch STN-S 2.0
STN-S-50-1/2	5,0	2	6	185	485	560	17	Stainless Touch STN-S 2.0

3 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF STEAM GENERATOR			WEIGHT (kg)	CONTROL
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT		
STN-S-45-3	4,5	2	5	220	485	560	19	Stainless Touch STN-S 2.0
STN-S-60-3	6,0	3	10	220	485	560	19	Stainless Touch STN-S 2.0
STN-S-60-C1/3	6,0	3	10	220	485	560	19	Stainless Touch STN-S 2.0
STN-S-75-3	7,5	4	15	220	485	560	19	Stainless Touch STN-S 2.0
STN-S-75-C1/3	7,5	4	15	220	485	560	19	Stainless Touch STN-S 2.0

6 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF STEAM GENERATOR			WEIGHT (kg)	CONTROL
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT		
STN-S-90-3	9,0	8	20	310	485	560	23	Stainless Touch STN-W 2.0
STN-S-90-C1/3	9,0	8	20	310	485	560	23	Stainless Touch STN-W 2.0
STN-S-120-3	12,0	15	28	310	485	560	23	Stainless Touch STN-W 2.0
STN-S-150-3	15,0	22	40	310	485	560	23	Stainless Touch STN-W 2.0

STN-W Steam Generator

A heavy-duty performer built for commercial use, the **STN-W** steam generator features a cassette for heating elements that makes cleaning or replacement quick and simple. The generator's aroma, fan, and dimmer controls allow users to fully customize the sauna experience, while an optional demand button delivers an extra burst of steam on command.

Maintenance and installation are straightforward: error codes are shown on the controller screen, and a removable side window provides easy access to the settings board. The steam outlet can be installed left or right, with the autodrain positioned on the side or bottom. Up to five units can be linked together for a maximum 75,0kW output, all controlled using a single SAWO interface.

! For more technical information, see page 94.



2 Heating Elements

- » Power range: 3,0 – 5,0kW
- » Steam output: up to 6,7kg/hr
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface



3 Heating Elements

- » Power range: 4,5 – 7,5kW
- » Steam output: up to 7,5kg/hr
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface



6 Heating Elements


- » Power range: 9,0 – 15,0kW
- » Steam output: up to 20kg/hr
- » Own pipe for overpressure valve
- » Auto drain
- » 2 Steam heads included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface

STN Steam Generator

Built for the demands of commercial use, the **STN** steam generator combines durability and performance. Its solid stainless-steel construction minimizes corrosion, while a range of optional features, including aroma, fan, and dimmer controls, allow for a personalized steam experience. An optional demand button releases extra steam for 30 seconds when needed.

Troubleshooting is effortless, with error codes displayed directly on the controller screen. The system can be installed in either left or right orientation and linked in series with up to five units for a maximum output of 75,0kW, all controlled through a single SAWO interface.

⚠ For more technical information, see page 94.

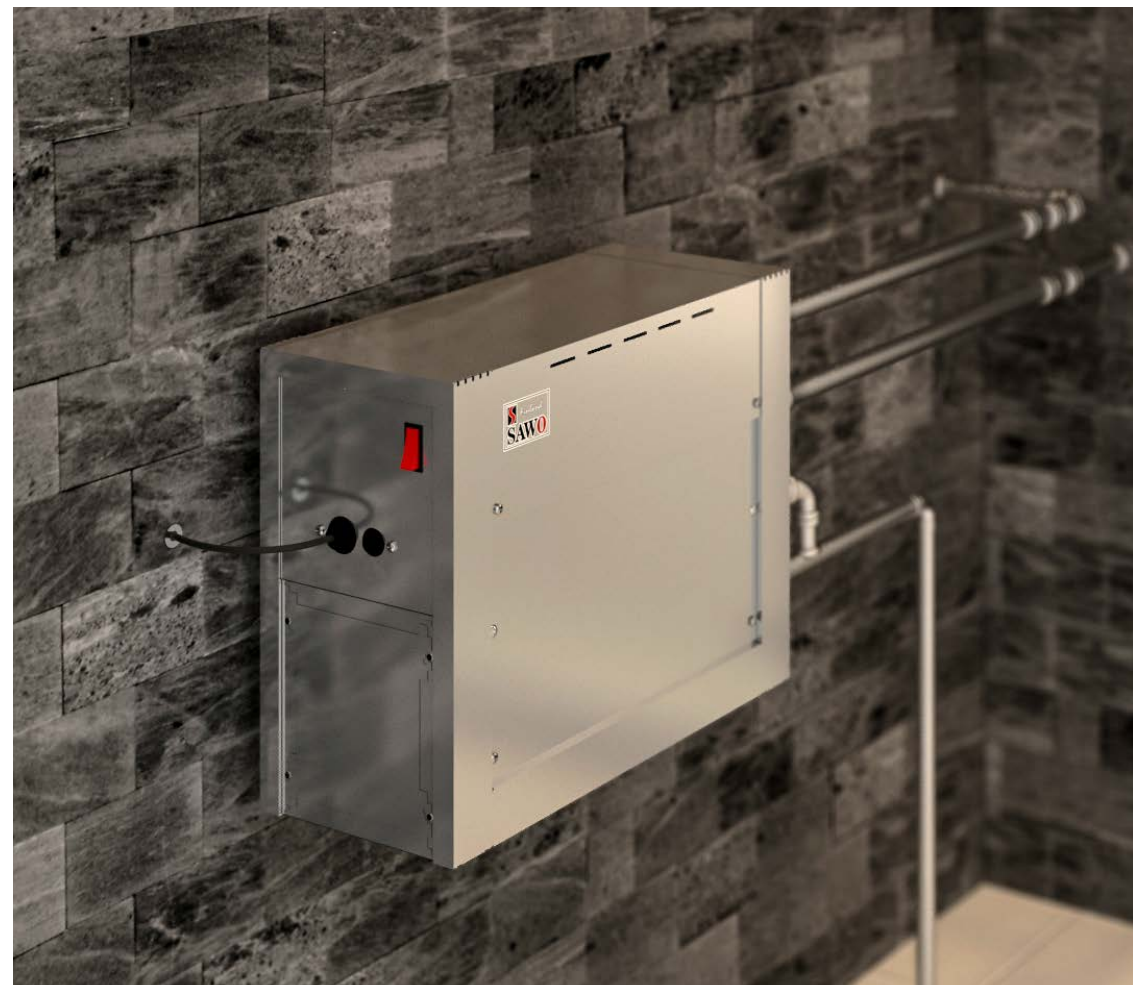

2 Heating Elements

- » Power range: 3,0 – 5,0kW
- » Steam output: up to 6,7kg/hr
- » Can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » 3/4" steam pipe
- » Available controls: STP Classic, STP Classic 2.0 and STP Stainless Steel Touch



3 Heating Elements


- » Power range: 4,5 – 7,5kW
- » Steam output: up to 7,5kg/hr
- » Can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » 3/4" steam pipe
- » Available controls: STP Classic, STP Classic 2.0 and STP Stainless Steel Touch



6 Heating Elements

- » Power range: 9,0 – 15,0kW
- » Steam output: up to 20kg/hr
- » Can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » 2 Steam heads included
- » Cassette type heating element setup for easy maintenance
- » 3/4" steam pipe
- » Available controls: STP Classic, STP Classic 2.0 and STP Stainless Steel Touch

Technical DATA



STN-W Steam Generator

2 Heating Elements


STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF STEAM GENERATOR			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
		(m³)		(mm)				
STN-W-30-1/2	3,0		3	245	485	560	17	Stainless Touch STN-W 2.0
STN-W-35-1/2	3,5		3,5	245	485	560	17	Stainless Touch STN-W 2.0
STN-W-40-1/2	4,0		4	245	485	560	17	Stainless Touch STN-W 2.0
STN-W-45-1/2	4,5	2	5	245	485	560	17	Stainless Touch STN-W 2.0
STN-W-50-1/2	5,0	2	6	245	485	560	17	Stainless Touch STN-W 2.0

3 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF STEAM GENERATOR			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
		(m³)		(mm)				
STN-W-45-3	4,5	2	5	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-45-C1/3	4,5	2	5	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-60-3	6,0	3	10	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-60-C1/3	6,0	3	10	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-75-3	7,5	4	15	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-75-C1/3	7,5	4	15	280	485	560	19	Stainless Touch STN-W 2.0

6 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF STEAM GENERATOR			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
		(m³)		(mm)				
STN-W-90-3	9,0	8	20	375	485	560	23	Stainless Touch STN-W 2.0
STN-W-90-C1/3	9,0	8	20	375	485	560	23	Stainless Touch STN-W 2.0
STN-W-120-3	12,0	15	28	375	485	560	23	Stainless Touch STN-W 2.0
STN-W-150-3	15,0	22	40	375	485	560	23	Stainless Touch STN-W 2.0



STN Steam Generator

2 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
		(m³)		(mm)				
STN-30-1/2	3,0		3	185	485	560	17	Touch Classic Classic 2.0
STN-35-1/2	3,5		3,5	185	485	560	17	Touch Classic Classic 2.0
STN-40-1/2	4,0		4	185	485	560	17	Touch Classic Classic 2.0
STN-45-1/2	4,5	2	5	185	485	560	17	Touch Classic Classic 2.0
STN-50-1/2	5,0	2	6	185	485	560	17	Touch Classic Classic 2.0

3 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
		(m³)		(mm)				
STN-45-3	4,5	2	5	220	485	560	19	Touch Classic Classic 2.0
STN-45-C1/3	4,5	2	5	220	485	560	19	Touch Classic Classic 2.0
STN-60-3	6,0	3	10	220	485	560	19	Touch Classic Classic 2.0
STN-60-C1/3	6,0	3	10	220	485	560	19	Touch Classic Classic 2.0
STN-75-3	7,5	4	15	220	485	560	19	Touch Classic Classic 2.0
STN-75-C1/3	7,5	4	15	220	485	560	19	Touch Classic Classic 2.0

6 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
		(m³)		(mm)				
STN-90-3	9,0	8	20	310	485	560	23	Touch Classic Classic 2.0
STN-90-C1/3	9,0	8	20	310	485	560	23	Touch Classic Classic 2.0
STN-120-3	12,0	15	28	310	485	560	23	Touch Classic Classic 2.0
STN-150-3	15,0	22	40	310	485	560	23	Touch Classic Classic 2.0

INCLUDED IN THE PACKAGE



Electronics Compartment
(Included for STN-S models only)



Autodrain
(Included for STN-S, STN-W, and STN models)



Aroma, Fan and Dimmer Functions
(Optional features for STN models)



Temperature sensor with wire and sensor holder



Steam Head
(for 9kW models and up, two heads are included)



7,5m RJ12 Cable
7,5m RJ10 Cable

STE Steam Generator

Reliable and effortless to use, the **STE** steam generator is designed for residential environments. It is also simple to operate; just switch on the control and adjust the temperature knob. The stainless-steel construction ensures long-lasting durability and resistance to corrosion.

The STE can be oriented for connections on either side for easy installation in any layout. For greater power capacity, up to five units can be linked in series to deliver a maximum output of 75,0kW, all managed from a single SAWO control.

! For more technical information, see page 97.



2 Heating Elements

- » Power range: 3,0 - 5,0kW
- » Steam output: up to 6,7kg/hr
- » Can be installed in either side
- » Own pipe for overpressure valve
- » Steam head included
- » Available controls: STE 2.0



3 Heating Elements


- » Power range: 4,5 - 7,5kW
- » Steam output: up to 7,5kg/hr
- » Can be installed in either side
- » Own pipe for overpressure valve
- » Steam head included
- » Available controls: STE 2.0



6 Heating Elements

- » Power range: 9,0 - 15,0kW
- » Steam output: up to 20kg/hr
- » Can be installed in either side
- » Own pipe for overpressure valve
- » 2 Steam heads included
- » Available controls: STE 2.0

Technical DATA



STE Steam Generator

2 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT (mm)		
STE-30-1/2	3,0		3	205	465	555	16,5	STE Basic Advance
STE-35-1/2	3,5		3,5	205	465	555	16,5	STE Basic Advance
STE-40-1/2	4,0		4	205	465	555	16,5	STE Basic Advance
STE-45-1/2	4,5	2	5	205	465	555	16,5	STE Basic Advance
STE-50-1/2	5,0	2	6	205	465	555	16,5	STE Basic Advance

3 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT (mm)		
STE-45-C1/3	4,5	2	5	250	370	555	18	STE Basic Advance
STE-60-C1/3	6,0	3	10	250	370	555	18	STE Basic Advance
STE-75-C1/3	7,5	4	15	250	370	555	18	STE Basic Advance

6 Heating Elements

STEAM GENERATOR MODEL	kW	STEAM ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT (mm)		
STE-90-C1/3	9,0	8	20	335	465	555	23	STE Basic Advance
STE-120-3	12,0	15	28	335	465	555	23	STE Basic Advance
STE-150-3	15,0	22	40	335	465	555	23	STE Basic Advance

INCLUDED IN THE PACKAGE



Temperature sensor with wire and sensor holder



Steam Head
(for 9kW models and up,
two heads are included)



7,5m RJ12 Cable
7,5m RJ10 Cable

Steam Generator Series Connection




Classic 2.0



Stainless Steel
Touch

Steam Generator
Control

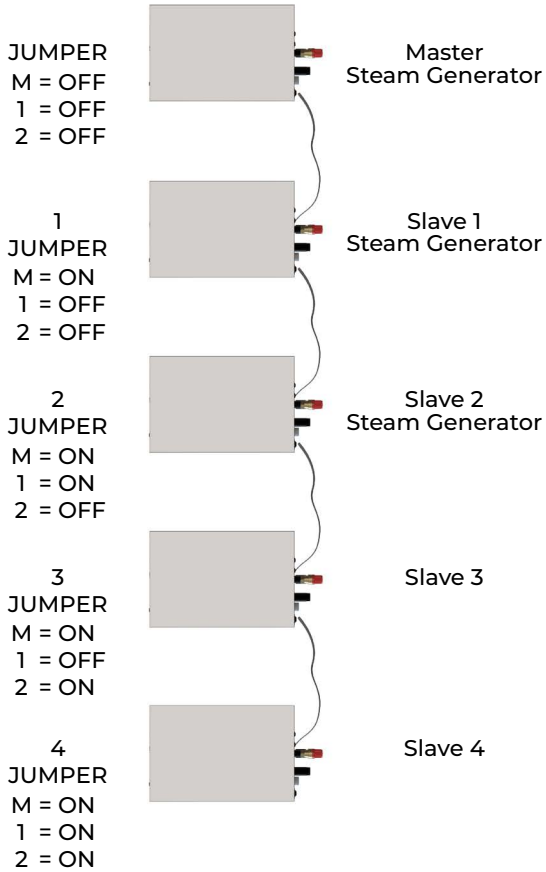

Steam Generator Controls




Steam 2.0 (STP-INFACE-V2)

- » Thick stainless steel casing
- » LED digital display
- » Scent pump, light dimmer and fan
- » 7,5 meters RJ12 cable with connectors included



Steam Stainless Steel Touch (STP-INFACE-SST)

- » Thick stainless steel casing
- » Animated buttons
- » Compatible for automated household component
- » Emergency alarm provision
- » Standby mode to keep water warm until next session
- » Displays error code
- » Autodrain function
- » Key lock
- » Easy mode available
- » Date and time setup
- » Kilowatt usage counter
- » Decalcifying function
- » Heating Element fail detect
- » Blackout memory
- » Celsius or Fahrenheit temperature unit
- » Autolight
- » Autofan
- » LCD contrast adjustment
- » Scent pump, light dimmer and fan
- » Temperature sensor with wire
- » Optional interface holder
- » 7,5 meters RJ12 cable with connectors included



Steam STE (STE-INFACE-V2)

- » Thick stainless steel casing
- » LED digital display
- » 7,5 meters RJ12 cable with connectors included

OPTIONAL ITEMS



Aroma Pump
code: STP-PUMP




Demand Button
code: STP-BTN-2.0



Steam Door
code: ST-746-L | R | I
size: 790 x 1890mm



Steam Door
code: ST-749-L | R | I
size: 900 x 2100mm

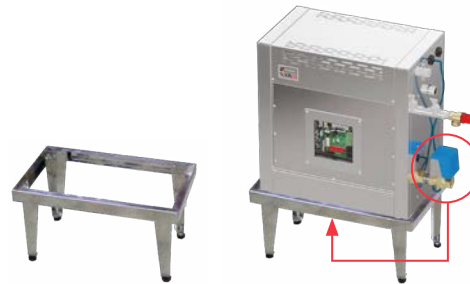

Installation Stand for STN-W
code: STW-STAND

- » For easier installation of STN-W steam generator

VENTURI PIPES



Venturi Pipe L-shape
code: ST-LPIPE



Venturi Pipe Straight
code: ST-PIPE

Venturi Pipe

- » Generate milder and softer steam
- » Create more steam clouds
- » Prevents hissing noise
- » Including steam head to spread the steam outburst
- » Thick stainless steel metal





sawo.com

 [SAWO Sauna](#)

 [SAWOsauna](#)

 [SAWO Inc.](#)

 [SAWOSauna](#)

 [SAWOSauna](#)