



STONE

SERIES



SAuna WORLD



sawo.com



SAWO Sauna



Sawo Inc.




Nimbus

The striking **Nimbus** heater features a soapstone casing that provides long-lasting heat. The Nimbus is compatible with Saunova and Innova controls (NS).

- » Power range: 9,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)



Technical Data

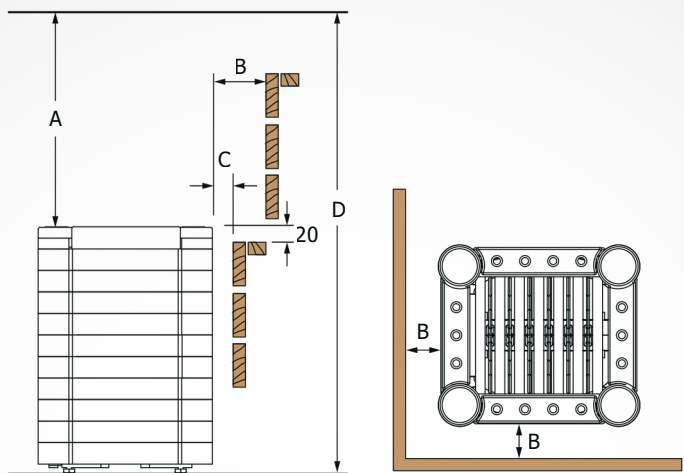

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN (m³)	MAX (m³)	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)				A	B	C	D
NIM-90NS-P	9,0	8	14	470	520	690	40-50	80	separate	1200	110	50	1900
NIM-105NS-P	10,5	9	15	470	520	690	40-50	80	separate	1200	120	60	1900
NIM-120NS-P	12,0	10	18	470	520	690	40-50	80	separate	1400	130	70	2100
NIM-150NS-P	15,0	13	23	470	660	690	60-75	100	separate	1400	160	100	2100
NIM-180NS-P	18,0	17	29	470	660	690	60-75	100	separate	1400	160	100	2100
NIM-180NS-V12-P	18,0	18	30	470	820	690	80-100	120	separate	1400	160	100	2100
NIM-210NS-V12-P	21,0	22	35	470	820	690	80-100	120	separate	1400	160	100	2100
NIM-240NS-V12-P	24,0	26	42	470	820	690	80-100	120	separate	1400	160	100	2100




Nimbus Combi

Nimbus Combi ramps up the steam with its water tank for a perfect balance of heat and humidity. The heater is compatible with Saunova and Innova controls (NS).

- » Power range: 9,0 – 18,0kW
- » Available controls: Saunova/Innova (NS)
- » Built-in aroma cups
- » Optional: auto-refill feature for automatically refilling the water tank



Technical Data

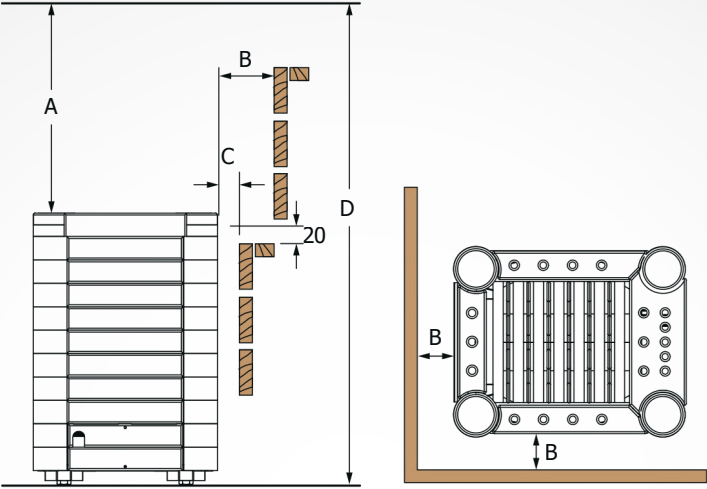

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN (m³)	MAX	LENGTH	WIDTH	HEIGHT				A	B	C	D
NIMC-90NS-P	9,0	1 x 2,0	8	14	575	470	690	40-50	90	separate	1200	50	30	1900
NIMC-105NS-P	10,5	1 x 2,0	9	15	575	470	690	40-50	90	separate	1200	50	30	1900
NIMC-120NS-P	12,0	1 x 2,0	10	18	575	470	690	40-50	90	separate	1400	130	70	2100
NIMC-150NS-P	15,0	2 x 2,0	13	23	775	470	690	60-75	120	separate	1400	160	100	2100
NIMC-180NS-P	18,0	2 x 2,0	17	29	775	470	690	60-75	120	separate	1400	160	100	2100



Cumulus

Cumulus is an elegant wall-mounted with decorative Finnish soapstone front. Add aromatherapy to the sauna by using the aroma cups provided in the top of the heater.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Built-in aroma cups



Cumulus
(Ni2)




Cumulus
(NS)



Cumulus
(NB)



Technical Data

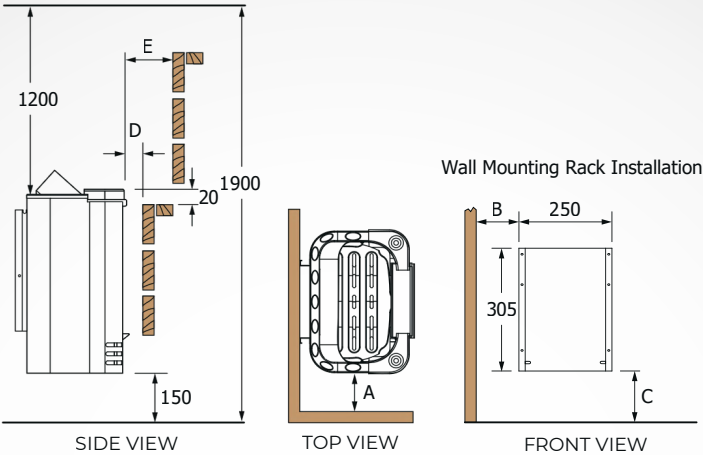

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT				A	B	C	D	E
CML-45Ni2-P-C	4,5	3	6	*300	420	500	18	22	Saunova	50	130	245	20	50
CML-60Ni2-P-C	6,0	5	9	*300	420	500	18	22	Saunova	50	130	245	20	50
CML-80Ni2-P-C	8,0	7	13	*300	420	590	22	22	Saunova	60	140	330	30	60
CML-90Ni2-P-C	9,0	8	14	*300	420	590	22	22	Saunova	60	140	330	30	60

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT				A	B	C	D	E
CML-45NS-P-C	4,5	3	6	*300	420	500	18	22	separate	50	130	245	20	50
CML-60NS-P-C	6,0	5	9	*300	420	500	18	22	separate	50	130	245	20	50
CML-80NS-P-C	8,0	7	13	*300	420	590	22	22	separate	60	140	330	30	60
CML-90NS-P-C	9,0	8	14	*300	420	590	22	22	separate	60	140	330	30	60

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONES	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT				A	B	C	D	E
CML-45NB-P-C	4,5	3	6	*300	420	500	18	22	built-in (8+4h)	50	130	245	20	50
CML-60NB-P-C	6,0	5	9	*300	420	500	18	22	built-in (8+4h)	50	130	245	20	50
CML-80NB-P-C	8,0	7	13	*300	420	590	22	22	built-in (8+4h)	60	140	330	30	60
CML-90NB-P-C	9,0	8	14	*300	420	590	22	22	built-in (8+4h)	60	140	330	30	60



SAuna WORLD



sawo.com



SAWO Sauna



Sawo Inc.