



TOWER

SERIES



SAuna World



sawo.com



SAWO Sauna



Sawo Inc.



SAWO 30 Round

SAWO30 Round is a magnificent-looking heater that can be placed perfectly in the middle of the sauna or embedded into benches.

The large amount of stones in the tall sleek body creates a rich, steam-infused atmosphere with an ideal combination of steam and humidity.

- » Power range: 4,5 – 24,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS) and Built-in (NB)
- » Casing: stainless steel or black steel
- » Easier loading of stones with separating middle part
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integrated collar



Stainless Series
NB, NS, Ni2




Black Stainless Series
NB, NS, Ni2

Technical Data



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NI2-P-C SW3-45NI2-BL-P-C	4,5	3	6	245	245	1305	70	60	Saunova	100	1900
SW3-60NI2-P-C SW3-60NI2-BL-P-C	6,0	5	8	245	245	1305	70	60	Saunova	100	1900
SW3-90NI2-P-C SW3-90NI2-BL-P-C	9,0	8	15	345	345	1305	160	100	Saunova	100	1900



Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NS-P-C SW3-45NS-BL-P-C	4,5	3	6	245	245	1305	70	60	separate	100	1900
SW3-60NS-P-C SW3-60NS-BL-P-C	6,0	5	8	245	245	1305	70	60	separate	100	1900
SW3-90NS-P-C SW3-90NS-BL-P-C	9,0	8	15	345	345	1305	160	100	separate	100	1900
SW3-120NS-P-C SW3-120NS-BL-P-C	12,0	11	18	345	345	1305	160	100	separate	100	2100
SW3-180NS-P-C SW3-180NS-BL-P-C	18,0	18	30	515	515	1305	360	220	separate	100	2300
SW3-210NS-P-C SW3-210NS-BL-P-C	21,0	22	35	515	515	1305	360	220	separate	100	2300
SW3-240NS-P-C SW3-240NS-BL-P-C	24,0	24	40	515	515	1305	360	220	separate	100	2300



Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NB-P-C SW3-45NB-BL-P-C	4,5	3	6	245	245	1305	70	60	built-in (8+4h)	100	1900
SW3-60NB-P-C SW3-60NB-BL-P-C	6,0	5	8	245	245	1305	70	60	built-in (8+4h)	100	1900
SW3-90NB-P-C SW3-90NB-BL-P-C	9,0	8	15	345	345	1305	160	100	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Round

Heater Guards for Round



Stainless



Wooden



Soapstone



Wooden

Cedar (D) and Aspen (A)

Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S12	160	460	45
TH-COLLAR-S14	140	540	45
TH-COLLAR-S16	140	640	45
TH-COLLAR-S18	140	720	45
TH-COLLAR-S12	120	820	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W2-D A	440	440	45
TH-COLLAR-W4-D A	485	485	45
TH-COLLAR-W6-D A	540	540	45
TH-COLLAR-W8-D A	560	560	45
TH-COLLAR-W12-D A	685	685	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S2	510	510	45
TH-COLLAR-S4	560	560	45
TH-COLLAR-S6	620	620	45
TH-COLLAR-S8	690	690	45
TH-COLLAR-S12	790	790	45

MODEL	SIZE OF GUARD RAIL			HEATERS
	LENGTH	WIDTH	HEIGHT	
SW-GUARD-W2-D A	510	510	90	SW3
SW-GUARD-W6-D A	520	620	90	SW6
SW-GUARD-W12-D A	790	790	90	SW12



SAWO30

Wall

SAWO30 Wall is perfect for saving space while being very easy on the eyes.

The large amount of stones in the tall sleek body enables rich, steam-infused atmosphere with an ideal combination of steam and humidity.

- » Power range: 4,5 – 24,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS) and Built-in (NB)
- » Casing: stainless steel or black steel
- » Easier loading of stones with separating middle part
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integrated collar



Stainless Series
NB, NS, Ni2



Black Stainless Series
NB, NS, Ni2

Technical Data




SAWO30 Wall
(Ni2)

SAWO30 Wall Black
(Ni2)



SAWO30 Wall
(NS)


SAWO30 Wall Black
(NS)



SAWO30 Wall
(NB)



SAWO30 Wall Black
(NB)



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45N2-WL-P-C I SW3-45N2-WL-BL-P-C	4,5	3	6	*230	385	1395	70	60	Saunova	100	1900
SW3-60N2-WL-P-C I SW3-60N2-WL-BL-P-C	6,0	5	8	*230	385	1395	70	60	Saunova	100	1900
SW3-90N2-WL-P-C I SW3-90N2-WL-BL-P-C	9,0	8	15	*250	475	1395	160	100	Saunova	100	1900

Saunova/Innova(NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NS-WL-P-C I SW3-45NS-WL-BL-P-C	4,5	3	6	*210	390	1375	70	60	separate	100	1900
SW3-60NS-WL-P-C I SW3-60NS-WL-BL-P-C	6,0	5	8	*210	390	1375	70	60	separate	100	1900
SW3-90NS-WL-P-C I SW3-90NS-WL-BL-P-C	9,0	8	15	*290	540	1375	160	100	separate	100	1900
SW3-120NS-WL-P-C I SW3-120NS-WL-BL-P-C	12,0	11	18	*290	540	1375	160	100	separate	100	2100
SW3-180NS-WL-P-C I SW3-180NS-WL-BL-P-C	18,0	18	30	*430	780	1375	250	165	separate	100	2300
SW3-210NS-WL-P-C I SW3-210NS-WL-BL-P-C	21,0	22	35	*430	780	1375	250	165	separate	100	2300
SW3-240NS-WL-P-C I SW3-240NS-WL-BL-P-C	24,0	24	40	*430	780	1375	250	165	separate	100	2300

*Depth when installed to the wall.

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NB-WL-P-C I SW3-45NB-WL-BL-P-C	4,5	3	6	*230	385	1395	70	60	built-in (8+4h)	100	1900
SW3-60NB-WL-P-C I SW3-60NB-WL-BL-P-C	6,0	5	8	*230	385	1395	70	60	built-in (8+4h)	100	1900
SW3-90NB-WL-P-C I SW3-90NB-WL-BL-P-C	9,0	8	15	*250	475	1395	160	100	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Wall



Stainless



Wooden
Cedar (D) and Aspen (A)



Soapstone



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST2-WL	355	650	45
TH-COLLAR-ST4-WL	380	750	45
TH-COLLAR-ST6-WL	445	830	45
TH-COLLAR-ST8-WL	470	880	45
TH-COLLAR-ST12-WL	535	1010	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W2-WL-D I A	345	630	45
TH-COLLAR-W4-WL-D I A	385	725	45
TH-COLLAR-W6-WL-D I A	425	790	45
TH-COLLAR-W8-WL-D I A	480	890	45
TH-COLLAR-W12-WL-D I A	545	1030	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S2-WL	345	635	45
TH-COLLAR-S4-WL	390	720	45
TH-COLLAR-S6-WL	425	795	45
TH-COLLAR-S8-WL	475	895	45
TH-COLLAR-S12-WL	545	1035	45

Heater Guards for Wall



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL			HEATERS
	LENGTH	WIDTH	HEIGHT	
SW-GUARD-W2-WL-D I A	335	615	30	SW3
SW-GUARD-W6-WL-D I A	410	795	30	SW6



SAWO30

Corner

SAWO30 Corner is designed for making the most out of limited sauna space without having to compromise. The large amount of stones in the tall sleek body creates a rich, steam-infused atmosphere with an ideal combination of steam and humidity.

- » Power range: 4,5 – 12,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS) and Built-in (NB)
- » Casing: stainless steel or black steel
- » Easier loading of stones with separating middle part
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integrated collar



Stainless Series
NB, NS, Ni2



Black Stainless Series
NB, NS, Ni2

Technical Data




SAWO30 Corner (Ni2) SAWO30 Corner Black (Ni2)



SAWO30 Corner (NS) SAWO30 Corner Black (NS)



SAWO30 Corner (NB) SAWO30 Corner Black (NB)



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45Ni2-CNR-P-C SW3-45Ni2-CNR-BL-P-C	4,5	3	6	*300	300	1380	70	45	Saunova	100	1900
SW3-60Ni2-CNR-P-C SW3-60Ni2-CNR-BL-P-C	6,0	5	8	*300	300	1380	70	45	Saunova	100	1900
SW3-90Ni2-CNR-P-C SW3-90Ni2-CNR-BL-P-C	9,0	8	15	*415	415	1380	150	80	Saunova	100	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NS-CNR-P-C SW3-45NS-CNR-BL-P-C	4,5	3	6	*300	300	1380	70	45	separate	100	1900
SW3-60NS-CNR-P-C SW3-60NS-CNR-BL-P-C	6,0	5	8	*300	300	1380	70	45	separate	100	1900
SW3-90NS-CNR-P-C SW3-90NS-CNR-BL-P-C	9,0	8	15	*415	415	1380	105	80	separate	100	1900
SW3-120NS-CNR-P SW3-120NS-CNR-BL-P	12,0	11	18	*415	415	1380	105	80	separate	100	2100

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NB-CNR-P-C SW3-45NB-CNR-BL-P-C	4,5	3	6	*300	300	1380	70	45	built-in (8+4h)	100	1900
SW3-60NB-CNR-P-C SW3-60NB-CNR-BL-P-C	6,0	5	8	*300	300	1380	70	45	built-in (8+4h)	100	1900
SW3-90NB-CNR-P-C SW3-90NB-CNR-BL-P-C	9,0	8	15	*415	415	1380	105	80	built-in (8+4h)	100	1900

*Depth when installed to the wall.

Heater Accessories (Optional)

Integration Collars for Corner



Stainless steel



Wooden
Cedar (D) and Aspen (A)



Soapstone

MODEL	SIZE OF COLLAR	
	LENGTH	HEIGHT
TH-COLLAR-ST-CNR	220	45
TH-COLLAR-W4-CNR-D A	235	730 45
TH-COLLAR-ST6-CNR	245	795 45

MODEL	SIZE OF COLLAR	
	LENGTH	HEIGHT
TH-COLLAR-W2-CNR-D A	200	580 45
TH-COLLAR-W4-CNR-D A	215	570 45
TH-COLLAR-W6-CNR-D A	235	755 45

MODEL	SIZE OF COLLAR	
	LENGTH	HEIGHT
TH-COLLAR-S2-CNR	425	425 45
TH-COLLAR-S4-CNR	475	475 45
TH-COLLAR-S6-CNR	525	535 45

Heater Guards for Corner



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		HEATERS
	LENGTH	HEIGHT	
SW-GUARD-W2-CNR-D A	210	580 90	SW3 SW6
SW-GUARD-W6-CNR-D A	245	755 90	



TOWER

Round

Tower Round is a timelessly elegant heater that releases long-lasting mild, steady, and humid heat.


The Round model can be placed perfectly in the middle of the sauna or embedded into benches

- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova (Ni2), Innova (Ni), Saunova/Innova (NS) and Built-in (NB)
- » Casing: Stainless steel
- » Moving steel rings for replacement of broken stones
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series
NB, NS, Ni2, Ni

Technical Data



Saunova (Ni2) and Innova (Ni)



HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30Ni2-P-C	3,0	2	4	260	260	1300	70	60	Saunova	100	1900
TH3-35Ni2-P-C	3,5	3	5	260	260	1300	70	60	Saunova	100	1900
TH3-45Ni2-P-C	4,5	3	5	260	260	1300	70	60	Saunova	100	1900
TH3-60Ni2-P-C	6,0	5	8	260	260	1300	70	60	Saunova	150	1900
TH4-60Ni2-P-C	6,0	5	9	315	315	1300	105	90	Saunova	150	1900
TH5-80Ni2-P-C	8,0	8	14	315	315	1300	105	90	Saunova	150	1900
TH5-90Ni2-P-C	9,0	8	14	315	315	1300	105	90	Saunova	150	1900
TH6-80Ni2-P-C	8,0	7	14	365	365	1300	160	100	Saunova	150	1900
TH6-90Ni2-P-C	9,0	8	15	365	365	1300	160	100	Saunova	150	1900
TH6-105Ni-P	10,5	9	16	365	365	1300	160	100	Innova	150	1900
TH6-120Ni-P	12,0	11	18	365	365	1300	160	100	Innova	200	2100
TH9-105Ni-P	10,5	10	16	450	450	1300	230	165	Innova	150	2100
TH9-120Ni-P	12,0	11	20	450	450	1300	230	165	Innova	150	2100
TH9-150Ni-P	15,0	14	25	450	450	1300	230	165	Innova	200	2100
TH9-180Ni-P	18,0	18	28	450	450	1300	230	165	Innova	200	2100
TH12-180Ni-P	18,0	15	26	545	545	1300	360	220	Innova	200	2300
TH12-210Ni-P	21,0	18	30	545	545	1300	360	220	Innova	200	2300
TH12-240Ni-P	24,0	22	35	545	545	1300	360	220	Innova	200	2300
TH12-240Ni-P	24,0	24	40	545	545	1300	360	220	Innova	200	2300

Built-in (NB) and Saunova/Innova (NS)



HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30NB-P NS-P-C	3,0	2	4	260	260	1300	70	60	separate	100/150	1900
TH3-45NB-P-C NS-P-C	3,5	3	6	260	260	1300	70	60	built-in (8+4h) separate	150/100	1900
TH3-60NB-P-C NS-P-C	6,0	5	8	260	260	1300	70	60	built-in (8+4h) separate	150/100	1900
TH4-60NB-P-C NS-P-C	6,0	5	9	315	315	1300	105	90	built-in (8+4h) separate	150/150	1900
TH5-80NB-P-C NS-P-C	8,0	7	13	315	315	1300	105	90	built-in (8+4h) separate	100/100	1900
TH5-90NS-P-C	9,0	8	14	315	315	1300	105	90	separate	150	1900
TH6-80NB-P-C NS-P-C	8,0	7	14	365	365	1300	160	100	built-in (8+4h) separate	100/100	1900
TH6-90NB-P-C NS-P-C	9,0	8	15	365	365	1300	160	100	built-in (8+4h) separate	100/100	1900
TH6-105NS-P	10,5	9	16	365	365	1300	160	100	separate	150	1900
TH6-120NS-P	12,0	11	18	365	365	1300	160	100	separate	200	2100
TH9-105NS-P	10,5	10	16	450	450	1300	230	165	separate	150	2100
TH9-120NS-P	12,0	11	20	450	450	1300	230	165	separate	150	2100
TH9-150NS-P	15,0	14	25	450	450	1300	230	165	separate	200	2100
TH9-180NS-P	18,0	18	28	450	450	1300	230	165	separate	200	2100
TH12-150NS-P	15,0	15	26	545	545	1300	360	220	separate	200	2300
TH12-180NS-P	18,0	18	30	545	545	1300	360	220	separate	200	2300
TH12-210NS-P	21,0	22	35	545	545	1300	360	220	separate	200	2300
TH12-240NS-P	24,0	24	40	545	545	1300	360	220	separate	200	2300

Heater Accessories (Optional)

Integration Collars for Round



Stainless steel
(for TH4 and TH5)



Stainless steel



Wooden
Cedar (D) and Aspen (A)



Soapstone

Heater Guards for Round



Wooden
Cedar (D) and Aspen (A)



MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
TH-COLLAR-V2-ST4	420 420 105

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
TH-COLLAR-ST2	460 460 45
TH-COLLAR-ST4	540 540 45
TH-COLLAR-ST6	640 640 45
TH-COLLAR-ST8	720 720 45
TH-COLLAR-ST12	820 820 45

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
TH-COLLAR-W2-D A	440 440 45
TH-COLLAR-W4-D A	485 485 45
TH-COLLAR-W6-D A	540 540 45
TH-COLLAR-W8-D A	560 560 45
TH-COLLAR-W12-D A	685 685 45

MODEL	SIZE OF COLLAR LENGTH WIDTH HEIGHT (mm)
TH-COLLAR-S2	507 507 45
TH-COLLAR-S4	560 560 45
TH-COLLAR-S6	620 620 45
TH-COLLAR-S8	680 680 45
TH-COLLAR-S12	790 790 45

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)	MODEL
TH-GUARD-W2-D A	510 510 45	TH2 TH3
TH-GUARD-W4-D A	560 560 45	TH4 TH5
TH-GUARD-W6-D A	620 620 45	TH6
TH-GUARD-W8-D A	680 680 45	TH9
TH-GUARD-W12-D A	790 790 45	TH12



TOWER Wall

Tower Wall is a timelessly elegant heater that releases long-lasting mild, steady and humid heat. The Wall model is a wonderful space-saver while still being the show-stopper of the sauna.


To increase the heater's power output to over 24,0kW, two Wall heaters can be linked together for an output of up to 48,0kW.

- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova (Ni2), Innova (Ni), Saunova/Innova (NS) and Built-in (NB)
- » Casing: Stainless steel
- » Moving rings for replacement of broken stones
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series
NB, NS, Ni2, Ni

Technical Data



Saunova (Ni2) and Innova (Ni)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30Ni2-WL-P-C	3,0	2	4	*230	385	1395	70	60	Saunova	100	1900
TH3-35Ni2-WL-P-C	3,5	3	6	*230	385	1395	70	60	Saunova	100	1900
TH3-45Ni2-WL-P-C	4,5	3	6	*230	385	1395	70	60	Saunova	100	1900
TH5-60Ni2-WL-P-C	6,0	5	8	*230	385	1395	70	60	Saunova	100	1900
TH4-60Ni2-WL-P-C	6,0	5	9	*250	475	1395	105	90	Saunova	100	1900
TH5-80Ni2-WL-P-C	8,0	8	14	*250	475	1395	105	90	Saunova	100	1900
TH5-90Ni2-WL-P-C	9,0	8	14	*250	475	1395	105	90	Saunova	100	1900
TH6-80Ni2-WL-P-C	8,0	7	14	*320	550	1395	160	100	Saunova	100	1900
TH6-90Ni2-WL-P-C	9,0	8	15	*320	550	1395	160	100	Saunova	100	1900
TH6-105Ni-WL-P	10,5	9	16	*320	550	1395	160	100	Innova	100	1900
TH9-120Ni-WL-P	12,0	11	18	*320	550	1395	160	100	Innova	100	2100
TH9-105Ni-WL-P	10,5	10	16	*355	650	1395	230	165	Innova	100	2100
TH9-120Ni-WL-P	12,0	11	20	*355	650	1395	230	165	Innova	100	2100
TH9-150Ni-WL-P	15,0	14	25	*355	650	1395	230	165	Innova	100	2100
TH12-150Ni-WL-P	15,0	15	26	*425	790	1395	360	220	Innova	100	2300
TH12-180Ni-WL-P	18,0	18	30	*425	790	1395	360	220	Innova	100	2300
TH12-210Ni-WL-P	21,0	22	35	*425	790	1395	360	220	Innova	100	2300
TH12-240Ni-WL-P	24,0	24	40	*425	790	1395	360	220	Innova	100	2300




Built-in (NB) and Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30-NS-WL-P	3,0	2	4	*230	385	1395	70	60	built-in (8+4h)separate	100	1900
TH3-35-NS-WL-P-C	3,5	3	6	*230	385	1395	70	60	built-in (8+4h)separate	100	1900
TH3-45-NS-WL-P-C	4,5	3	6	*230	385	1395	70	60	built-in (8+4h)separate	100	1900
TH5-60-NS-WL-P-C	6,0	5	8	*230	385	1395	70	60	built-in (8+4h)separate	100	1900
TH4-60-NS-WL-P-C	6,0	5	9	*250	475	1395	105	90	built-in (8+4h)separate	100	1900
TH5-80-NS-WL-P-C	8,0	7	13	*250	475	1395	105	90	built-in (8+4h)separate	100	1900
TH5-90NS-WL-P-C	9,0	8	14	*250	475	1395	105	90	separate	100	1900
TH6-80-NS-WL-P-C	8,0	7	14	*320	550	1395	160	100	built-in (8+4h)separate	100	1900
TH6-90-NS-WL-P-C	9,0	8	15	*320	550	1395	160	100	built-in (8+4h)separate	100	1900
TH6-105NS-WL-P	10,5	9	16	*320	550	1395	160	100	separate	100	2100
TH9-120NS-WL-P	12,0	11	18	*320	550	1395	160	100	separate	100	2100
TH9-105NS-WL-P	10,5	10	16	*355	650	1395	230	165	separate	100	2100
TH9-120NS-WL-P	12,0	11	20	*355	650	1395	230	165	separate	100	2100
TH9-150NS-WL-P	15,0	14	25	*355	650	1395	230	165	separate	100	2100
TH9-180NS-WL-P	18,0	18	28	*355	650	1395	230	165	separate	100	2300
TH12-150NS-WL-P	15,0	15	26	*425	790	1395	360	220	separate	100	2300
TH12-180NS-WL-P	18,0	18	30	*425	790	1395	360	220	separate	100	2300
TH12-210NS-WL-P	21,0	22	35	*425	790	1395	360	220	separate	100	2300
TH12-240NS-WL-P	24,0	24	40	*425	790	1395	360	220	separate	100	2300

*Depth when installed to the wall.

Heater Accessories (Optional)

Integration Collars for Wall



MODEL	SIZE OF COLLAR (length width height) (mm)	
TH-COLLAR-ST2-WL	460	45
TH-COLLAR-ST4-WL	540	45
TH-COLLAR-ST6-WL	640	45
TH-COLLAR-ST8-WL	720	45
TH-COLLAR-ST12-WL	820	45

MODEL	SIZE OF COLLAR (length width height) (mm)	
TH-COLLAR-W2-WL-D A	345	45
TH-COLLAR-W4-WL-D A	385	45
TH-COLLAR-W6-WL-D A	425	45
TH-COLLAR-W8-WL-D A	480	45
TH-COLLAR-W12-WL-D A	545	45

MODEL	SIZE OF COLLAR (length width height) (mm)	
TH-COLLAR-S2-WL	345	45
TH-COLLAR-S4-WL	380	45
TH-COLLAR-S6-WL	425	45
TH-COLLAR-S8-WL	475	45
TH-COLLAR-S12-WL	545	45

Heater Guards for Wall



MODEL	SIZE OF GUARD RAIL (length width height) (mm)		MODEL
TH-GUARD-W2-WL-D A	355	445	TH2 TH3
TH-GUARD-W4-WL-D A	375	395	TH4 TH5
TH-GUARD-W6-WL-D A	435	350	TH6
TH-GUARD-W8-WL-D A	485	300	TH9
TH-GUARD-W12-WL-D A	555	240	TH12



TOWER

Corner

Tower Corner is specifically designed to fit into tight corners. It makes the most out of the sauna layout without sacrificing heat and style.


The Tower Corner will ensure a gentle, soothing warmth for a truly relaxing experience

- » Power range: 3,0 – 12,0kW
- » Available controls: Saunova (Ni2), Innova (Ni), Saunova/Innova (NS) and Built-in (NB)
- » Casing: Stainless steel
- » Moving upper part for replacement of broken stones
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series
NB, NS, Ni2, Ni

Technical Data



Saunova (Ni2) and Innova (Ni)

HEATER MODEL	kW	MIN MAX		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30Ni2-CNR-P-C	3,0	2	4	300	*300	1380	70	45	Saunova	100	1900
TH3-35Ni2-CNR-P-C	3,5	3	6	300	*300	1380	70	45	Saunova	100	1900
TH3-45Ni2-CNR-P-C	4,5	3	6	300	*300	1380	70	45	Saunova	100	1900
TH3-60Ni2-CNR-P-C	6,0	5	8	300	*300	1380	70	45	Saunova	100	1900
TH4-60Ni2-CNR-P-C	6,0	5	9	355	*355	1380	105	70	Saunova	100	1900
TH5-80Ni2-CNR-P-C	8,0	7	13	355	*355	1380	105	70	Saunova	100	1900
TH5-90Ni2-CNR-P-C	9,0	8	14	355	*355	1380	105	70	Saunova	100	1900
TH6-80Ni2-CNR-P	8,0	7	14	415	*415	1380	160	80	Saunova	100	1900
TH6-90Ni2-CNR-P	9,0	8	15	415	*415	1380	160	80	Saunova	100	1900
TH6-105Ni-CNR-P	10,5	9	16	415	*415	1380	160	100	Innova	100	1900
TH6-120Ni-CNR-P	12,0	11	18	415	*415	1380	160	100	Innova	100	2100

Built-in (NB)

HEATER MODEL	kW	MIN MAX		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30NB-CNR-P-C	3,0	2	4	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH3-35NB-CNR-P-C	3,5	3	6	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH3-45NB-CNR-P-C	4,5	3	6	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH3-60NB-CNR-P-C	6,0	5	8	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH4-60NB-CNR-P-C	6,0	5	9	355	*355	1380	105	70	built-in (8+4h)	125	1900
TH5-80NB-CNR-P-C	8,0	7	13	355	*355	1380	105	70	built-in (8+4h)	125	1900
TH6-80NB-CNR-P-C	8,0	7	14	415	*415	1380	160	80	built-in (8+4h)	125	1900
TH6-90NB-CNR-P-C	9,0	8	15	415	*415	1380	160	80	built-in (8+4h)	125	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH3-35NS-CNR-P-C	3,5	3	6	300	*300	1380	70	45	separate	100	1900
TH3-45NS-CNR-P-C	4,5	3	6	300	*300	1380	70	45	separate	100	1900
TH3-60NS-CNR-P-C	6,0	5	8	300	*300	1380	70	45	separate	100	1900
TH4-60NS-CNR-P-C	6,0	5	9	355	*300	1380	105	70	separate	100	1900
TH5-80NS-CNR-P-C	8,0	7	13	355	*355	1380	105	70	separate	100	1900
TH5-90NS-CNR-P-C	9,0	8	14	355	*355	1380	105	70	separate	100	1900
TH6-80NS-CNR-P-C	8,0	7	14	415	*355	1380	160	80	separate	100	1900
TH6-90NS-CNR-P-C	9,0	8	15	415	*415	1380	160	80	separate	100	1900
TH6-105NS-CNR-P	10,5	9	16	415	*415	1380	160	80	separate	100	1900
TH6-120NS-CNR-P	12,0	11	18	415	*415	1380	160	80	separate	100	2100

*Depth when installed to the wall.

Heater Accessories (Optional)

Integration Collars for Corner



Stainless steel



Wooden
Cedar (D) and Aspen (A)



Soapstone

Heater Guards for Corner



Wooden
Cedar (D) and Aspen (A)



MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST-CNR	220	670	45
TH-COLLAR-ST-CNR-D	235	720	45
TH-COLLAR-ST-CNR-A	245	795	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-WZ-CNR-D	205	660	45
TH-COLLAR-WZ-CNR-D-A	215	670	45
TH-COLLAR-WZ-CNR-D-A	235	755	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-SZ-CNR	425	425	45
TH-COLLAR-SZ-CNR-D	475	475	45
TH-COLLAR-SZ-CNR-A	535	535	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-GUARD-WZ-CNR-D-A	240	195	90
TH-GUARD-WZ-CNR-D-A	255	370	90
TH-GUARD-WZ-CNR-D-A	270	735	90

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH2 TH3 TH6			



ARIES

Round

Aries Round is a stylish eye-catcher that delivers consistent heat from top to bottom. It can be placed perfectly in the middle of the sauna or embedded into the benches.

- » Power range: 4,5 – 18,0kW
- » Available controls: Saunova (Ni2), Saunova/ Innova (NS), Built-in (NB)
- » Built-in stone spacer
- » Casing: Stainless steel or black steel
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series

NB, NS, Ni2,



Black Stainless Series

NB, NS, Ni2,

Technical Data



Aries Round
(Ni2)

Aries Round Black
(Ni2)




Aries Round
(NS)

Aries Round Black
(NS)



Aries Round
(NB)

Aries Round Black
(NB)



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45Ni2-P-C ARI3-45Ni2-BL-P-C	4,5	3	6	300	300	930	60	Saunova	100	1900
ARI3-60Ni2-P-C ARI3-60Ni2-BL-P-C	6,0	5	9	300	300	930	60	Saunova	100	1900
ARI3-75Ni2-P-C ARI3-75Ni2-BL-P-C	7,5	7	12	300	300	930	60	Saunova	100	1900
ARI3-90Ni2-P-C ARI3-90Ni2-BL-P-C	9,0	8	13	300	300	930	60	Saunova	100	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NS-P-C ARI3-45NS-BL-P-C	4,5	3	6	300	300	930	60	separate	100	1900
ARI3-60NS-P-C ARI3-60NS-BL-P-C	6,0	5	9	300	300	930	60	separate	100	1900
ARI3-75NS-P-C ARI3-75NS-BL-P-C	7,5	7	12	300	300	930	60	separate	100	1900
ARI3-90NS-P-C ARI3-90NS-BL-P-C	9,0	8	14	300	300	930	60	separate	100	1900
ARI6-90NS-P-C ARI6-90NS-BL-P-C	9,0	8	14	440	440	930	110	separate	100	1900
ARI6-105NS-P ARI6-105NS-BL-P	10,5	9	15	440	440	930	110	separate	100	1900
ARI6-120NS-P ARI6-120NS-BL-P	12,0	10	18	440	440	930	110	separate	100	2100
ARI6-150NS-P ARI6-150NS-BL-P	15,0	13	23	440	440	930	110	separate	100	2100
ARI6-180NS-P ARI6-180NS-BL-P	18,0	15	26	440	440	930	110	separate	125	2100

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NB-P-C ARI3-45NB-BL-P-C	4,5	3	6	300	300	930	60	built-in (8+4h)	100	1900
ARI3-60NB-P-C ARI3-60NB-BL-P-C	6,0	5	9	300	300	930	60	built-in (8+4h)	100	1900
ARI3-75NB-P-C ARI3-75NB-BL-P-C	7,5	7	12	300	300	930	60	built-in (8+4h)	100	1900
ARI3-90NB-P-C ARI3-90NB-BL-P-C	9,0	8	14	300	300	930	60	built-in (8+4h)	100	1900
ARI6-90NB-P-C ARI6-90NB-BL-P-C	9,0	8	14	440	440	930	110	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Round



Stainless steel
(for ARI3)



Stainless steel



Wooden
Cedar (D) and Aspen (A)



Soapstone



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR (length width height) (mm)
TH-COLLAR-V2-ST4	420 420 105

MODEL	SIZE OF COLLAR (length width height) (mm)
TH-COLLAR-ST4	540 540 45
TH-COLLAR-ST5	540 540 45

MODEL	SIZE OF COLLAR (length width height) (mm)
TH-COLLAR-W4-D A	585 585 45
TH-COLLAR-W6-D A	540 540 45

MODEL	SIZE OF COLLAR (length width height) (mm)
TH-COLLAR-S4	560 560 45
TH-COLLAR-S6	620 620 45

MODEL	SIZE OF COLLAR (length width height) (mm)	MODEL
ARI3-GUARD-W3-D A	570 570 110	ARI3
ARI3-GUARD-W6-D A	700 700 110	ARI6



ARIES

Wall

Aries Wall is a space-saving wonder that combines practicality and elegance with its sleek design. It is perfect for wall-installation, freeing up valuable space in the sauna.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/ Innova (NS), Built-in (NB)
- » Built-in stone spacer
- » Casing: Stainless steel or black steel
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series
NB, NS, Ni2



Black Stainless Series
NB, NS, Ni2

Technical Data



Aries Wall
(Ni2)

Aries Wall Black
(Ni2)




Aries Wall
(NS)

Aries Wall Black
(NS)



Aries Wall
(NB)

Aries Wall Black
(NB)



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NI2-WL-P-C ARI3-45NI2-WL-BL-P-C	4,5	3	6	*250	415	1030	65	Saunova	100	1900
ARI3-60NI2-WL-P-C ARI3-60NI2-WL-BL-P-C	6,0	5	9	*250	415	1030	65	Saunova	100	1900
ARI3-75NI2-WL-P-C ARI3-75NI2-WL-BL-P-C	7,5	7	13	*250	415	1030	65	Saunova	100	1900
ARI3-90NI2-WL-P-C ARI3-90NI2-WL-BL-P-C	9,0	8	14	*250	415	1030	65	Saunova	100	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NS-WL-P-C ARI3-45NS-WL-BL-P-C	4,5	3	6	*250	415	1030	65	separate	100	1900
ARI3-60NS-WL-P-C ARI3-60NS-WL-BL-P-C	6,0	5	9	*250	415	1030	65	separate	100	1900
ARI3-75NS-WL-P-C ARI3-75NS-WL-BL-P-C	7,5	7	13	*250	415	1030	65	separate	100	1900
ARI3-90NS-WL-P-C ARI3-90NS-WL-BL-P-C	9,0	8	14	*250	415	1030	65	separate	100	1900

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NB-WL-P-C ARI3-45NB-WL-BL-P-C	4,5	3	6	*250	415	1030	65	built-in (8+4h)	100	1900
ARI3-60NB-WL-P-C ARI3-60NB-WL-BL-P-C	6,0	5	9	*250	415	1030	65	built-in (8+4h)	100	1900
ARI3-75NB-WL-P-C ARI3-75NB-WL-BL-P-C	7,5	7	13	*250	415	1030	65	built-in (8+4h)	100	1900
ARI3-90NB-WL-P-C ARI3-90NB-WL-BL-P-C	9,0	8	14	*250	415	1030	65	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Wall



Stainless



Wooden
Cedar (D) and Aspen (A)



Soapstone



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST4-WL	380	700	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W4-WL-D A	380	715	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S4-WL	390	720	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
ARI-GUARD-W3-WL-D A	665	380	110

MODEL
ARI3



ARIES

Corner

Aries Corner makes the most of the sauna layout without settling for anything less than exceptional. The Corner model is designed to fit snugly into tight corners, rendering it perfect for saunas with limited space.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/ Innova (NS), Built-in (NB)
- » Built-in stone spacer
- » Casing: Stainless steel or black steel
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series


NB, NS, Ni2, Ni



Black Stainless Series

NB, NS, Ni2, Ni

Technical Data



Aries Corner
(Ni2)

Aries Corner Black
(Ni2)

Saunova (Ni2)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45Ni2-CNR-P-C ARI3-45Ni2-CNR-BL-P-C	4,5	3	6	335	*335	1000	65	Saunova	100	1900
ARI3-60Ni2-CNR-P-C ARI3-60Ni2-CNR-BL-P-C	6,0	5	9	335	*335	1000	65	Saunova	100	1900
ARI3-75Ni2-CNR-P-C ARI3-75Ni2-CNR-BL-P-C	7,5	7	13	335	*335	1000	65	Saunova	100	1900
ARI3-90Ni2-CNR-P-C ARI3-90Ni2-CNR-BL-P-C	9,0	8	14	335	*335	1000	65	Saunova	100	1900



Aries Corner
(NS)

Aries Corner Black
(NS)

Saunova/Innova (NS)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NS-CNR-P-C ARI3-45NS-CNR-BL-P-C	4,5	3	6	335	*335	1000	65	separate	100	1900
ARI3-60NS-CNR-P-C ARI3-60NS-CNR-BL-P-C	6,0	5	9	335	*335	1000	65	separate	100	1900
ARI3-75NS-CNR-P-C ARI3-75NS-CNR-BL-P-C	7,5	7	13	335	*335	1000	65	separate	100	1900
ARI3-90NS-CNR-P-C ARI3-90NS-CNR-BL-P-C	9,0	8	14	335	*335	1000	65	separate	100	1900



Aries Corner
(NB)

Aries Corner Black
(NB)

Built-in (NB)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NB-CNR-P-C ARI3-45NB-CNR-BL-P-C	4,5	3	6	335	*335	1000	65	built-in (8+4h)	100	1900
ARI3-60NB-CNR-P-C ARI3-60NB-CNR-BL-P-C	6,0	5	9	335	*335	1000	65	built-in (8+4h)	100	1900
ARI3-75NB-CNR-P-C ARI3-75NB-CNR-BL-P-C	7,5	7	13	335	*335	1000	65	built-in (8+4h)	100	1900
ARI3-90NB-CNR-P-C ARI3-90NB-CNR-BL-P-C	9,0	8	14	335	*335	1000	65	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Corner



Stainless

Wooden

Soapstone

Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST4-CNR	235	730	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-WN-CNR-D A	215	670	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S4-CNR	475	475	45

Heater Guards for Corner



Wooden

Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
ARI-GUARD-W3-CNR-D A	215	635	110



MODEL
ARI3

CUBOS

Cubos is the ultimate 3-in-1 heater – it can be placed either in the middle, corner or wall of the sauna room. The additional protective cover* allows for wall and/or corner installation.

This modern and versatile heater is truly one of a kind.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Casing: Stainless steel
- » Built-in stone spacer
- » Adjustable legs
- » Optional heater guard and integration collar

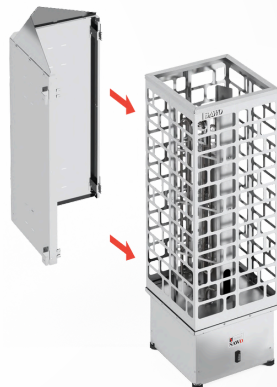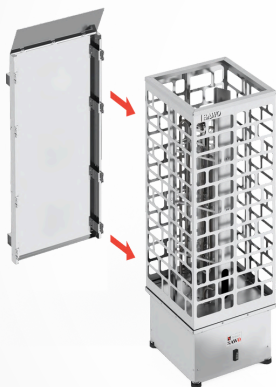






WALL INSTALLATION

The protective cover allows the heater to be installed against the wall, if the sauna is limited in space. The protective cover set for wall installation includes a covering sheet and a reflector that directs heat even to the lowest parts of the sauna room, ensuring that it heats up entirely.

CORNER INSTALLATION

Cubos quickly changes to corner model with a protective cover for corner. Corner installation saves space and allows for different bench designs. The protective cover for corner set includes two pieces of covering sheet and a reflector.

Technical Data

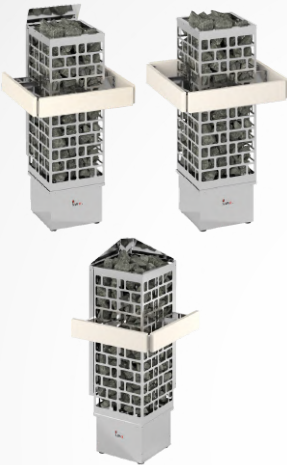

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER (mm)								STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	MIDDLE		WALL		CORNER		HEIGHT	A			B		
				LENGTH	WIDTH	LENGTH	WIDTH	LENGTH	WIDTH							
CUB3-45Ni2-P-C	4,5	3	6	290	290	290	340	340	340	930	75	Saunova	100	100	1900	
CUB3-60Ni2-P-C	6,0	5	9	290	290	290	340	340	340	930	75	Saunova	100	100	1900	
CUB3-75Ni2-P-C	7,5	7	13	290	290	290	340	340	340	930	75	Saunova	100	135	1900	
CUB3-90Ni2-P-C	9,0	8	14	290	290	290	340	340	340	930	75	Saunova	125	135	1900	

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER (mm)								STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN (m³)	MAX	MIDDLE		WALL		CORNER		HEIGHT	A			B	C	
				LENGTH	WIDTH	LENGTH	WIDTH	LENGTH	WIDTH							
CUB3-45NS-P-C	4,5	3	6	290	290	290	340	340	340	930	75	separate	100	100	1900	
CUB3-60NS-P-C	6,0	5	9	290	290	290	340	340	340	930	75	separate	100	100	1900	
CUB3-75NS-P-C	7,5	7	13	290	290	290	340	340	340	930	75	separate	100	135	1900	
CUB3-90NS-P-C	9,0	8	14	290	290	290	340	340	340	930	75	separate	125	135	1900	

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER (mm)						STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	MIDDLE LENGTH	MIDDLE WIDTH	WALL LENGTH	WALL WIDTH	CORNER LENGTH	CORNER WIDTH			A	B		
															(m ²)
CUB3-45NB-P-C	4,5	3	6	290	290	290	340	340	340	930	75	built-in (8+4h)	100	100	1900
CUB3-60NB-P-C	6,0	5	9	290	290	290	340	340	340	930	75	built-in (8+4h)	100	100	1900
CUB3-75NB-P-C	7,5	7	13	290	290	290	340	340	340	930	75	built-in (8+4h)	100	135	1900
CUB3-90NB-P-C	9,0	8	14	290	290	290	340	340	340	930	75	built-in (8+4h)	125	135	1900

Heater Accessories (Optional)

Integration Collars for Cubos



Wooden Collar for CUB3 Middle Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-COLLAR-W3-D	540	540	45
CUB-COLLAR-W3-A	540	540	45



Stainless Steel Collar for CUB3 Middle Installation

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-COLLAR-ST3	525	525	45



Soapstone Collar for CUB3 Middle Installation

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-COLLAR-S3	535	535	45



Wooden Collar for CUB3 Middle Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-GUARD-W3-D	530	530	90
CUB-GUARD-W3-A	530	530	90



Wooden Collar for CUB3 Wall Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-COLLAR-W3-WL-D	465	465	45
CUB-COLLAR-W3-WL-A	465	465	45



Stainless Steel Collar for CUB3 Wall Installation

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-COLLAR-ST3-WL	460	525	45



Soapstone Collar for CUB3 Wall Installation

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-COLLAR-S3-WL	465	535	45



Wooden Collar for CUB3 Wall Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-GUARD-W3-WL-D	460	530	90
CUB-GUARD-W3-WL-A	460	530	90



Wooden Collar for CUB3 Corner Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-COLLAR-W3-CNR-D	540	540	45
CUB-COLLAR-W3-CNR-A	540	540	45



Stainless Steel Collar for CUB3 Corner Installation

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-COLLAR-ST3-CNR	460	460	45



Soapstone Collar for CUB3 Corner Installation

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-COLLAR-S3-CNR	465	465	45



Wooden Collar for CUB3 Corner Installation
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
CUB-GUARD-W3-CNR-D	460	460	90
CUB-GUARD-W3-CNR-A	460	460	90



PHOENIX

Rising from the ashes, our **Phoenix** heater makes the user feel reborn and refreshed.

The broadening shape, inspired by the Olympic torch, allows more stones to be placed in the top, ensuring the creation of a greater amount of pampering steam.

- » Power range: 4,5 – 18,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS)
- » Stainless steel tubes hold the stones
- » Stone spacer inside to prolong heating elements lifespan
- » Floor standing
- » Can fit from 85kg to 130kg of stones
- » Adjustable legs
- » Optional heater guard and integration collar



Phoenix
(NS)



Phoenix
(Ni2)

Technical Data



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX (m³)	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)			A	B
PNX3-45Ni2-P-C	4,5	3	6	340	375	1100	85	Saunova	100	1900
PNX3-60Ni2-P-C	6,0	5	9	340	375	1100	85	Saunova	125	1900
PNX3-75Ni2-P-C	7,5	7	13	340	375	1100	85	Saunova	125	1900
PNX3-90Ni2-P-C	9,0	8	14	340	375	1100	85	Saunova	150	1900
PNX6-90Ni2-P-C	9,0	8	15	475	525	1175	130	Saunova	150	1900



Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX (m³)	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)			A	B
PNX3-45NS-P-C	4,5	3	6	340	375	1100	85	separate	100	1900
PNX3-60NS-P-C	6,0	5	9	340	375	1100	85	separate	125	1900
PNX3-75NS-P-C	7,5	7	13	340	375	1100	85	separate	125	1900
PNX3-90NS-P-C	9,0	8	14	340	375	1100	85	separate	150	1900
PNX6-90NS-P-C	9,0	8	15	475	525	1175	130	separate	150	1900
PNX6-105NS-P	10,5	9	16	475	525	1175	130	separate	150	1900
PNX6-120NS-P	12,0	11	18	475	525	1175	130	separate	150	2100
PNX6-150NS-P	15,0	14	25	475	525	1175	130	separate	150	2100
PNX6-180NS-P	18,0	18	28	475	525	1175	130	separate	175	2100

Heater Accessories (Optional)

Integration Collars for Phoenix

Heater Guards for Phoenix



Stainless steel



Stainless steel



Wooden
Cedar (D) and Aspen (A)



Soapstone



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-V2-ST4	420	420	105

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-ST4	540	540	45
TH-COLLAR-ST9	640	640	45

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-W4-D A	200	495	150
TH-COLLAR-W9-D A	233	608	150

MODEL	SIZE OF COLLAR		
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
TH-COLLAR-S4	560	560	45
TH-COLLAR-S9	590	690	45

MODEL	SIZE OF GUARD RAIL			MODEL
	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	
PNX-GUARD-W3-A D	560	550	90	PNX3 PNX6



HEATERKING

Heaterking heaters by Finnish Stefan Lindfors emanate king-size heat and feature a bold design cover.

Its unique, stainless steel Junglefire pattern decorates the cover with style.

The Heaterking comes in Round, Wall, and Corner models.



- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Casing: Stainless steel with intricate Junglefire pattern
- » Stone spacer inside to prolong heating elements lifespan
- » Can fit from 60kg to 360kg of stones
- » Adjustable legs
- » Optional heater guard




- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Casing: Stainless steel with intricate Junglefire pattern
- » Stone spacer inside to prolong heating elements lifespan
- » Can fit from 60kg to 250kg of stones
- » Wall type stainless steel casing
- » Adjustable legs
- » Heat reflector included



- » Power range: 3,5 – 12,0kW
- » Available controls: Saunova/Innova (NS)
- » Casing: Stainless steel with intricate Junglefire pattern
- » Stone spacer inside to prolong heating elements lifespan
- » Can fit from 45kg to 160kg of stones
- » Corner-type stainless steel casing
- » Adjustable legs
- » Heat reflector included

Technical Data

Saunova/Innova (NS)

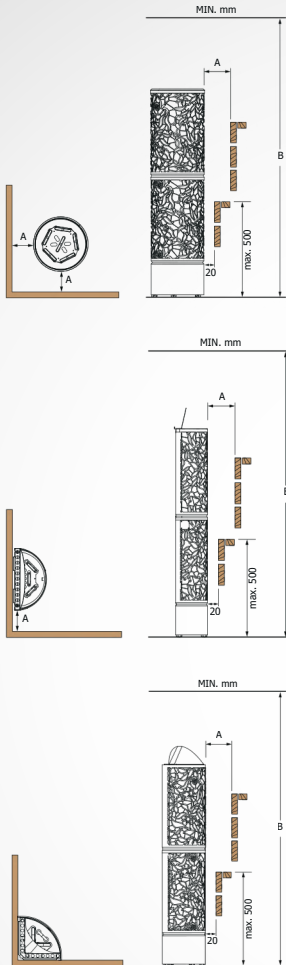

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With StoneSpacer		A	B
DRFT2-30NS-P	3,0	2	4	250	250	1325	70	60	separate	150	1900
DRFT3-35NS-P-C	3,5	3	6	250	250	1325	70	60	separate	100	1900
DRFT3-45NS-P-C	4,5	3	6	250	250	1325	70	60	separate	100	1900
DRFT3-60NS-P-C	6,0	5	8	250	250	1325	70	60	separate	150	1900
DRFT4-60NS-P-C	6,0	5	9	295	295	1325	105	90	separate	100	1900
DRFT5-80NS-P-C	8,0	7	13	295	295	1325	105	90	separate	200	1900
DRFT5-90NS-P-C	9,0	8	14	295	295	1325	105	90	separate	200	1900
DRFT6-80NS-P-C	8,0	7	14	355	355	1325	160	100	separate	100	1900
DRFT6-90NS-P-C	9,0	8	15	355	355	1325	160	100	separate	100	1900
DRFT6-105NS-P	10,5	9	16	355	355	1325	160	100	separate	150	1900
DRFT6-120NS-P	12,0	11	18	355	355	1325	160	100	separate	200	2100
DRFT9-105NS-P	10,5	10	16	425	425	1325	230	165	separate	150	2100
DRFT9-120NS-P	12,0	11	20	425	425	1325	230	165	separate	150	2100
DRFT9-150NS-P	15,0	14	25	425	425	1325	230	165	separate	200	2100
DRFT9-180NS-P	18,0	18	28	425	425	1325	230	165	separate	200	2100
DRFT12-150NS-P	15,0	15	26	525	525	1325	360	220	separate	200	2300
DRFT12-180NS-P	18,0	18	30	525	525	1325	360	220	separate	200	2300
DRFT12-210NS-P	21,0	22	35	525	525	1325	360	220	separate	200	2300
DRFT12-240NS-P	24,0	24	40	525	525	1325	360	220	separate	200	2300

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With StoneSpacer		A	B
DRFT3-35NS-WL-P-C	3,5	3	6	*220	395	1440	80	60	separate	100	1900
DRFT3-45NS-WL-P-C	4,5	3	6	*220	395	1440	80	60	separate	100	1900
DRFT3-60NS-WL-P-C	6,0	5	8	*220	395	1440	80	60	separate	100	1900
DRFT6-80NS-WL-P-C	8,0	7	14	*300	550	1475	160	105	separate	100	1900
DRFT6-90NS-WL-P-C	9,0	8	15	*300	550	1475	160	105	separate	100	1900
DRFT6-105NS-WL-P	10,5	9	16	*300	550	1475	160	105	separate	100	1900
DRFT6-120NS-WL-P	12,0	11	18	*300	550	1475	160	105	separate	100	2100
DRFT9-105NS-WL-P	10,5	10	16	*350	650	1510	180	115	separate	100	2100
DRFT9-120NS-WL-P	12,0	11	20	*350	650	1510	180	115	separate	100	2100
DRFT9-150NS-WL-P	15,0	14	25	*350	650	1510	180	115	separate	100	2100
DRFT9-180NS-WL-P	18,0	18	28	*350	650	1510	180	115	separate	100	2100
DRFT12-150NS-WL-P	15,0	15	26	*420	790	1545	250	165	separate	100	2300
DRFT12-180NS-WL-P	18,0	18	30	*420	790	1545	250	165	separate	100	2300
DRFT12-240NS-WL-P	21,0	22	35	*420	790	1545	250	165	separate	100	2300
	24,0	24	40	*420	790	1545	250	165	separate	100	2300

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With StoneSpacer		A	B
DRFT3-35NS-CNR-P-C	3,5	3	6	*300	300	1410	70	45	separate	100	1900
DRFT3-45NS-CNR-P-C	4,5	3	6	*300	300	1410	70	45	separate	100	1900
DRFT3-60NS-CNR-P-C	6,0	5	8	*300	300	1410	70	45	separate	100	1900
DRFT6-80NS-CNR-P-C	8,0	7	14	*410	410	1430	160	100	separate	100	1900
DRFT6-90NS-CNR-P-C	9,0	8	15	*410	410	1430	160	100	separate	100	1900
DRFT6-105NS-CNR-P	10,5	9	16	*410	410	1430	160	100	separate	100	1900
DRFT6-120NS-CNR-P	12,0	11	18	*410	410	1430	160	100	separate	100	2100

Heater Accessories (Optional)

Heaterking Round Heater Guards



Wooden Heater Guard for DRFT 2 and 3 H.E Round Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-WG-D	110	510	105
DRFT-WG-A	110	510	105



Wooden Heater Guard for DRFT 4 and 5 H.E Round Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-WG-D	560	560	105
DRFT-WG-A	560	560	105



Wooden Heater Guard for DRFT 6 H.E Round Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-WG-D	620	620	105
DRFT-WG-A	620	620	105



Wooden Heater Guard for DRFT 9 H.E Round Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-WG-D	690	690	105
DRFT-WG-A	690	690	105



Wooden Heater Guard for DRFT 12 H.E Round Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
DRFT-W12-D	790	790	105
DRFT-W12-A	790	790	105



FIBERJUNGLE




Fiberjungle by Finnish designer Stefan Lindfors features a unique design – coated with eye-catching black fiber.

While bold and gorgeous, the heater also has a cool-to-touch coating for increased safety around the heater.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs



Technical Data

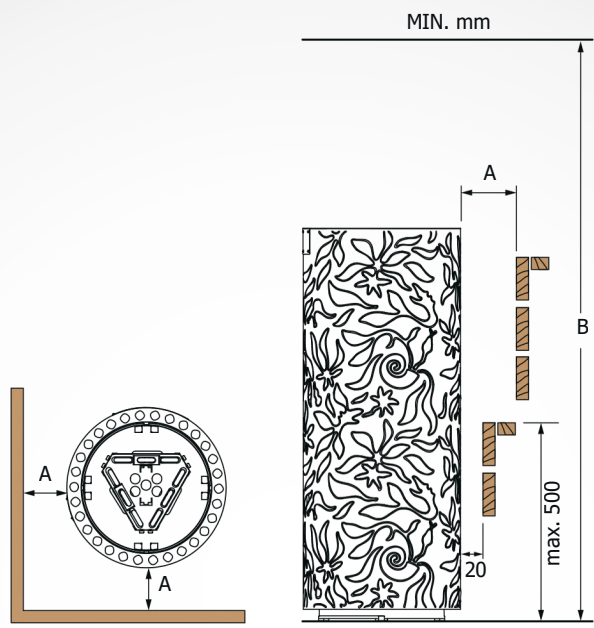

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
DRF3-45NS-P-C	4,5	3	6	300	300	930	60	separate	100	1900
DRF3-60NS-P-C	6,0	5	9	300	300	930	60	separate	100	1900
DRF3-75NS-P-C	7,5	7	12	300	300	930	60	separate	100	1900
DRF3-90NS-P-C	9,0	8	13	300	300	930	60	separate	100	1900



SAuna WORLD



sawo.com



SAWO Sauna



Sawo Inc.