



WALL MOUNTED

SERIES



SAuna WORLD



sawo.com



SAWO Sauna



Sawo Inc.



Mini

Mini heater can be placed in tight spaces due to its size and reversible control unit that can be attached to either the right or the left side of the heater. The Mini is also available with cool-to-touch fiber coating.

- » Power range: 2,3 – 3,6kW
- » Available controls: Built-in (NB)




Mini
(NB)



Mini Fibercoated
(NB)

Technical Data

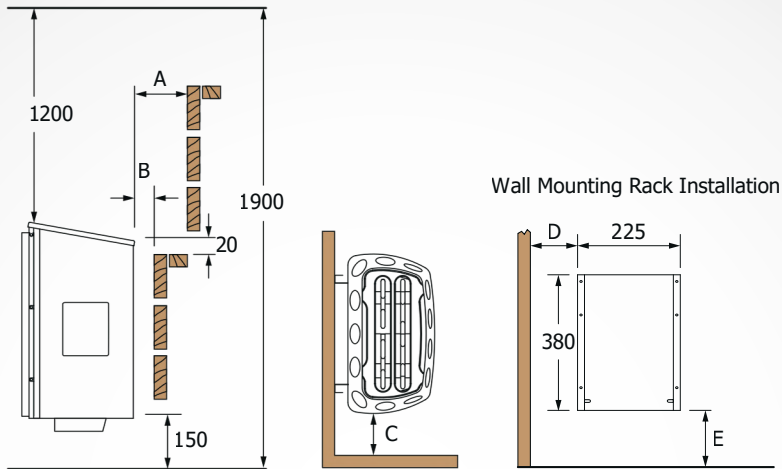

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D	E
MN-23NB-Z MN-23NB-P-F	2,3	1,3	2,5	*215	435	**455	11	built-in (8+4h)	100	20	100	140	155
MN-30NB-Z MN-30NB-P-F	3,0	2	4	*215	435	**455	11	built-in (8+4h)	100	20	100	140	155
MN-36NB-Z MN-36NB-P-F	3,6	3	6	*215	435	**455	11	built-in (8+4h)	100	20	100	140	155

*Depth when installed to the wall.

**Reflector not included.



MINI X

Mini X is a space-saver that is placed in the corner of a sauna room. It is available with cool-to-touch fiber coating, and compatible with Saunova or Innova controls (NS).

- » Power range: 2,3 – 3,6kW
- » Available controls: Saunova/Innova (NS), Built-in (NB)




Mini X
(NS | NB)



Mini X Fibercoated
(NS | NB)

Technical Data

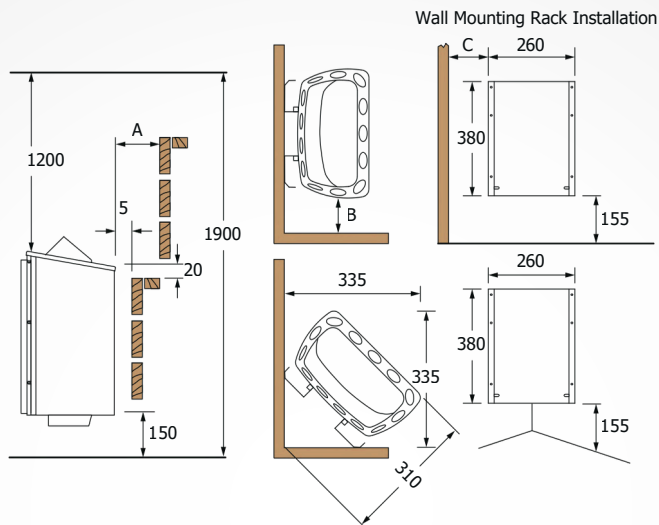

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN (m³)	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C
MX-23NS-Z I MX-23NS-P-F	2,3	1,3	2,5	*310	330	485	8 - 11	separate	30	20	60
MX-30NS-Z I MX-30NS-P-F	3,0	2	4	*310	330	485	8 - 11	separate	35	25	65
MX-36NS-Z I MX-36NS-P-F	3,6	3	6	*310	330	485	8 - 11	separate	40	25	65

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN (m³)	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C
MX-23NB-Z I MX-23NB-P-F	2,3	1,3	2,5	*310	330	485	8 - 11	built-in (8+4h)	30	20	60
MX-30NB-Z I MX-30NB-P-F	3,0	2	4	*310	330	485	8 - 11	built-in (8+4h)	35	25	65
MX-36NB-Z I MX-36NB-P-F	3,6	3	6	*310	330	485	8 - 11	built-in (8+4h)	40	25	65

*Wall mounted/corner mounted.



Mini Combi

Mini Combi combines a regular sauna experience with a water tank for increased humidity. It is available with cool-to-touch fiber-coating.

- » Power range: 3,0 – 3,6kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 1,0kW steam generator
- » Built-in aroma cups




Mini Combi
(NS)



Mini Combi
Fibercoated
(NS)

Technical Data

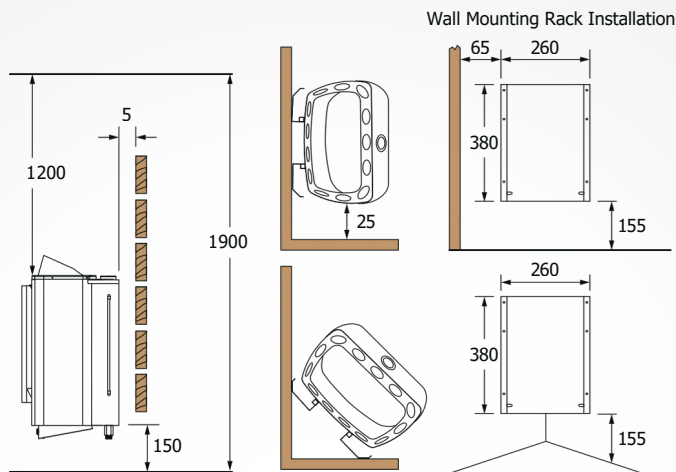

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
			MIN	MAX	LENGTH	WIDTH (mm)	HEIGHT		
MNC-30NS-Z	3,0	1 x 1,0	2	4	**330	260	*500	8 -10,5	separate
MNC-30NS-P-F	3,0	1 x 1,0	2	4	**330	260	*500	8 -10,5	separate
MNC-36NS-Z	3,6	1 x 1,0	3	6	**330	260	*500	8 -10,5	separate
MNC-36NS-P-F	3,0	1 x 1,0	3	6	**330	260	*500	8 -10,5	separate

*Depth when installed to the wall.
**Reflector not included.



Scandia

Scandia is a staple classic among sauna heaters. This simple heater gives the traditional Finnish sauna experience. It is available with cool-to-touch fiber coating, and compatible with Saunova or Innova controls (NS).




Scandia
(NB | NS)

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova/Innova (NS), Built-in (NB)



Scandia Fibercoated
(NB | NS)

Technical Data

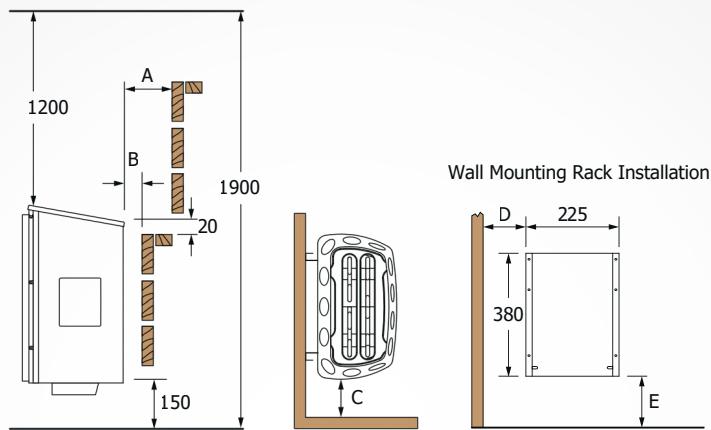

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SCA-45NS-Z-C SCA-45NS-P-F-C	4,5	3	6	*290	410	**515	18-22	separate	100	100	185	155
SCA-60NS-Z-C SCA-60NS-P-F-C	6,0	5	8	*290	410	**515	18-22	separate	100	100	185	155
SCA-80NS-Z-C SCA-80NS-P-F-C	8,0	7	13	*290	410	**585	18-22	separate	100	100	185	235
SCA-90NS-Z-C SCA-90NS-P-F-C	9,0	8	14	*290	410	**585	18-22	separate	100	100	185	235

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SCA-45NB-Z-C SCA-45NB-P-F-C	4,5	3	6	*290	515	**515	18-22	built-in (8+4h)	100	100	185	155
SCA-60NB-Z-C SCA-60NB-P-F-C	6,0	5	8	*290	515	**515	18-22	built-in (8+4h)	100	100	185	155
SCA-80NB-Z-C SCA-80NB-P-F-C	8,0	7	13	*290	515	**585	18-22	built-in (8+4h)	100	100	185	235
SCA-90NB-Z-C SCA-90NB-P-F-C	9,0	8	14	*290	515	**585	18-22	built-in (8+4h)	100	100	185	235

*Depth when installed to the wall.
**Reflector not included.



Scandia Combi

Scandia Combi heater comes with a water tank for increased humidity and an aroma cup for using sauna scents. Available with cool-to-touch fiber coating, and compatible with Saunova or Innova controls (NS).

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 1,0kW or 2,0kW steam generator
- » Built-in aroma cups




Scandia Combi
(NB)



Scandia Combi Fibercoated
(NB)

Technical Data

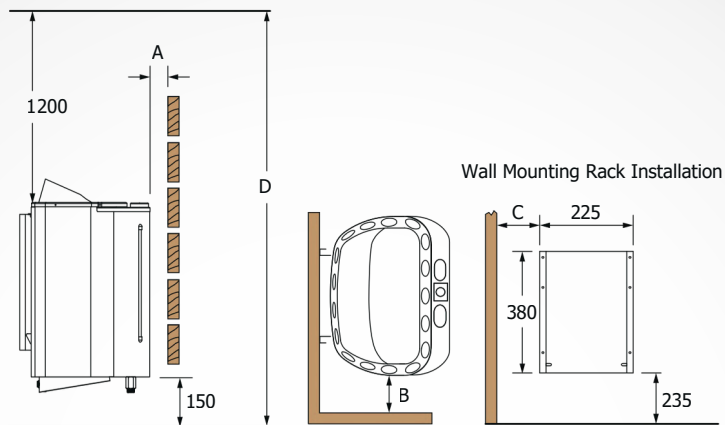

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
SCAC-60NS-Z-C I SCAC-60NS-P-F-C	6,0	5	9	*365	410	595	18-22	separate	5	50	135	1900
SCAC-80NS-Z-C I SCAC-80NS-P-F-C	8,0	7	13	*365	410	595	18-22	separate	5	50	135	1900
SCAC-90NS-Z-C I SCAC-90NS-P-F-C	9,0	8	14	*365	410	595	18-22	separate	5	50	135	1900

*Depth when installed to the wall.



Krios

Krios provides a larger stone container for higher and more humid heat. It also features the signature SAWO pattern in a stainless steel casing. The Krios heater is compatible with Saunova (Ni2, NS), and Innova (NS) controls.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Wall mounted
- » Casing: Stainless steel
- » Heat reflector included
- » Built-in control unit can be attached to the left, right, or front of the heater
- » Can fit 50kg of stones



Krios
(NB)




Krios
(NS)



Krios
(Ni2)

Technical Data

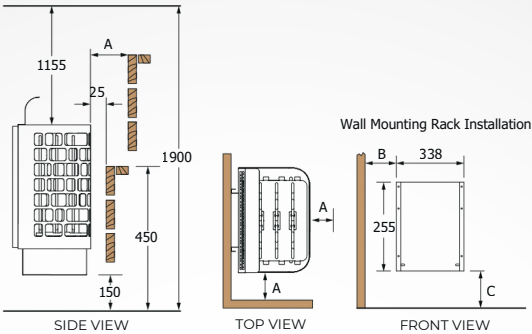

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
KRI-45Ni2-P-C	4,5	3	6	*290	390	**600	40	Saunova 2.0	50	75	345
KRI-60Ni2-P-C	6,0	5	8	*290	390	**600	40	Saunova 2.0	80	105	345
KRI-80Ni2-P-C	8,0	7	13	*290	390	**670	50	Saunova 2.0	100	125	415
KRI-90Ni2-P-C	9,0	8	14	*290	390	**670	50	Saunova 2.0	100	125	415

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
KRI-45NS-P-C	4,5	3	6	*290	390	**580	40	Innova	50	75	320
KRI-60NS-P-C	6,0	5	8	*290	390	**580	40	Innova	80	105	320
KRI-80NS-P-C	8,0	7	13	*290	390	**650	50	Innova	100	125	390
KRI-90NS-P-C	9,0	8	14	*290	390	**650	50	Innova	100	125	390

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
KRI-45NB-P-C	4,5	3	6	*290	390	**580	40	Built-in	50	75	320
KRI-60NB-P-C	6,0	5	8	*290	390	**580	40	Built-in	80	105	320
KRI-80NB-P-C	8,0	7	13	*290	390	**650	50	Built-in	100	125	390
KRI-90NB-P-C	9,0	8	14	*290	390	**650	50	Built-in	100	125	390

*Depth when installed to the wall.
**Reflector not included.

Krios Heater Guards



Wooden
Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
KRI-GUARD-W-D	385	620	90
KRI-GUARD-W-A	385	620	90

Nordex

Nordex heater is available with stainless steel or black metal casing, and compatible with separate Saunova (Ni2/NS) and Innova (NS) controls.

» Power range: 4,5 – 9,0kW
» Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)



Nordex
(NB)



Nordex Black
(NB)



Nordex
(NS)



Nordex Black
(NS)




Nordex
(Ni2)



Nordex Black
(Ni2)

Technical Data

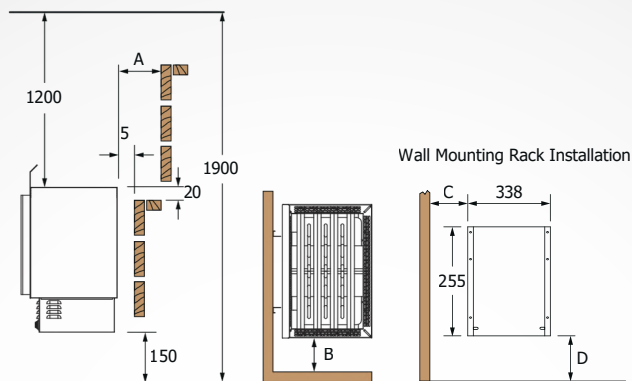

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
NRN-45Ni2-Z-C NRN-45Ni2-BL-Z-C	4,5	3	6	*295	400	**515	22	Saunova 2.0	50	50	130	270
NRN-60Ni2-Z-C NRN-60Ni2-BL-Z-C	6,0	5	9	*295	400	**515	22	Saunova 2.0	50	50	130	270
NRN-80Ni2-Z-C NRN-80Ni2-BL-Z-C	8,0	7	13	*295	400	**590	22	Saunova 2.0	80	80	160	330
NRN-90Ni2-Z-C NRN-90Ni2-BL-Z-C	9,0	8	14	*295	400	**590	22	Saunova 2.0	80	80	160	330


Built-in (NB) and Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
NRN-45NB/NS-Z-C NRN-45NB/NS-BL-Z-C	4,5	3	6	*295	400	**515	18-22	built-in (8+4h)	50	50	80	320
NRN-60NB/NS-Z-C NRN-60NB/NS-BL-Z-C	6,0	5	9	*295	400	**515	18-22	built-in (8+4h)	50	50	80	320
NRN-80NB/NS-Z-C NRN-80NB/NS-BL-Z-C	8,0	7	13	*295	400	**590	18-22	built-in (8+4h)	80	80	110	395
NRN-90NB/NS-Z-C NRN-90NB/NS-BL-Z-C	9,0	8	14	*295	400	**590	18-22	built-in (8+4h)	80	80	110	395

*Depth when installed to the wall.

**Reflector not included.

Nordex Heater Guards

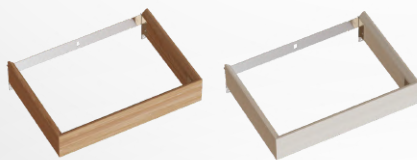

Wooden

Cedar (D) and Aspen (A)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT (mm)
NRN-GUARD-W-D	100	465	75
NRN-GUARD-W-A	100	465	75



Nordex Combi

Nordex Combi adds humidity to the heat with its water tank. It is available with stainless steel or black metal casing, and compatible with separate Saunova and Innova (NS) controls.

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW or 2,0kW steam generator
- » Built-in aroma cups




Nordex Combi
(NS)



Nordex Combi Black
(NS)

Technical Data

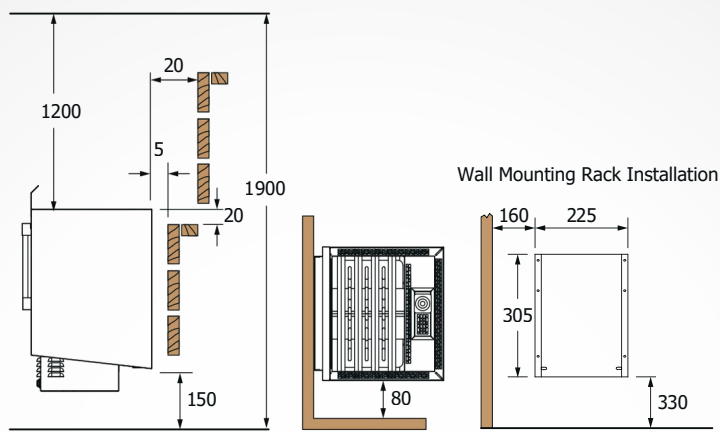

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kG)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
NRNC-60NS-Z-C NRNC-60NS-BL-Z-C	6,0	5	9	**385		**580	22	Innova
NRNC-80NS-Z-C NRNC-80NS-BL-Z-C	8,0	7	13	**385		**580	22	Innova
NRNC-90NS-Z-C NRNC-90NS-BL-Z-C	9,0	8	14	**385		**580	22	Innova

*Depth when installed to the wall.
**Reflector not included.

Nordex Mini

The ultra-compact **Nordex Mini** can be wall mounted into a straight or corner position. It is available with stainless steel or black metal casing, and compatible with separate Saunova (Ni2, NS) and Innova (NS) controls.



Nordex Mini
(NB)



Nordex Mini Black
(NB)



Nordex Mini
(NS)



Nordex Mini Black
(NS)




Nordex Mini
(Ni2)



Nordex Mini Black
(Ni2)

Technical Data

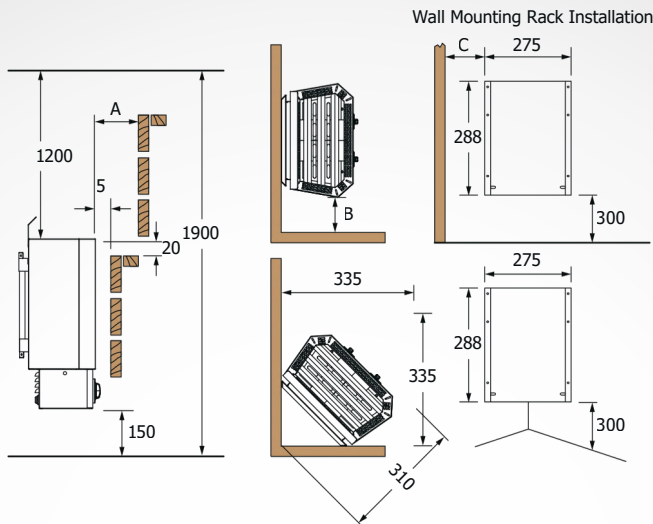

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
NRM-23Ni2-Z-C	2,3	1,3	2,5	*200	340	**500	8-11	Saunova	50	30	85
NRM-30Ni2-Z-C	3,0	2	4	*200	340	**500	8-11	Saunova	50	30	85
NRM-36Ni2-Z-C	3,6	3	6	*200	340	**500	8-11	Saunova	50	30	85

*Depth when installed to the wall.
**Reflector not included.

Saunova/Innova (NS) and Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
NRM-23NS-Z	2,3	1,3	2,5	*200	340	**500	8-11	separate	30 50	20 30	60 85
NRM-30NS-Z	3,0	2	4	*200	340	**500	8-11	separate	35 50	25 30	65 85
NRM-36NS-Z	3,6	3	6	*200	340	**500	8-11	separate	40 50	25 30	65 85
NRM-23NB-Z	2,3	1,3	2,5	*200	340	**500	8-11	built-in (8+4h)	30 50	20 30	60 85
NRM-30NB-Z	3,0	2	4	*200	340	**500	8-11	built-in (8+4h)	35 50	25 30	65 85
NRM-36NB-Z	3,6	3	6	*200	340	**500	8-11	built-in (8+4h)	40 50	25 30	65 85

*Depth when installed to the wall.
**Reflector not included.



Nordex Mini Combi

The ultra-compact **Nordex Mini Combi** adds humidity to the heat with its water tank. It is available with stainless steel or black metal casing, and compatible with separate Saunova (NS) and Innova (NS) controls.

- » Power range: 3,0 – 3,6kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW steam generator
- » Built-in aroma cups




Nordex Mini Combi (NS)



Nordex Mini Combi Black (NS)

Technical Data

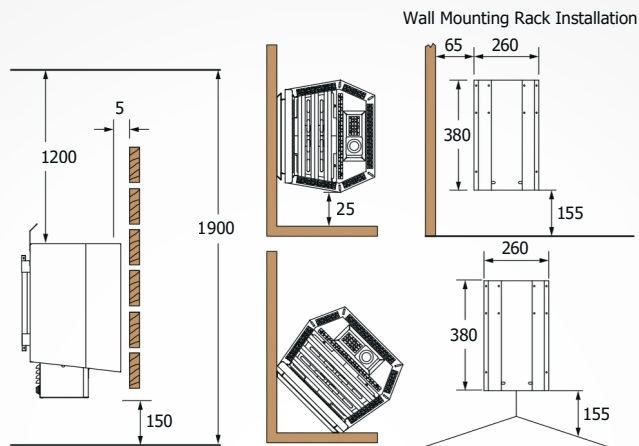

Saunova (Ni2)

HEATER MODEL	kW	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kG)	CONTROL
			MIN	MAX	LENGTH	WIDTH	HEIGHT		
NRMC-30NS-Z	3,0	1 x 0,8	2	4	*300	345	**525	8-10,5	separate
NRMC-36NS-Z	3,6	1 x 0,8	3	6	*300	345	**525	8-10,5	separate

*Depth when installed to the wall.

**Reflector not included.

Scandifire

Scandifire “by Finnish Stefan Lindfors gives the classic Scandia model a bolder, unique look with its Junglefire pattern”. The pattern is combined with cool-to-touch fiber coating, and the heater is compatible with Saunova and Innova controls (NS).



Scandifire Red
(NB)



Scandifire Black
(NB)




Scandifire Red
(NS)



Scandifire Black
(NS)

Technical Data

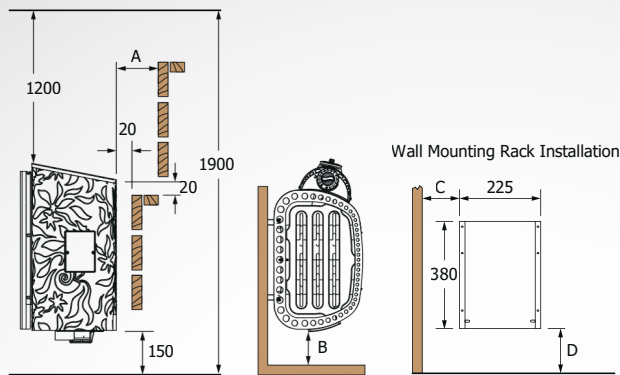

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova/Innova (NS), Built-in (NB)
- » Casing: Fibercoated with Junglefire pattern
- » Wall mounted
- » Can fit 22kg of stones
- » Built-in models: Control knobs are with light indicator
- » Coating shields the heater from moisture and high temperature

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN (m³)	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
SCA-45NS-DRF-P-C SCA-45NS-DRF-BL-P-C	4,5	3	6	*290	410	455	18-22	separate	60	50	135	155
SCA-60NS-DRF-P-C SCA-60NS-DRF-BL-P-C	6,0	5	9	*290	410	455	18-22	separate	60	50	135	155
SCA-80NS-DRF-P-C SCA-80NS-DRF-BL-P-C	8,0	7	13	*290	410	525	18-22	separate	60	50	135	235
SCA-90NS-DRF-P-C SCA-90NS-DRF-BL-P-C	9,0	8	14	*290	410	525	18-22	separate	60	50	135	235

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN (m³)	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
SCA-45NB-DRF-P-C SCA-45NB-DRF-BL-P-C	4,5	3	6	*290	515	455	18-22	built-in (8+4h)	50	50	185	155
SCA-60NB-DRF-P-C SCA-60NB-DRF-BL-P-C	6,0	5	9	*290	515	455	18-22	built-in (8+4h)	50	50	185	155
SCA-80NB-DRF-P-C SCA-80NB-DRF-BL-P-C	8,0	7	13	*290	515	525	18-22	built-in (8+4h)	100	100	185	235
SCA-90NB-DRF-P-C SCA-90NB-DRF-BL-P-C	9,0	8	14	*290	515	525	18-22	built-in (8+4h)	100	100	185	235

*Depth when installed to the wall.

Minidragon



Minidragon is the most compact of the heaters designed by Stefan Lindfors, developed to decorate even tighter spaces with beauty. The heater comes with cool-to-touch fiber coating, and it is compatible with Saunova and Innova controls (NS).



Minidragon Red
(NB)



Minidragon Black
(NB)




Minidragon Red
(NS)



Minidragon Black
(NS)

Technical Data

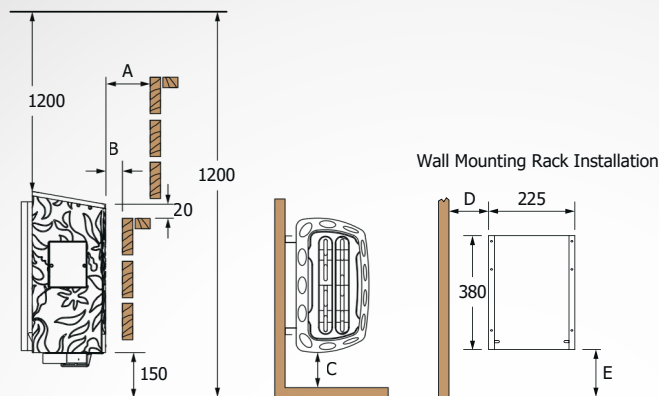

- » Power range: 2,3 – 3,6kW
- » Available controls: Saunova/Innova (NS), Built-in (NB)
- » Casing: Fibercoated with Junglefire pattern
- » Wall mounted
- » Can fit 11kg of stones
- » Built-in models: Control knobs are with light indicator

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN (m³)	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D	E
MN-23NS-DRF-P	2,3	1,3	2,5	*215	435	455	8-11	separate	50	20	40	90	155
MN-23NS-DRF-BL-P													
MN-30NS-DRF-P	3,0	2	4	*215	435	455	8-11	separate	60	20	50	90	155
MN-30NS-DRF-BL-P													
MN-36NS-DRF-P	3,6	3	6	*215	435	455	8-11	separate	90	20	50	90	155
MN-36NS-DRF-BL-P													

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES				
		MIN (m³)	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D	E
MN-23NB-DRF-P	2,3	1,3	2,5	*215	435	455	8-11	built-in (8+4h)	50	20	40	140	155
MN-23NB-DRF-BL-P													
MN-30NB-DRF-P	3,0	2	4	*215	435	455	8-11	built-in (8+4h)	60	20	50	140	155
MN-30NB-DRF-BL-P													
MN-36NB-DRF-P	3,6	3	6	*215	435	455	8-11	built-in (8+4h)	90	20	80	140	155
MN-36NB-DRF-BL-P													

*Depth when installed to the wall.



SAuna WORLD



sawo.com



SAWO Sauna



Sawo Inc.