



COMBI

SERIES



SAuna World

 sawo.com

   [SAWO Sauna](#)

 [Sawo Inc.](#)



Taurus D Combi

Thanks to the **Taurus D Combi**, the wellness experience is now even easier to personalize. The heater combines a steamer with the Taurus D innovation: two or more heating elements options.

With the Taurus D Combi, bathers can enjoy a traditional or a steam sauna experience. It comes with a scent basin, so the user can rejuvenate in therapeutic steam infused with their favorite essential oils and fragrances.


Using the heater is as hassle-free as it gets. It features a water level detection system that signals when the water level is low, similarly to other Combi heaters. The heater's auto-refill feature can also be activated for maximum convenience.



Taurus D Combi
(NS)



Technical Data

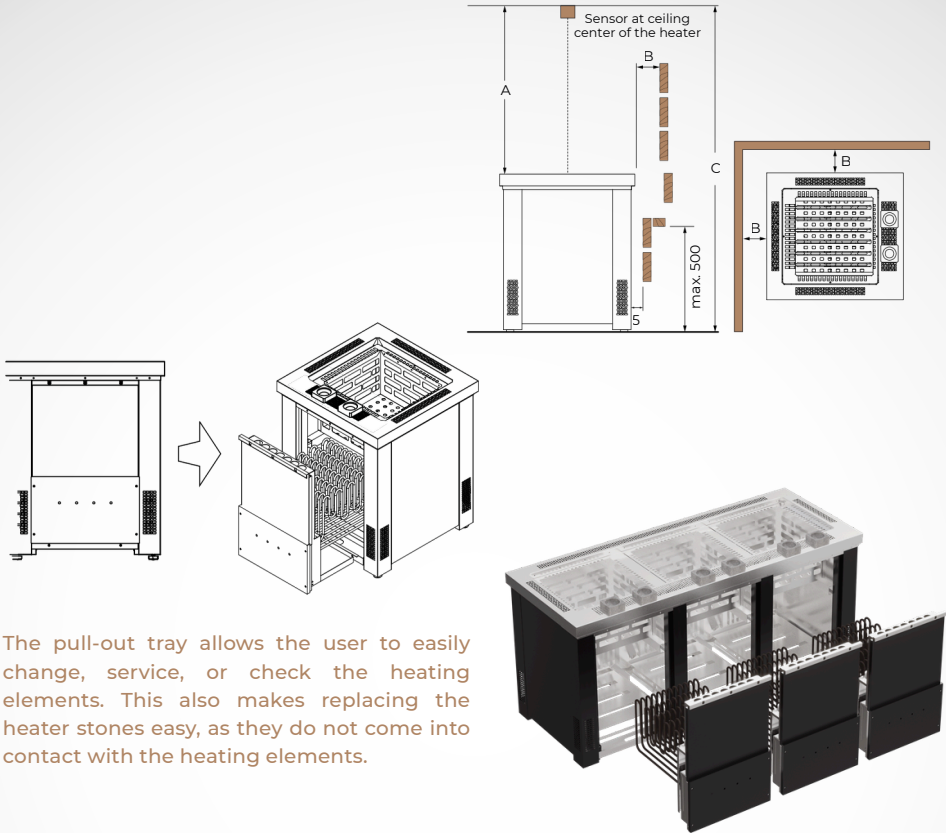

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES		
			MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
TRDC-90/120NS-G-P	9,0 12,0	1 X 2,0	8	18	555	555	690	50	separate	1210	5/*50	1900
TRDC-150/180NS-G-P	15,0 18,0	1 X 2,0	13	29	555	705	690	65-75	separate	1410	5/*50	2100
TRDC-180/210/240NS-G-P	18,0 21,0 24,0	2 X 2,0	18	42	555	970	690	90-100	separate	1410	5/*50	2100
TRDC-270/300/330/360NS-G-P	27,0 30,0 33,0 36,0	3 X 2,0	32	75	555	1385	690	150	separate	1410	5/*50	2100

*For commercial use




Nordex Pro Combi

Building on the Nordex tradition, the **Nordex Pro Combi** introduces an enhanced design that combines efficient heating with the added comfort of steam. An integrated water tank delivers gentle humidity, while the separated stone and element design enhances durability.

The Nordex Pro Combi's pull-out cassette tray simplifies maintenance, and the model can be paired with up to two additional units for a maximum of 27,0kW + 6,0kW in larger sauna rooms.






Nordex Pro Combi
(NS)

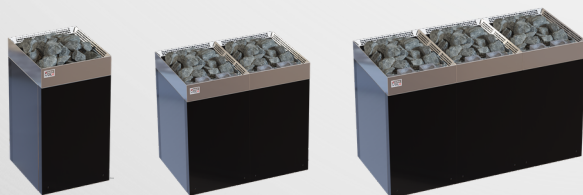

- » Power range: 6,0 – 9,0kW
- » Available controls:
Saunova/Innova (NS)
- » Built-in aroma cups
- » Adjustable legs
- » Separate water tank with 0,8kW
steam generator

Technical Data

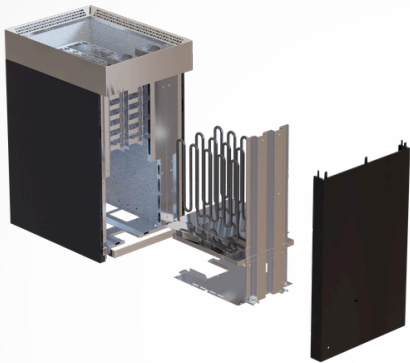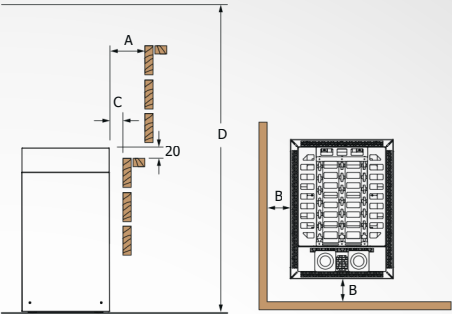

Nordex Pro Combi
Connection Kit

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements

The Nordex Pro Combi Connection Kit* is required in order to connect two or more Pros.

*sold separately


Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN (m³)	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
NRNC-PRO-60NS-BL-Z-C	6,0	1 x 0,8	5	9	500	370	705	60	separate	5	50	5	1900
NRNC-PRO-80NS-BL-Z-C	8,0	1 x 2,0	8	14	500	370	705	60	separate	5	80	5	1900
NRNC-PRO-90NS-BL-Z-C	9,0	1 x 2,0	8	14	500	370	705	60	separate	5	80	5	1900



Nordex S Combi

The **Nordex S Combi** is now available in a steamier version. Balance the intense heat with an additional water tank for more steam. Also available with a black metal casing.

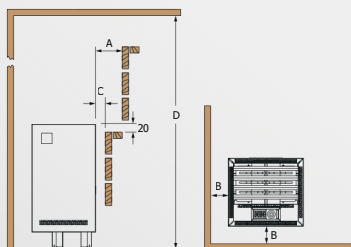

**Nordex S
Combi Black
(NS)**

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW or 2,0kW steam generator
- » Built-in aroma cups
- » Adjustable legs



**Nordex S Combi
(NS)**

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
NRNSC-60NS	6,0	5	9	360	395	710	8	separate	5	50	5	1990
NRNSC-60NS-BL	6,0	5	9	360	395	710	8	separate	5	50	5	1990
NRNSC-80NS	8,0	7	13	360	395	710	8	separate	5	80	5	1990
NRNSC-80NS-BL	8,0	7	13	360	395	710	8	separate	5	80	5	1990
NRNSC-90NS	9,0	8	14	360	395	710	8	separate	5	80	5	1990
NRNSC-90NS-BL	9,0	8	14	360	395	710	8	separate	5	80	5	1990



Nordex Combi

Nordex Combi adds humidity to the heat with its water tank. It is available with stainless steel or black metal casing, and compatible with separate Saunova and Innova (NS) controls.

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW or 2,0kW steam generator
- » Built-in aroma cups




Nordex Combi
(NS)



Nordex Combi Black
(NS)

Technical Data

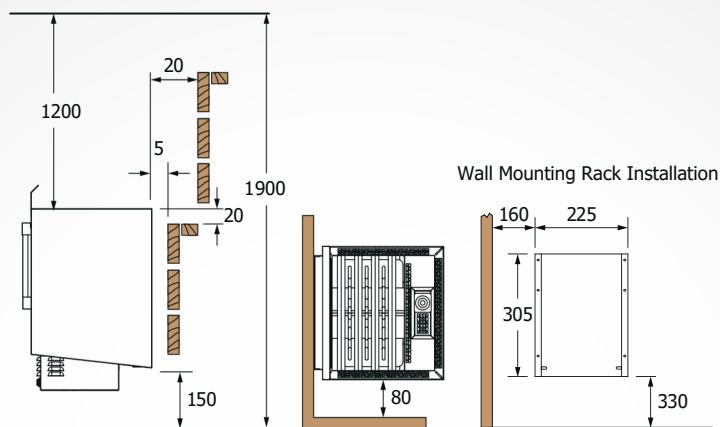

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
NRNC-60NS-Z-C NRNC-60NS-BL-Z-C	6,0	5	9	**385		**580	22	Innova
NRNC-80NS-Z-C NRNC-80NS-BL-Z-C	8,0	7	13	**385		**580	22	Innova
NRNC-90NS-Z-C NRNC-90NS-BL-Z-C	9,0	8	14	**385		**580	22	Innova

*Depth when installed to the wall.
**Reflector not included.



Nordex Mini Combi

The ultra-compact **Nordex Mini Combi** adds humidity to the heat with its water tank. It is available with stainless steel or black metal casing, and compatible with separate Saunova (NS) and Innova (NS) controls.

- » Power range: 3,0 – 3,6kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW steam generator
- » Built-in aroma cups




Nordex Mini Combi (NS)



Nordex Mini Combi Black (NS)

Technical Data

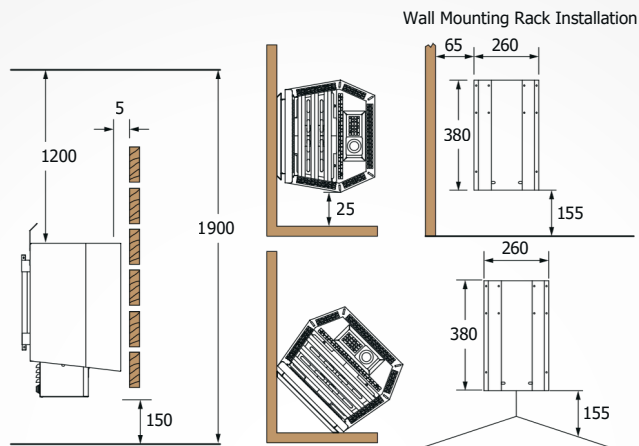

Saunova/Innova (NS)

HEATER MODEL	kW	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
			MIN	MAX	LENGTH	WIDTH	HEIGHT		
			(m³)		(mm)				
NRMC-30NS-Z	3,0	1 x 0,8	2	4	*300	345	**525	8-10,5	separate
NRMC-36NS-Z	3,6	1 x 0,8	3	6	*300	345	**525	8-10,5	separate

*Depth when installed to the wall.

**Reflector not included.



Mini Combi

Mini Combi combines a regular sauna experience with a water tank for increased humidity. It is available with cool-to-touch fiber-coating.

- » Power range: 3,0 – 3,6kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 1,0kW steam generator
- » Built-in aroma cups




Mini Combi
(NS)



Mini Combi
Fibercoated
(NS)

Technical Data

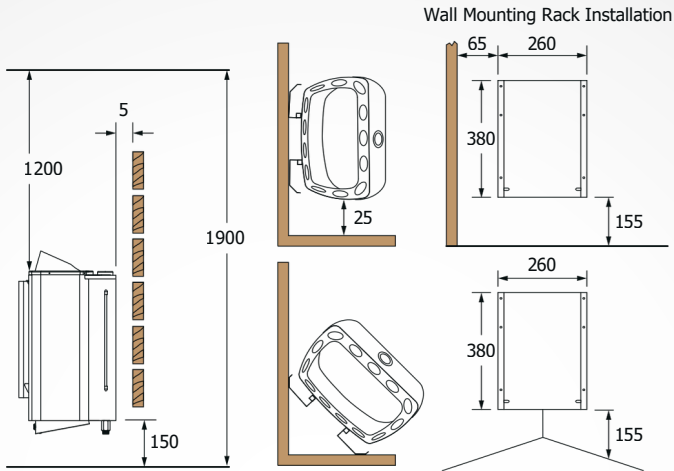

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
			MIN	MAX	LENGTH	WIDTH (mm)	HEIGHT		
MNC-30NS-Z	3,0	1 x 1,0	2	4	**330	260	*500	8 -10,5	separate
MNC-30NS-P-F	3,0	1 x 1,0	2	4	**330	260	*500	8 -10,5	separate
MNC-36NS-Z	3,6	1 x 1,0	3	6	**330	260	*500	8 -10,5	separate
MNC-36NS-P-F	3,0	1 x 1,0	3	6	**330	260	*500	8 -10,5	separate

*Depth when installed to the wall.

**Reflector not included.



Savonia Combi

Savonia Combi offers the best of both worlds: the heat of a Savonia and a water tank for more steam and humidity. It is available with cool-to-touch fiber coating and an auto-refill function for the water tank.

- » Power range: 9,0 – 18,0kW
- » Available controls: Saunova/Innova (NS)
- » Built-in aroma cups
- » Separate water tank with 1,0kW or 2,0kW steam generator
- » Adjustable legs
- » Optional: auto-refill feature for automatically refilling the water tank




Savonia Combi
Fibercoated
(NS)



Savonia Combi
(NS)

Technical Data

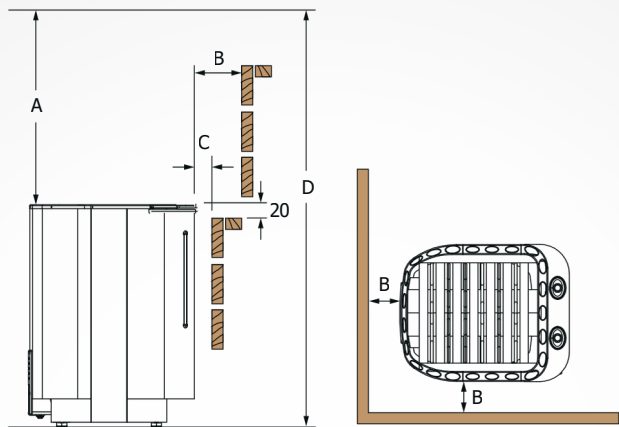

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
SAVC-90NS SAVC-90NS-Z-F	9,0	1 x 2,0	8	14	510	420	655	40-50	separate	1200	110	50	1900
SAVC-105NS SAVC-105NS-Z-F	10,5	1 x 2,0	9	15	510	420	655	40-50	separate	1200	120	60	1900
SAVC-120NS SAVC-120NS-Z-F	12,0	1 x 2,0	10	18	510	420	655	40-50	separate	1400	130	70	2100
SAVC-150NS SAVC-120NS-Z-F	15,0	2 x 2,0	13	23	715	420	655	60-75	separate	1400	160	100	2100
SAVC-180NS SAVC-120NS-Z-F	18,0	2 x 2,0	17	29	715	420	655	60-75	separate	1400	160	100	2100



Scandia Combi

Scandia Combi heater comes with a water tank for increased humidity and an aroma cup for using sauna scents. Available with cool-to-touch fiber coating, and compatible with Saunova or Innova controls (NS).

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 1,0kW or 2,0kW steam generator
- » Built-in aroma cups




Scandia Combi
(NB)



Scandia Combi Fibercoated
(NB)

Technical Data

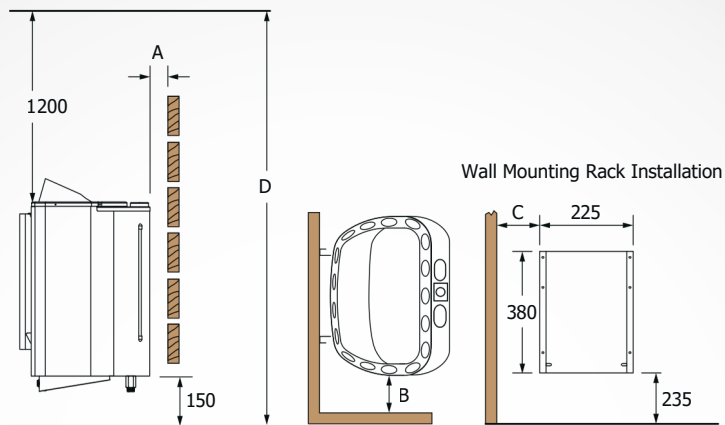

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SCAC-60NS-Z-C SCAC-60NS-P-F-C	6,0	5	9	*365	410	595	18-22	separate	5	50	135	1900
SCAC-80NS-Z-C SCAC-80NS-P-F-C	8,0	7	13	*365	410	595	18-22	separate	5	50	135	1900
SCAC-90NS-Z-C SCAC-90NS-P-F-C	9,0	8	14	*365	410	595	18-22	separate	5	50	135	1900

*Depth when installed to the wall.




Nimbus Combi

Nimbus Combi ramps up the steam with its water tank for a perfect balance of heat and humidity. The heater is compatible with Saunova and Innova controls (NS).

- » Power range: 9,0 – 18,0kW
- » Available controls:
Saunova/Innova (NS)
- » Built-in aroma cups
- » Optional: auto-refill feature for automatically refilling the water tank



Technical Data

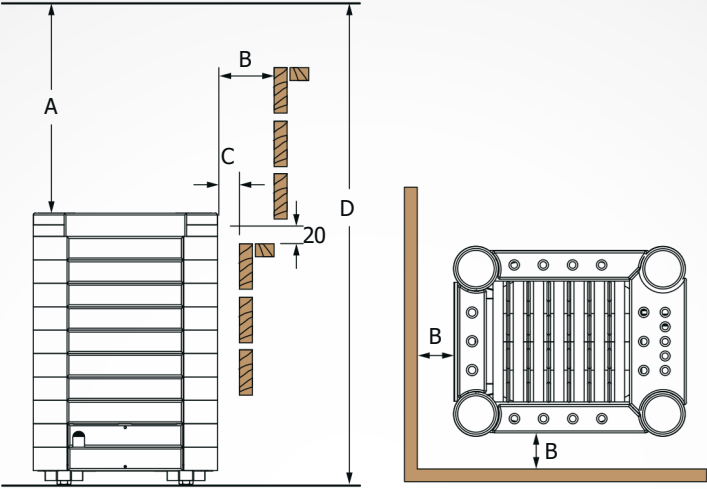

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	SOAPSTONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN (m³)	MAX	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)				A	B	C	D
NIMC-90NS-P	9,0	1 x 2,0	8	14	575	470	690	40-50	90	separate	1200	50	30	1900
NIMC-105NS-P	10,5	1 x 2,0	9	15	575	470	690	40-50	90	separate	1200	50	30	1900
NIMC-120NS-P	12,0	1 x 2,0	10	18	575	470	690	40-50	90	separate	1400	130	70	2100
NIMC-150NS-P	15,0	2 x 2,0	13	23	775	470	690	60-75	120	separate	1400	160	100	2100
NIMC-180NS-P	18,0	2 x 2,0	17	29	775	470	690	60-75	120	separate	1400	160	100	2100



SAuna WORld



sawo.com



SAWO Sauna



Sawo Inc.