



FLOOR

HEATER SERIES



SAuna World



sawo.com



SAWO Sauna



Sawo Inc.



Nordex

Pro


The newest addition to the trusted Nordex lineup, the Nordex Pro is engineered for long-lasting performance. Its separate stone compartment protects the heating elements and extends the unit's lifespan, while a pull-out cassette tray ensures effortless maintenance.

Although available in one physical size, the model can be paired with up to two additional units for a maximum of 27,0kW in larger sauna rooms.




Nordex Pro
(NS)


- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs

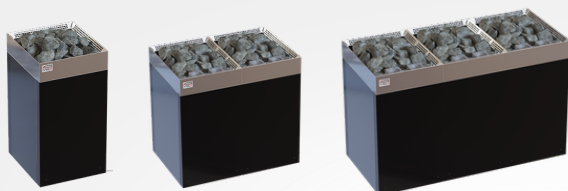

Technical Data

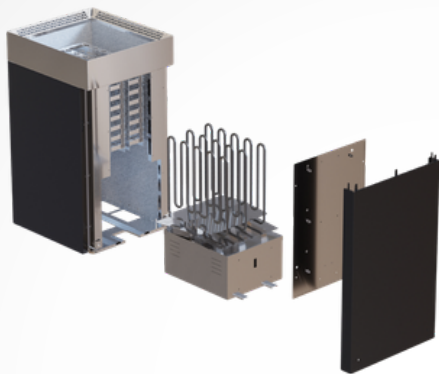

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements

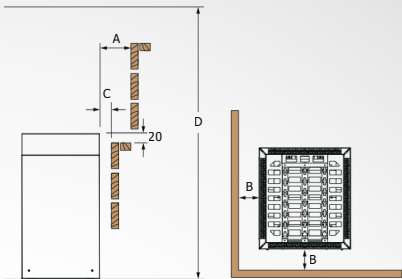

Nordex Pro
Connection Kit

The Nordex Pro Connection Kit* is required in order to connect two or more Pros.

*sold separately

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRN-PRO-60NS-BL-Z-C	6,0	5	9	410	370	705	60	separate	50	50	5	1900
NRN-PRO-80NS-BL-Z-C	8,0	8	14	410	370	705	60	separate	80	80	5	1900
NRN-PRO-90NS-BL-Z-C	9,0	8	14	410	370	705	60	separate	80	80	5	1900

Heater Accessories



Nordex Pro Heater Guards
Hemlock (H)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
NRN-PRO-GUARD-W-H	430	470	85



Nordex Pro Combi


Building on the Nordex tradition, the **Nordex Pro Combi** introduces an enhanced design that combines efficient heating with the added comfort of steam. An integrated water tank delivers gentle humidity, while the separated stone and element design enhances durability.

The Nordex Pro Combi's pull-out cassette tray simplifies maintenance, and the model can be paired with up to two additional units for a maximum of 27,0kW + 6,0kW in larger sauna rooms.





Nordex Pro Combi
(NS)

- » Power range: 6,0 – 9,0kW
- » Available controls:
Saunova/Innova (NS)
- » Built-in aroma cups
- » Adjustable legs
- » Separate water tank with 0,8kW
steam generator

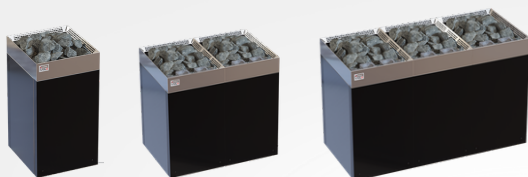

Technical Data

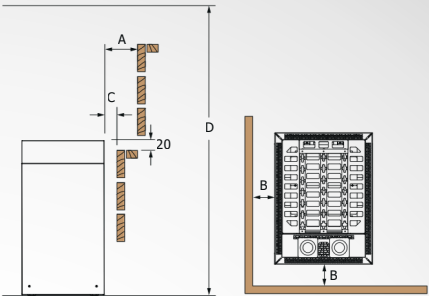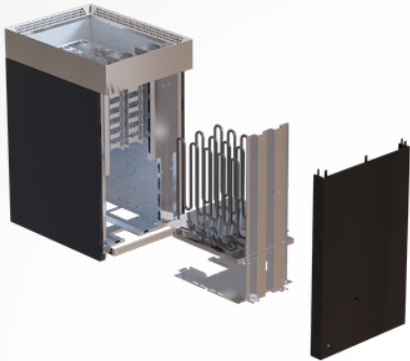

Nordex Pro Combi
Connection Kit

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements

The Nordex Pro Combi Connection Kit* is required in order to connect two or more Pros.
**sold separately*

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX (m³)	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRNC-PRO-60NS-BL-Z-C	6,0	1 x 0,8	5	9	500	370	705	60	separate	80	80	20	1900
NRNC-PRO-80NS-BL-Z-C	8,0	1 x 2,0	7	13	500	370	705	60	separate	80	80	20	1900
NRNC-PRO-90NS-BL-Z-C	9,0	1 x 2,0	8	14	500	370	705	60	separate	80	80	20	1900

Heater Accessories (Optional)



Nordex Pro Combi Heater Guard
Hemlock (H)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH (mm)	HEIGHT
NRNC-PRO-GUARD-W-H	430	560	85



Nordex S

Nordex S is an updated version of Nordex Floor with slimmer design to allow for easier heater placement for different layouts.



Nordex S Black (NS)


Nordex S (NS)

Heater Accessories (Optional)



Wooden Heater Guard Hemlock (H)

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs

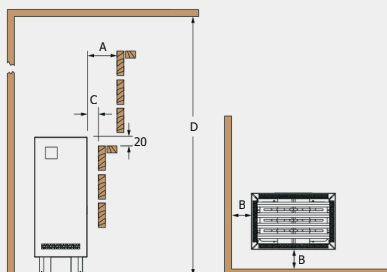

Saunova/Innova (NS)


MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
NRNS-GUARD-W-H	450	322	88

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRNS-60NS-Z-C	6,0	5	9	270	395	710	18 - 25	separate	50	50	5	1900
NRNS-60NS-BL-Z-C	6,0	5	14	270	395	710	18 - 25	separate	50	50	5	1900
NRNS-80NS-Z-C	8,0	7	14	270	395	710	18 - 25	separate	80	80	5	1900
NRNS-80NS-BL-Z-C	8,0	7	13	270	395	710	18 - 25	separate	80	80	5	1900
NRNS-90NS-Z-C	9,0	8	14	270	395	710	18 - 25	separate	80	80	5	1900
NRNS-90NS-BL-Z-C	9,0	8	14	270	395	710	18 - 25	separate	80	80	5	1900



Nordex S Combi

The **Nordex S Combi** is now available in a steamier version. Balance the intense heat with an additional water tank for more steam. Also available with a black metal casing.



- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW or 2,0kW steam generator
- » Built-in aroma cups
- » Adjustable legs

Heater Accessories (Optional)



Wooden Heater Guard
Hemlock (H)

Saunova/Innova (NS)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
NRNSC-GUARD-W-H	450	412	88

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRNSC-60NS-Z-C	6,0	1 x 0,8	5	9	360	395	710	18 - 25	separate	5	50	5	1900
NRNSC-60NS-BL-Z-C	6,0	1 x 0,8	5	9	360	395	710	18 - 25	separate	5	50	5	1900
NRNSC-80NS-Z-C	8,0	1 x 2,0	7	13	360	395	710	18 - 25	separate	5	80	5	1900
NRNSC-80NS-BL-Z-C	8,0	1 x 2,0	7	13	360	395	710	18 - 25	separate	5	80	5	1900
NRNSC-90NS-Z-C	9,0	1 x 2,0	8	14	360	395	710	18 - 25	separate	5	80	5	1900
NRNSC-90NS-BL-Z-C	9,0	1 x 2,0	8	14	360	395	710	18 - 25	separate	5	80	5	1900



Nordex Floor

Nordex floor is a floor-mounted heater with straightforward design and quality performance. It is available with stainless steel or black metal casing.

- » Power range: 9,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs




Nordex Floor
(NS)



Nordex Floor Black
(NS)



Technical Data

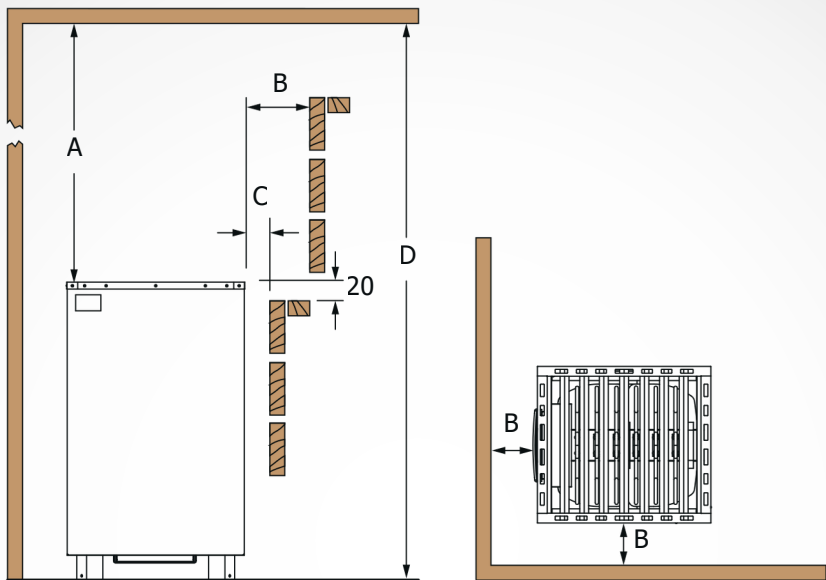

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRNF-90NS-Z NRNF-90NS-BL-Z	9,0	8	14	450	400	670	45	separate	1200	120	50	1900
NRNF-105NS-Z NRNF-105NS-BL-Z	10,5	9	15	450	400	670	45	separate	1200	120	60	1900
NRNF-120NS-Z NRNF-120NS-BL-Z	12,0	10	18	450	400	670	45	separate	1400	130	70	2100
NRNF-150NS-Z NRNF-150NS-BL-Z	15,0	13	23	595	400	670	55	separate	1400	160	100	2100
NRNF-180NS-Z NRNF-180NS-BL-Z	18,0	17	29	595	400	670	55	separate	1400	160	100	2100
NRNF-180NS-V12-Z NRNF-180NS-BL-V12-Z	18,0	18	30	740	400	670	75	separate	1400	160	100	2100
NRNF-210NS-V12-Z NRNF-210NS-BL-V12-Z	21,0	22	35	740	400	670	75	separate	1400	160	100	2100
NRNF-240NS-V12-Z NRNF-240NS-BL-V12-Z	24,0	26	42	740	400	670	75	separate	1400	160	100	2100



Helius

Helius with its slim shape gives the user increased flexibility in terms of heater placement. This "hidden" heater can be installed behind the benches using a wall divider, which effectively renders the heater invisible to the user. Once water is poured to the water basin that remains visible, the water is then transported into the heater via a hose, heating up the room. The model also requires a much shorter than usual safety distance (min. 5mm), by adding a separate Helius hood, the safety distance can be made almost minimal.

With its advanced airflow design, the Helius uses fewer stones, which leads more airflow and better heating efficiency.



**Helius
(NS)**

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate soapstone water basin with hose
- » Optional heater guard and hood


Technical Data

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
HES-45NS-G-P-C	4,5	3	6	230	860	655	17	separate
HES-60NS-G-P-C	6,0	5	9	230	860	655	17	separate
HES-75NS-G-P-C	7,5	7	13	230	860	655	17	separate
HES-90NS-G-P-C	9,0	8	14	230	860	655	17	separate

Other features:

- » Can be installed as floorstanding or wall-mounted
- » Heater stones are not in contact with the heating elements
- » Water accessory (funnel, hose) included for wall installation with a divider
- » Can fit 17kg of stones
- » Catch pan included
- » Adjustable legs

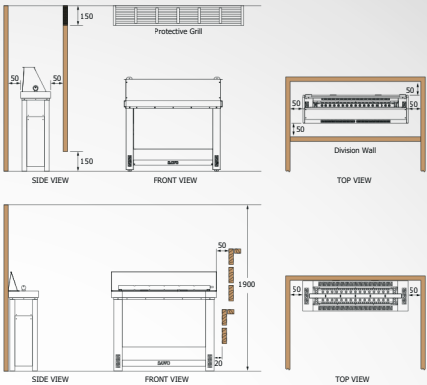

Helius with Hood

- » Maintain a small space for a wall divider and recess area in order to place the heater behind or below the benches.



Heater Accessories (Optional)

Helius Hood



Helius
Stainless Steel

Helius Heater Guard



Wooden Heater Guard
Hemlock (H)

MODEL	SIZE OF HOOD		
	LENGTH	WIDTH	HEIGHT
HP68-008	85	840	290

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
HES-GUARD-W-H	280	910	90



NEW!

Helius Mini

Helius Mini comes with a hood that is necessary when used as a hidden heater. It delivers the same innovation as the Helius in a more compact form. Discreetly installed behind the benches, it stays completely out of sight while advanced airflow ensures efficient, even heat with fewer stones and minimal safety distance. Powerful performance thoughtfully designed for smaller spaces.




Helius Mini
(NS)

- » Power range: 2,0 – 3,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water basin with hose
- » Optional hood

Technical Data

Saunova/Innova (NS)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL
		MIN	MAX	LENGTH	WIDTH (mm)	HEIGHT		
HES-MN-20NS-Z	2,0	1,5	2,5	190	480	480	17	separate
HES-MN-27NS-Z	2,7	2,0	3,5	190	480	480	17	separate
HES-MN-30NS-Z	3,0	2,0	4,0	190	480	480	17	separate

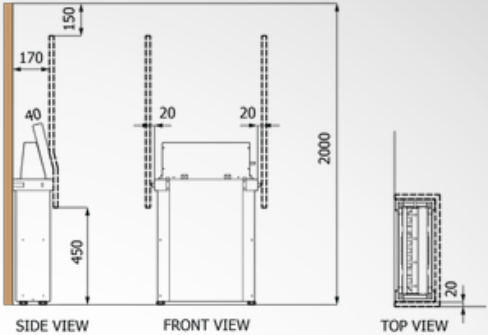

Other features:

- » Can be installed as floorstanding or wall-mounted
- » Heater stones are not in contact with the heating elements
- » Water accessory (funnel, hose) included for wall installation with a divider
- » Can fit 17kg of stones
- » Catch pan included
- » Adjustable legs

Maintain a small space for a wall divider and recess area in order to place the heater behind or below the benches.



Heater Accessories



Helius Mini Hood (optional)



MODEL	SIZE OF HOOD		
	LENGTH	WIDTH	HEIGHT
HP68-009	130	420	190



Taurus D

Taurus D revolutionizes the standard sauna heater by having two or more power options in the same heater. The heater is designed for industrial use, spas, and both public and private pools.

The Taurus D features an advanced sensory system that detects heating element malfunctions early. The stone container keeps the sauna stones apart from the heating elements, increasing the lifespan of the elements. Also, the heater features a cassette pull-out tray that makes any maintenance function simple, whether replacing the stones or the elements. This design reduces downtime and operational costs while ensuring long-term performance.



Taurus D
(NS)


- » Power range: 9,0 – 36,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs
- » Optional heater guard




Technical Data




Taurus D
(NS)

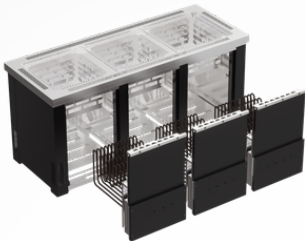

TRD-270/300/330/360NS-G-P

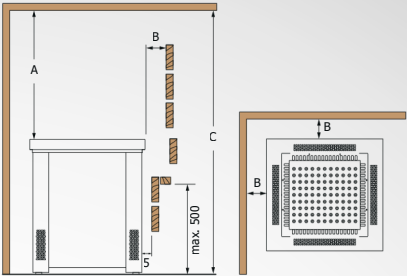

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements.

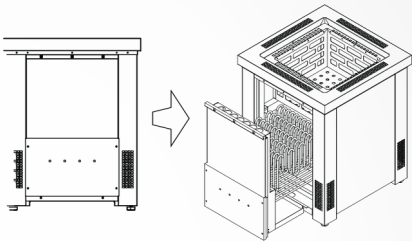

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C
TRD-90/120NS-G-P	9,0 12,0	8	18	555	555	690	50	separate	1210	5/*50	1900
TRD-150/180NS-G-P	15,0 18,0	13	29	555	705	690	65 - 75	separate	1410	5/*50	2100
TRD-180/210/240NS-G-P	18,0 21,0 24,0	18	42	555	970	690	90-100	separate	1410	5/*50	2100
TRD-270/300/330/360NS-G-P	27,0 30,0 33,0 36,0	32	75	555	1385	690	150	separate	1410	5/*50	2100

*For commercial use

Heater Accessories (Optional)

Taurus D Heater Guards



Wood
Hemlock (H)

Heater Guard Rails



MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TAU-GUARD-W9-H	105	555	135

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TAU-GUARD-W12-H	105	705	135



Taurus D Combi

Thanks to the **Taurus D Combi**, the wellness experience is now even easier to personalize. The heater combines a steamer with the Taurus D innovation: two or more heating elements options.

With the Taurus D Combi, bathers can enjoy a traditional or a steam sauna experience. It comes with a scent basin, so the user can rejuvenate in therapeutic steam infused with their favorite essential oils and fragrances.

Using the heater is as hassle-free as it gets. It features a water level detection system that signals when the water level is low, similarly to other Combi heaters. The heater's auto-refill feature can also be activated for maximum convenience.






Taurus D Combi
(NS)

- » Power range: 9,0 – 36,0kW
- » Available controls: Saunova/Innova (NS)
- » Black steel casing
- » Automatic shut-off in case of overheating
- » Built-in aroma cups
- » Adjustable legs
- » Optional heater guard
- » Optional auto refill for automatically filled water tank



Technical Data

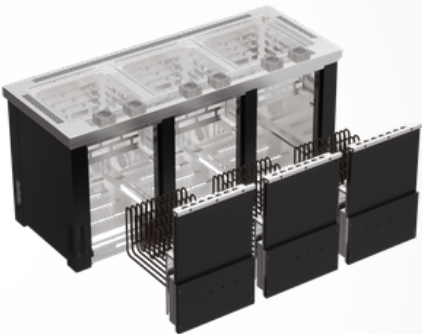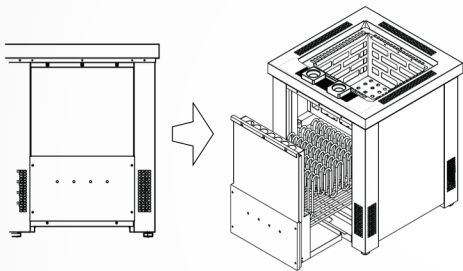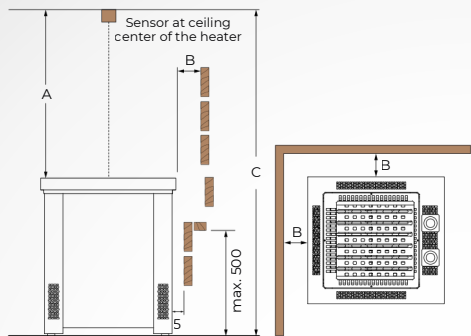

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements.

TRDC-270/300/330/360NS-G-P

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES		
			MIN	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C
TRDC-90/120NS-G-P	9,0 12,0	1 X 2,0	8	18	555	555	690	50	separate	1210	5/*50	1900
TRDC-150/180NS-G-P	15,0 18,0	1 X 2,0	13	29	555	705	690	65-75	separate	1410	5/*50	2100
TRDC-180/210/240NS-G-P	18,0 21,0 24,0	2 X 2,0	18	42	555	970	690	90-100	separate	1410	5/*50	2100
TRDC-270/300/330/360NS-G-P	27,0 30,0 33,0 36,0	3 X 2,0	32	75	555	1385	690	150	separate	1410	5/*50	2100

Savonia

Savonia models are designed to withstand extreme heat with the least amount of time spent on overall care and maintenance. They can also handle a large amount of stones for a smoother, lower temperature sauna experience. The heaters come in two versions, regular and cool-to-touch fibercoating. Both versions have adjustable legs that keep the heater level on the floor.




- » Power range: 9,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs



Savonia
Fibercoated
(NS)



Savonia
(NS)

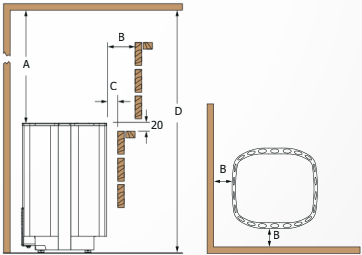

Technical Data

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SAV-90NS-Z SAV-90NS-Z-F	9,0	8	14	440	420	655	50-60	separate	1200	110	50	1900
SAV-105NS-Z SAV-105NS-Z-F	10,5	9	15	440	420	655	50-60	separate	1200	120	60	1900
SAV-120NS-Z SAV-120NS-Z-F	12,0	10	18	440	420	655	50-60	separate	1400	130	70	2100
SAV-150NS-Z SAV-150NS-Z-F	15,0	13	23	590	420	655	60-75	separate	1400	160	100	2100
SAV-180NS-Z SAV-180NS-Z-F	18,0	17	29	590	420	655	60-75	separate	1400	160	100	2100
SAV-180NS-V12-Z SAV-180NS-V12-Z-F	18,0	18	30	740	420	655	80-100	separate	1400	160	100	2100
SAV-210NS-V12-Z SAV-210NS-V12-Z-F	21,0	22	35	740	420	655	80-100	separate	1400	160	100	2100
SAV-240NS-V12-Z SAV-240NS-V12-Z-F	24,0	26	42	740	420	655	80-100	separate	1400	160	100	2100

Savonia Combi

Savonia Combi offers the best of both worlds: the heat of a Savonia and a water tank for more steam and humidity. It is available with cool-to-touch fiber coating and an auto-refill function for the water tank.

- » Power range: 9,0 – 18,0kW
- » Available controls: Saunova/Innova (NS)
- » Built-in aroma cups
- » Separate water tank with 1,0kW or 2,0kW steam generator
- » Adjustable legs
- » Optional: auto-refill function for automatically refilling the water tank




Savonia Combi
Fibercoated
(NS)



Savonia Combi
(NS)

Technical Data

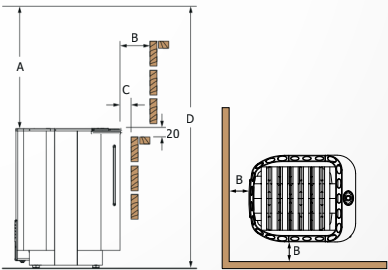

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SAVC-90NS-Z SAVC-90NS-P-F	9,0	1 x 2,0	8	14	510	420	655	40-50	separate	1200	110	50	1900
SAVC-105NS-Z SAVC-105NS-P-F	10,5	1 x 2,0	9	15	510	420	655	40-50	separate	1200	120	60	1900
SAVC-120NS-Z SAVC-120NS-P-F	12,0	1 x 2,0	10	18	510	420	655	40-50	separate	1400	130	70	2100
SAVC-150NS-Z SAVC-150NS-P-F	15,0	1 x 2,0	13	23	715	420	655	40-50	separate	1400	160	100	2100
SAVC-180NS-Z SAVC-180NS-P-F	18,0	1 x 2,0	17	29	715	420	655	40-50	separate	1400	160	100	2100



SAuna WORld



sawo.com



SAWO Sauna



Sawo Inc.