



TOWER

SERIES



SAuna WORld

 sawo.com

   SAWO Sauna

 Sawo Inc.



SAWO 30 Round

SAWO30 Round is a magnificent-looking heater that can be placed perfectly in the middle of the sauna or embedded into benches.

The large amount of stones in the tall sleek body creates a rich, steam-infused atmosphere with an ideal combination of steam and humidity.

- » Power range: 4,5 – 24,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS) and Built-in (NB)
- » Casing: stainless steel or black steel
- » Easier loading of stones with separating middle part
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integrated collar



Stainless Series
NB, NS, Ni2



Black Stainless Series
NB, NS, Ni2

Technical Data





SAWO30 Round (Ni2) SAWO30 Round Black (Ni2)



SAWO30 Round (NS) SAWO30 Round Black (NS)



SAWO30 Round (NB) SAWO30 Round Black (NB)

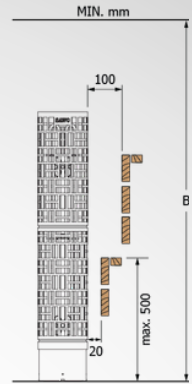

Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NI2-P-C SW3-45NI2-BL-P-C	4,5	3	6		245	245	1305	70	60	Saunova	100	1900
SW3-60NI2-P-C SW3-60NI2-BL-P-C	6,0	5	8		245	245	1305	70	60	Saunova	100	1900
SW3-90NI2-P-C SW3-90NI2-BL-P-C	9,0	8	15		345	345	1305	160	100	Saunova	100	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NB-P-C SW3-45NB-BL-P-C	4,5	3	6		245	245	1305	70	60	separate	100	1900
SW3-60NB-P-C SW3-60NB-BL-P-C	6,0	5	8		245	245	1305	70	60	separate	100	1900
SW3-90NB-P-C SW3-90NB-BL-P-C	9,0	8	15		345	345	1305	160	100	separate	100	1900
SW3-120NS-P-C SW3-120NS-BL-P-C	12,0	11	18		345	345	1305	160	100	separate	100	2100
SW3-180NS-P-C SW3-180NS-BL-P-C	18,0	18	30		515	515	1305	360	220	separate	100	2300
SW3-210NS-P-C SW3-210NS-BL-P-C	21,0	22	35		515	515	1305	360	220	separate	100	2300
SW3-240NS-P-C SW3-240NS-BL-P-C	24,0	24	40		515	515	1305	360	220	separate	100	2300

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NB-P-C SW3-45NB-BL-P-C	4,5	3	6		245	245	1305	70	60	built-in (8+4h)	100	1900
SW3-60NB-P-C SW3-60NB-BL-P-C	6,0	5	8		245	245	1305	70	60	built-in (8+4h)	100	1900
SW3-90NB-P-C SW3-90NB-BL-P-C	9,0	8	15		345	345	1305	160	100	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Round



Stainless



Wooden
Hemlock (H)



Soapstone



Wooden
Hemlock (H)

Heater Guards for Round

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST2	460	460	45
TH-COLLAR-ST6	640	640	45
TH-COLLAR-ST12	820	820	45

MODEL	SIZE OF COLLAR		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W2-H	440	440	45
TH-COLLAR-W6-H	540	540	45
TH-COLLAR-W12-H	685	685	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S2	510	510	45
TH-COLLAR-S6	620	620	45
TH-COLLAR-S12	790	790	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
SW-GUARD-W2-H	510	510	90
SW-GUARD-W6-H	620	620	90
SW-GUARD-W12-H	790	790	90

HEATERS
SW3
SW6
SW12



SAWO30

Wall

SAWO30 Wall is perfect for saving space while being very easy on the eyes.

The large amount of stones in the tall sleek body enables rich, steam-infused atmosphere with an ideal combination of steam and humidity.

- » Power range: 4,5 – 24,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS) and Built-in (NB)
- » Casing: stainless steel or black steel
- » Easier loading of stones with separating middle part
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integrated collar



Stainless Series
NB, NS, Ni2



Black Stainless Series
NB, NS, Ni2

Technical Data



SAWO30 Wall (Ni2)

SAWO30 Wall Black (Ni2)




SAWO30 Wall (NS)

SAWO30 Wall Black (NS)



SAWO30 Wall (NB)

SAWO30 Wall Black (NB)



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone spacer		A	B
SW3-45Ni2-WL-P-C I SW3-45Ni2-WL-BL-P-C	4,5	3	6	230	385	1395	70	60	Saunova	100	1900
SW3-60Ni2-WL-P-C I SW3-60Ni2-WL-BL-P-C	6,0	5	8	230	385	1395	70	60	Saunova	100	1900
SW3-60Ni2-WL-P-C I SW3-60Ni2-WL-BL-P-C	9,0	8	15	250	475	1395	160	100	Saunova	100	1900

Saunova/Innova(NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NS-WL-P-C I SW3-45NS-WL-BL-P-C	4,5	3	6	*210	390	1375	70	60	separate	100	1900
SW3-60NS-WL-P-C I SW3-60NS-WL-BL-P-C	6,0	5	8	*210	390	1375	70	60	separate	100	1900
SW3-90NS-WL-P-C I SW3-90NS-WL-BL-P-C	9,0	8	15	*290	540	1375	160	100	separate	100	1900
SW3-120NS-WL-P-C I SW3-120NS-WL-BL-P-C	12,0	11	18	*290	540	1375	160	100	separate	100	2100
SW3-180NS-WL-P-C I SW3-180NS-WL-BL-P-C	18,0	18	30	*430	780	1375	250	165	separate	100	2300
SW3-210NS-WL-P-C I SW3-210NS-WL-BL-P-C	21,0	22	35	*430	780	1375	250	165	separate	100	2300
SW3-240NS-WL-P-C I SW3-240NS-WL-BL-P-C	24,0	24	40	*430	780	1375	250	165	separate	100	2300

*Depth when installed to the wall.

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone spacer		A	B
SW3-45NB-WL-P-C I SW3-45NB-WL-BL-P-C	4,5	3	6	*230	385	1395	70	60	built-in (8+4h)	100	1900
SW3-60NB-WL-P-C I SW3-60NB-WL-BL-P-C	6,0	5	8	*230	385	1395	70	60	built-in (8+4h)	100	1900
SW3-90NB-WL-P-C I SW3-90NB-WL-BL-P-C	9,0	8	15	*230	475	1395	160	100	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Wall



Stainless



Wooden
Hemlock (H)



Soapstone



Wooden
Hemlock (H)

Heater Guards for Wall

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST2-WL	355	650	45
TH-COLLAR-ST6-WL	445	830	45
TH-COLLAR-ST12-WL	535	1010	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W2-WL-H	345	630	45
TH-COLLAR-W6-WL-H	425	790	45
TH-COLLAR-W12-WL-H	545	1030	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S2-WL	345	635	45
TH-COLLAR-S6-WL	425	795	45
TH-COLLAR-S12-WL	545	1035	45

MODEL	SIZE OF GUARD RAIL			HEATERS
	LENGTH	WIDTH	HEIGHT	
SW-GUARD-W2-WL-H	335	615	90	SW3
SW-GUARD-W6-WL-H	410	795	90	SW6
				SW12



SAWO30

Corner

SAWO30 Corner is designed for making the most out of limited sauna space without having to compromise. The large amount of stones in the tall sleek body creates a rich, steam-infused atmosphere with an ideal combination of steam and humidity.

- » Power range: 4,5 – 12,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS) and Built-in (NB)
- » Casing: stainless steel or black steel
- » Easier loading of stones with separating middle part
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integrated collar



Stainless Series
NB, NS, Ni2




Black Stainless Series
NB, NS, Ni2

Technical Data



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45Ni2-CNR-P-C SW3-45Ni2-CNR-BL-P-C	4,5	3	6	*300	300	1380	70	45	Saunova	100	1900
SW3-60Ni2-CNR-P-C SW3-60Ni2-CNR-BL-P-C	6,0	5	8	*300	300	1380	70	45	Saunova	100	1900
SW3-90Ni2-CNR-P-C SW3-90Ni2-CNR-BL-P-C	9,0	8	15	*415	415	1380	150	80	Saunova	100	1900



Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
SW3-45NS-CNR-P-C SW3-45NS-CNR-BL-P-C	4,5	3	6	*300	300	1380	70	45	separate	100	1900
SW3-60NS-CNR-P-C SW3-60NS-CNR-BL-P-C	6,0	5	8	*300	300	1380	70	45	separate	100	1900
SW3-90NS-CNR-P-C SW3-90NS-CNR-BL-P-C	9,0	8	15	*415	415	1380	105	80	separate	100	1900
SW3-120NS-CNR-P SW3-120NS-CNR-BL-P	12,0	11	18	*415	415	1380	105	80	separate	100	2100

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With stone spacer		A	B
SW3-45NB-CNR-P-C SW3-45NB-CNR-BL-P-C	4,5	3	6	*300	300	1380	70	45	built-in (8+4h)	100	1900
SW3-60NB-CNR-P-C SW3-60NB-CNR-BL-P-C	6,0	5	8	*300	300	1380	70	45	built-in (8+4h)	100	1900
SW3-90NB-CNR-P-C SW3-90NB-CNR-BL-P-C	9,0	8	15	*415	415	1380	105	80	built-in (8+4h)	100	1900

*Depth when installed to the wall.



Heater Accessories (Optional)

Integration Collars for Corner



Stainless steel



Wooden Hemlock (H)



Soapstone

Heater Guards for Corner



Wooden Hemlock (H)


MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST2-CNR	220	670	45
TH-COLLAR-ST6-CNR	245	795	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W2-CNR-H	200	500	45
TH-COLLAR-W6-CNR-H	235	755	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S4-CNR	425	425	45
TH-COLLAR-S6-CNR	535	535	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
SW-GUARD-W2-CNR-H	210	580	90
SW-GUARD-W6-CNR-H	245	755	90

HEATERS
SW3
SW6

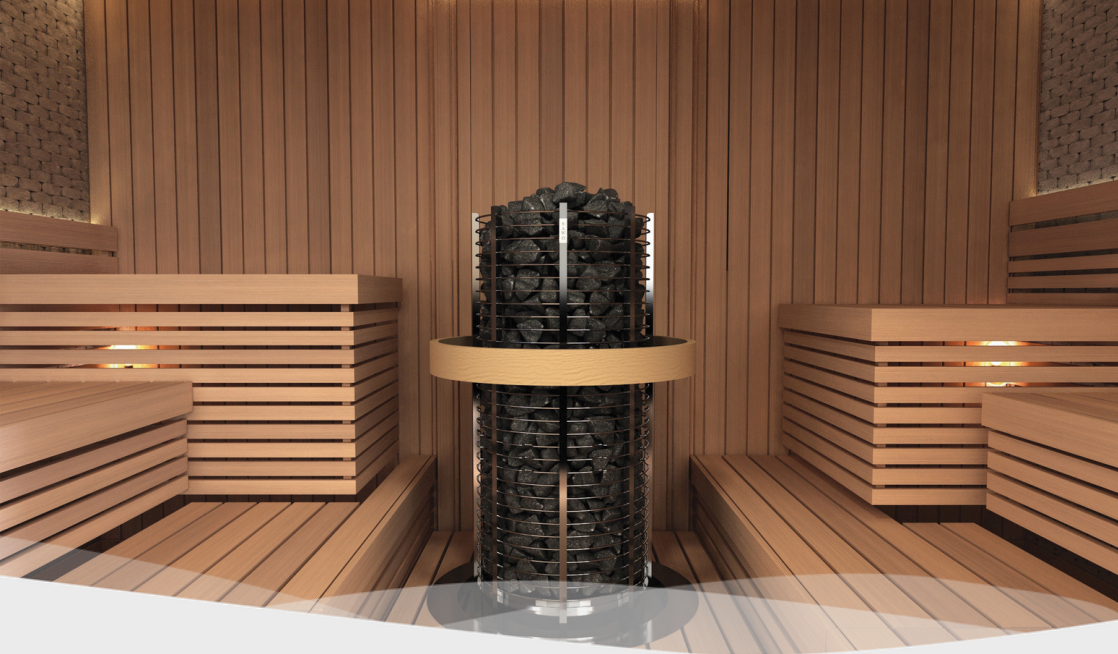

TOWER

Round

Tower Round is a timelessly elegant heater that releases long-lasting mild, steady, and humid heat.


The Round model can be placed perfectly in the middle of the sauna or embedded into benches

- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova (Ni2), Innova (Ni), Saunova/Innova (NS) and Built-in (NB)
- » Casing: Stainless steel
- » Moving steel rings for the replacement of broken stones
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series
NB, NS, Ni2, Ni

Technical Data



Saunova (Ni2) and Innova (Ni)



HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30Ni2-P-C	3,0	2	4	260	260	1300		70	60	Saunova	100	1900
TH3-35Ni2-P-C	3,5	3	6	260	260	1300		70	60	Saunova	100	1900
TH3-45Ni2-P-C	4,5	3	6	260	260	1300		70	60	Saunova	100	1900
TH3-60Ni2-P-C	6,0	5	8	260	260	1300		70	60	Saunova	150	1900
TH4-60Ni2-P-C	6,0	5	9	315	315	1300		105	90	Saunova	150	1900
TH5-80Ni2-P-C	8,0	8	14	315	315	1300		105	90	Saunova	150	1900
TH5-90Ni2-P-C	9,0	8	14	315	315	1300		105	90	Saunova	150	1900
TH6-80Ni2-P-C	8,0	7	14	365	365	1300		160	100	Saunova	150	1900
TH6-90Ni2-P-C	9,0	8	15	365	365	1300		160	100	Saunova	150	1900
TH6-105Ni-P	10,5	9	16	365	365	1300		160	100	Innova	150	1900
TH6-120Ni-P	12,0	11	18	365	365	1300		160	100	Innova	200	2100
TH9-105Ni-P	10,5	10	16	450	450	1300		230	165	Innova	150	2100
TH9-120Ni-P	12,0	11	20	450	450	1300		230	165	Innova	150	2100
TH9-150Ni-P	15,0	14	25	450	450	1300		230	165	Innova	200	2100
TH12-150Ni-P	15,0	15	26	545	545	1300		360	220	Innova	200	2300
TH12-180Ni-P	18,0	18	30	545	545	1300		360	220	Innova	200	2300
TH12-210Ni-P	21,0	22	35	545	545	1300		360	220	Innova	200	2300
TH12-240Ni-P	24,0	24	40	545	545	1300		360	220	Innova	200	2300



Built-in (NB) and Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30NB-P NS-P	3,0	2	4	260	260	1300		70	60	separate	100 150	1900
TH3-35NB-P-C NS-P-C	3,5	3	6	260	260	1300		70	60	built-in (8+4h) separate	150 100	1900
TH3-45NB-P-C NS-P-C	4,5	3	6	260	260	1300		70	60	built-in (8+4h) separate	150 100	1900
TH3-60NB-P-C NS-P-C	6,0	5	8	260	260	1300		70	60	built-in (8+4h) separate	150 100	1900
TH4-60NB-P-C NS-P-C	6,0	5	9	315	315	1300		105	90	built-in (8+4h) separate	150 100	1900
TH5-80NB-P-C NS-P-C	8,0	7	13	315	315	1300		105	90	built-in (8+4h) separate	100 100	1900
TH5-90NS-P-C	9,0	8	14	315	315	1300		105	90	separate	150	1900
TH6-80NB-P-C NS-P-C	8,0	7	14	365	365	1300		160	100	built-in (8+4h) separate	100 100	1900
TH6-90NB-P-C NS-P-C	9,0	8	15	365	365	1300		160	100	built-in (8+4h) separate	100 100	1900
TH6-105NS-P	10,5	9	16	365	365	1300		160	100	separate	150	1900
TH6-120NS-P	12,0	11	18	365	365	1300		160	100	separate	200	2100
TH9-105NS-P	10,5	10	16	450	450	1300		230	165	separate	150	2100
TH9-120NS-P	12,0	11	20	450	450	1300		230	165	separate	150	2100
TH9-150NS-P	15,0	14	25	450	450	1300		230	165	separate	200	2100
TH9-180NS-P	18,0	18	28	450	450	1300		230	165	separate	200	2100
TH12-150NS-P	15,0	15	26	545	545	1300		360	220	separate	200	2300
TH12-180NS-P	18,0	18	30	545	545	1300		360	220	separate	200	2300
TH12-210NS-P	21,0	22	35	545	545	1300		360	220	separate	200	2300
TH12-240NS-P	24,0	24	40	545	545	1300		360	220	separate	200	2300

Heater Accessories (Optional)

Integration Collars for Round



Stainless steel
(for TH4 and TH5)



Stainless steel



Wooden
Hemlock (H)



Soapstone



Wooden
Hemlock (H)

Heater Guards for Round

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH-COLLAR-V2-ST4	420	420	105	

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH-COLLAR-ST2	460	460	45	

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH-COLLAR-W2-H	440	440	45	

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH-COLLAR-S2	507	507	45	

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH-GUARD-W2-H	510	510	45	

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH2 TH3				

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH-COLLAR-ST4	540	540	45	
TH-COLLAR-ST6	640	640	45	
TH-COLLAR-ST9	720	720	45	
TH-COLLAR-ST12	820	820	45	

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH-COLLAR-W4-H	485	485	45	
TH-COLLAR-W6-H	540	540	45	
TH-COLLAR-W9-H	560	560	45	
TH-COLLAR-W12-H	685	685	45	

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH-COLLAR-S4	560	560	45	
TH-COLLAR-S6	620	620	45	
TH-COLLAR-S9	690	690	45	
TH-COLLAR-S12	790	790	45	

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH-GUARD-W4-H	560	560	45	
TH-GUARD-W6-H	620	620	45	
TH-GUARD-W9-H	690	690	45	
TH-GUARD-W12-H	790	790	45	

MODEL	LENGTH	SIZE OF GUARD RAIL	WIDTH	HEIGHT
TH4 TH5				
TH6				
TH9				
TH12				



TOWER Wall

Tower Wall is a timelessly elegant heater that releases long-lasting mild, steady and humid heat. The Wall model is a wonderful space-saver while still being the show-stopper of the sauna.


To increase the heater's power output to over 24,0kW, two Wall heaters can be linked together for an output of up to 48,0kW.

- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova (Ni2), Innova (Ni), Saunova/Innova (NS) and Built-in (NB)
- » Casing: Stainless steel
- » Moving rings for replacement of broken stones
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series
NB, NS, Ni2, Ni

Technical Data



Saunova (Ni2) and Innova (Ni)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
		(m³)		(mm)							
TH2-30NI2-WL-P-C	3,0	2	4	*230	385	1395	70	60	Saunova	100	1900
TH3-35NI2-WL-P-C	3,5	3	5	*230	385	1395	70	60	Saunova	100	1900
TH3-45NI2-WL-P-C	4,5	3	5	*230	385	1395	70	60	Saunova	100	1900
TH3-60NI2-WL-P-C	6,0	5	8	*230	385	1395	70	60	Saunova	100	1900
TH4-60NI2-WL-P-C	6,0	5	9	*250	475	1395	105	90	Saunova	100	1900
TH5-80NI2-WL-P-C	8,0	8	14	*250	475	1395	105	90	Saunova	100	1900
TH5-90NI2-WL-P-C	9,0	8	14	*250	475	1395	105	90	Saunova	100	1900
TH6-80NI2-WL-P-C	8,0	7	14	*320	550	1395	160	100	Saunova	100	1900
TH6-90NI2-WL-P-C	9,0	8	15	*320	550	1395	160	100	Saunova	100	1900
TH6-105NI-WL-P	10,5	9	16	*320	550	1395	160	100	Innova	100	1900
TH6-120NI-WL-P	12,0	11	18	*320	550	1395	160	100	Innova	100	2100
TH9-105NI-WL-P	10,5	10	16	*355	650	1395	230	165	Innova	100	2100
TH9-120NI-WL-P	12,0	11	20	*355	650	1395	230	165	Innova	100	2100
TH9-150NI-WL-P	15,0	14	25	*355	650	1395	230	165	Innova	100	2100
TH12-150NI-WL-P	15,0	15	26	*425	790	1395	360	220	Innova	100	2300
TH12-180NI-WL-P	18,0	18	30	*425	790	1395	360	220	Innova	100	2300
TH12-210NI-WL-P	21,0	22	35	*425	790	1395	360	220	Innova	100	2300
TH12-240NI-WL-P	24,0	24	40	*425	790	1395	360	220	Innova	100	2300



Tower Wall
(Ni2)

Tower Wall
(Ni)

Built-in (NB) and Saunova/Innova (NS)

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
		(m³)		(mm)							
TH2-30-NS-WL-P	3,0	2	4	*230	385	1395	70	60	built-in (8+4h) separate	100	1900
TH3-35-NB NS-WL-P-C	3,5	3	6	*230	385	1395	70	60	built-in (8+4h) separate	100	1900
TH3-45-NB NS-WL-P-C	4,5	3	6	*230	385	1395	70	60	built-in (8+4h) separate	100	1900
TH3-60-NB NS-WL-P-C	6,0	5	8	*230	385	1395	70	60	built-in (8+4h) separate	100	1900
TH4-60-NB NS-WL-P-C	6,0	5	9	*250	475	1395	105	90	built-in (8+4h) separate	100	1900
TH5-80-NB NS-WL-P-C	8,0	7	13	*250	475	1395	105	90	built-in (8+4h) separate	100	1900
TH5-90NS-WL-P-C	9,0	8	14	*250	475	1395	105	90	separate	100	1900
TH6-80 NB NS-WL-P-C	8,0	7	14	*300	540	1395	160	100	built-in (8+4h) separate	100	1900
TH6-90 NB NS-WL-P-C	9,0	8	15	*300	540	1395	160	100	built-in (8+4h) separate	100	1900
TH6-105NS-WL-P	10,5	9	16	*300	540	1395	160	100	separate	100	2100
TH6-120NS-WL-P	12,0	11	18	*300	540	1395	160	100	separate	100	2100
TH9-105NS-WL-P	10,5	10	16	*355	650	1395	230	165	separate	100	2100
TH9-120NS-WL-P	12,0	11	20	*355	650	1395	230	165	separate	100	2100
TH9-150NS-WL-P	15,0	14	25	*355	650	1395	230	165	separate	100	2100
TH9-180NS-WL-P	18,0	18	28	*355	650	1395	230	165	separate	100	2300
TH12-150NS-WL-P	15,0	15	26	*425	790	1395	360	220	separate	100	2300
TH12-180NS-WL-P	18,0	18	30	*425	790	1395	360	220	separate	100	2300
TH12-210NS-WL-P	21,0	22	35	*425	790	1395	360	220	separate	100	2300
TH12-240NS-WL-P	24,0	24	40	*425	790	1395	360	220	separate	100	2300

*Depth when installed to the wall.

Heater Accessories (Optional)

Integration Collars for Wall

Heater Guards for Wall



Stainless Steel



Wooden
Hemlock (H)



Soapstone



Wooden
Hemlock (H)

MODEL	SIZE OF GUARD RAIL	
	LENGTH	WIDTH
TH-COLLAR-ST2-WL	355	650
TH-COLLAR-ST4-WL	380	700
TH-COLLAR-ST6-WL	445	830
TH-COLLAR-ST9-WL	470	880
TH-COLLAR-ST12-WL	535	1010

MODEL	SIZE OF GUARD RAIL	
	LENGTH	WIDTH
TH-COLLAR-W2-WL-H	345	530
TH-COLLAR-W4-WL-H	385	715
TH-COLLAR-W6-WL-H	425	790
TH-COLLAR-W9-WL-H	480	890
TH-COLLAR-W12-WL-H	545	1030

MODEL	SIZE OF GUARD RAIL	
	LENGTH	WIDTH
TH-COLLAR-S2-WL	345	635
TH-COLLAR-S4-WL	390	720
TH-COLLAR-S6-WL	425	795
TH-COLLAR-S9-WL	475	895
TH-COLLAR-S12-WL	545	1035

MODEL	SIZE OF GUARD RAIL	
	LENGTH	WIDTH
TH-GUARD-W2-WL-D A H	355	545
TH-GUARD-W4-WL-D A H	725	395
TH-GUARD-W6-WL-D A H	435	800
TH-GUARD-W9-WL-D A H	485	900
TH-GUARD-W12-WL-D A H	555	1040

TH2 TH3
TH4 TH5
TH6
TH9
TH12



TOWER

Corner

Tower Corner is specifically designed to fit into tight corners. It makes the most out of the sauna layout without sacrificing heat and style.


The Tower Corner will ensure a gentle, soothing warmth for a truly relaxing experience

- » Power range: 3,0 – 12,0kW
- » Available controls: Saunova (Ni2), Innova (Ni), Saunova/Innova (NS) and Built-in (NB)
- » Casing: Stainless steel
- » Moving upper part for replacement of broken stones
- » Removable stone spacer: choose between faster heating time and hotter heat or slower, milder heat
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series
NB, NS, Ni2, Ni

Technical Data



Saunova (Ni2) and Innova (Ni)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30Ni2-CNR-P-C	3,0	2	4	300	*300	1380	70	45	Saunova	100	1900
TH3-35Ni2-CNR-P-C	3,5	3	6	300	*300	1380	70	45	Saunova	100	1900
TH3-45Ni2-CNR-P-C	4,5	3	6	300	*300	1380	70	45	Saunova	100	1900
TH3-60Ni2-CNR-P-C	6,0	5	8	300	*300	1380	70	45	Saunova	100	1900
TH4-60Ni2-CNR-P-C	6,0	5	9	355	*355	1380	105	70	Saunova	100	1900
TH5-80Ni2-CNR-P-C	8,0	8	14	355	*355	1380	105	70	Saunova	100	1900
TH5-90Ni2-CNR-P-C	9,0	8	14	355	*355	1380	105	70	Saunova	100	1900
TH6-80Ni2-CNR-P	8,0	7	14	415	*415	1380	160	80	Saunova	100	1900
TH6-90Ni2-CNR-P	9,0	8	15	415	*415	1380	160	80	Saunova	100	1900
TH6-105Ni-CNR-P	10,5	9	16	415	*415	1380	160	100	Innova	100	1900
TH6-120Ni-CNR-P	12,0	11	18	415	*415	1380	160	100	Innova	100	2100

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH2-30NB-CNR-P-C	3,0	2	4	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH3-35NB-CNR-P-C	3,5	3	6	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH3-45NB-CNR-P-C	4,5	3	6	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH3-60NB-CNR-P-C	6,0	5	8	300	*300	1380	70	45	built-in (8+4h)	125	1900
TH4-60NB-CNR-P-C	6,0	5	9	355	*355	1380	105	70	built-in (8+4h)	125	1900
TH5-80NB-CNR-P-C	8,0	7	13	355	*355	1380	105	70	built-in (8+4h)	125	1900
TH6-80NB-CNR-P-C	8,0	7	14	415	*415	1380	160	80	built-in (8+4h)	125	1900
TH6-90NB-CNR-P-C	9,0	8	15	415	*415	1380	160	80	built-in (8+4h)	125	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
TH3-35NS-CNR-P-C	3,5	3	6	300	*300	1380	70	45	separate	100	1900
TH3-45NS-CNR-P-C	4,5	3	6	300	*300	1380	70	45	separate	100	1900
TH3-60NS-CNR-P-C	6,0	5	8	300	*300	1380	70	45	separate	100	1900
TH4-60NS-CNR-P-C	6,0	5	9	355	*355	1380	105	70	separate	100	1900
TH5-80NS-CNR-P-C	8,0	7	13	355	*355	1380	105	70	separate	100	1900
TH5-90NS-CNR-P-C	9,0	8	14	355	*355	1380	105	70	separate	100	1900
TH6-80NS-CNR-P-C	8,0	7	14	415	*415	1380	160	80	separate	100	1900
TH6-90NS-CNR-P-C	9,0	8	15	415	*415	1380	160	80	separate	100	1900
TH6-105NS-CNR-P	10,5	9	16	415	*415	1380	160	80	separate	100	1900
TH6-120NS-CNR-P	12,0	11	18	415	*415	1380	160	80	separate	100	2100

*Depth when installed to the wall.

Heater Accessories (Optional)

Integration Collars for Corner

Heater Guards for Corner



Stainless steel



Wooden Hemlock (H)



Soapstone



Wooden Hemlock (H)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST2-CNR	220	670	45
TH-COLLAR-ST4-CNR	235	730	45
TH-COLLAR-ST6-CNR	245	795	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W2-CNR-H	200	600	45
TH-COLLAR-W4-CNR-H	215	670	45
TH-COLLAR-W6-CNR-H	235	755	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S2-CNR	425	425	45
TH-COLLAR-S4-CNR	475	475	45
TH-COLLAR-S6-CNR	535	535	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-GUARD-W2-CNR-H	240	595	90
TH-GUARD-W4-CNR-H	255	670	90
TH-GUARD-W6-CNR-H	270	755	90

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH2 TH3			
TH4 TH5			
TH6			



ARIES

Round

Aries Round is a stylish eye-catcher that delivers consistent heat from top to bottom. It can be placed perfectly in the middle of the sauna or embedded into the benches.

- » Power range: 4,5 – 18,0kW
- » Available controls: Saunova (Ni2), Saunova/ Innova (NS), Built-in (NB)
- » Built-in stone spacer
- » Casing: Stainless steel or black steel
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series

NB, NS, Ni2,



Black Stainless Series

NB, NS, Ni2,

Technical Data



Aries Round (Ni2)

Aries Round Black (Ni2)




Aries Round (NS)

Aries Round Black (NS)



Aries Round (NB)

Aries Round Black (NB)



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45Ni2-P-C ARI3-45Ni2-BL-P-C	4,5	3	6		300	300	930	60	Saunova	100	1900
ARI3-60Ni2-P-C ARI3-60Ni2-BL-P-C	6,0	5	9		300	300	930	60	Saunova	100	1900
ARI3-75Ni2-P-C ARI3-75Ni2-BL-P-C	7,5	7	12		300	300	930	60	Saunova	100	1900
ARI3-90Ni2-P-C ARI3-90Ni2-BL-P-C	9,0	8	13		300	300	930	60	Saunova	100	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NS-P-C ARI3-45NS-BL-P-C	4,5	3	6		300	300	930	60	separate	100	1900
ARI3-60NS-P-C ARI3-60NS-BL-P-C	6,0	5	9		300	300	930	60	separate	100	1900
ARI3-75NS-P-C ARI3-75NS-BL-P-C	7,5	7	12		300	300	930	60	separate	100	1900
ARI3-90NS-P-C ARI3-90NS-BL-P-C	9,0	8	14		300	300	930	60	separate	100	1900
ARI6-90NS-P-C ARI6-90NS-BL-P-C	9,0	8	14		440	440	930	110	separate	100	1900
ARI6-105NS-P ARI6-105NS-BL-P	10,5	9	15		440	440	930	110	separate	100	1900
ARI6-120NS-P ARI6-120NS-BL-P	12,0	10	18		440	440	930	110	separate	100	2100
ARI6-150NS-P ARI6-150NS-BL-P	15,0	13	23		440	440	930	110	separate	100	2100
ARI6-180NS-P ARI6-180NS-BL-P	18,0	15	26		440	440	930	110	separate	125	2100

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NB-P-C ARI3-45NB-BL-P-C	4,5	3	6		300	300	930	60	built-in (8+4h)	100	1900
ARI3-60NB-P-C ARI3-60NB-BL-P-C	6,0	5	9		300	300	930	60	built-in (8+4h)	100	1900
ARI3-75NB-P-C ARI3-75NB-BL-P-C	7,5	7	12		300	300	930	60	built-in (8+4h)	100	1900
ARI3-90NB-P-C ARI3-90NB-BL-P-C	9,0	8	14		300	300	930	60	built-in (8+4h)	100	1900
ARI6-90NB-P-C ARI6-90NB-BL-P-C	9,0	8	14		440	440	930	110	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Round



Stainless steel
(for ARI3)



Stainless steel



Wooden
Hemlock (H)



Soapstone



Wooden
Hemlock (H)

Heater Guards for Round

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-V2-ST4	420	420	105

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST4	540	540	45
TH-COLLAR-ST6	640	540	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W4-H	485	485	45
TH-COLLAR-W6-H	540	540	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S4	560	560	45
TH-COLLAR-S6	620	620	45

MODEL	SIZE OF GUARD RAIL			MODEL
	LENGTH	WIDTH	HEIGHT	
ARI-GUARD-W3-H	570	570	110	TH2 TH3
ARI-GUARD-W3-H	700	700	110	TH4 TH5



ARIES

Wall

Aries Wall is a space-saving wonder that combines practicality and elegance with its sleek design. It is perfect for wall-installation, freeing up valuable space in the sauna.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/ Innova (NS), Built-in (NB)
- » Built-in stone spacer
- » Casing: Stainless steel or black steel
- » Adjustable legs
- » Optional heater guard and integration collar



Stainless Series
NB, NS, Ni2



Black Stainless Series
NB, NS, Ni2

Technical Data



Aries Wall
(Ni2)

Aries Wall Black
(Ni2)




Aries Wall
(NS)

Aries Wall Black
(NS)



Aries Wall
(NB)

Aries Wall Black
(NB)



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45Ni2-WL-P-C ARI3-45Ni2-WL-BL-P-C	4,5	3	6		*250	415	1030	65	Saunova	100	1900
ARI3-60Ni2-WL-P-C ARI3-60Ni2-WL-BL-P-C	6,0	5	9		*250	415	1030	65	Saunova	100	1900
ARI3-75Ni2-WL-P-C ARI3-75Ni2-WL-BL-P-C	7,5	7	13		*250	415	1030	65	Saunova	100	1900
ARI3-90Ni2-WL-P-C ARI3-90Ni2-WL-BL-P-C	9,0	8	14		*250	415	1030	65	Saunova	100	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NS-WL-P-C ARI3-45NS-WL-BL-P-C	4,5	3	6		*250	415	1030	55	separate	100	1900
ARI3-60NS-WL-P-C ARI3-60NS-WL-BL-P-C	6,0	5	9		*250	415	1030	55	separate	100	1900
ARI3-75NS-WL-P-C ARI3-75NS-WL-BL-P-C	7,5	7	13		*250	415	1030	55	separate	100	1900
ARI3-90NS-WL-P-C ARI3-90NS-WL-BL-P-C	9,0	8	14		*250	415	1030	55	separate	100	1900

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NB-WL-P-C ARI3-45NB-WL-BL-P-C	4,5	3	6		*250	415	1030	65	built-in (8+4h)	100	1900
ARI3-60NS-WL-P-C ARI3-60NS-WL-BL-P-C	6,0	5	9		*250	415	1030	65	built-in (8+4h)	100	1900
ARI3-75NS-WL-P-C ARI3-75NS-WL-BL-P-C	7,5	7	13		*250	415	1030	65	built-in (8+4h)	100	1900
ARI3-90NS-WL-P-C ARI3-90NS-WL-BL-P-C	9,0	8	14		*250	415	1030	65	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Wall



Stainless



Wooden
Hemlock (H)



Soapstone



Wooden
Hemlock (H)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST4-WL	380	700	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W4-WL-H	380	715	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S4-WL	390	720	45

MODEL	SIZE OF GUARD RAIL			MODEL
	LENGTH	WIDTH	HEIGHT	
ARJ-GUARD-W3-WL-H	665	380	110	ARI3



ARIES

Corner

Aries Corner makes the most of the sauna layout without settling for anything less than exceptional. The Corner model is designed to fit snugly into tight corners, rendering it perfect for saunas with limited space.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/ Innova (NS), Built-in (NB)
- » Built-in stone spacer
- » Casing: Stainless steel or black steel
- » Adjustable legs
- » Optional heater guard and integration collar




Stainless Series
NB, NS, Ni2, Ni



Black Stainless Series
NB, NS, Ni2, Ni

Technical Data



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45Ni2-CNR-P-C ARI3-45Ni2-CNR-BL-P-C	4,5	3	6	335	*335	1000	65	Saunova	100	1900
ARI3-60Ni2-CNR-P-C ARI3-60Ni2-CNR-BL-P-C	6,0	5	9	335	*335	1000	65	Saunova	100	1900
ARI3-75Ni2-CNR-P-C ARI3-75Ni2-CNR-BL-P-C	7,5	7	13	335	*335	1000	65	Saunova	100	1900
ARI3-90Ni2-CNR-P-C ARI3-90Ni2-CNR-BL-P-C	9,0	8	14	335	*335	1000	65	Saunova	100	1900



Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NS-CNR-P-C ARI3-45NS-CNR-BL-P-C	4,5	3	6	335	*335	1000	65	Saunova	100	1900
ARI3-60NS-CNR-P-C ARI3-60NS-CNR-BL-P-C	6,0	5	9	335	*335	1000	65	Saunova	100	1900
ARI3-75NS-CNR-P-C ARI3-75NS-CNR-BL-P-C	7,5	7	13	335	*335	1000	65	Saunova	100	1900
ARI3-90NS-CNR-P-C ARI3-90NS-CNR-BL-P-C	9,0	8	14	335	*335	1000	65	Saunova	100	1900



Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B
ARI3-45NB-CNR-P-C ARI3-45NB-CNR-BL-P-C	4,5	3	6	335	*335	1000	55	built-in (8+4h)	100	1900
ARI3-60NB-CNR-P-C ARI3-60NB-CNR-BL-P-C	6,0	5	9	335	*335	1000	55	built-in (8+4h)	100	1900
ARI3-75NB-CNR-P-C ARI3-75NB-CNR-BL-P-C	7,5	7	19	335	*335	1000	55	built-in (8+4h)	100	1900
ARI3-90NB-CNR-P-C ARI3-90NB-CNR-BL-P-C	9,0	8	14	335	*335	1000	55	built-in (8+4h)	100	1900

Heater Accessories (Optional)

Integration Collars for Corner



Stainless



Wooden
Hemlock (H)



Soapstone

Heater Guards for Corner



Wooden
Hemlock (H)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-ST4-CNR	235	730	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-W4-CNR-H	215	670	45

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
TH-COLLAR-S4-CNR	475	475	45


MODEL	SIZE OF GUARD RAIL			MODEL
	LENGTH	WIDTH	HEIGHT	
ARI-GUARD-W3-CNR-H	215	535	110	ARI3

CUBOS

Cubos is the ultimate 3-in-1 heater – it can be placed either in the middle, corner or wall of the sauna room. The additional protective cover* allows for wall and/or corner installation.

This modern and versatile heater is truly one of a kind.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS), Built-in (NB)
- » Casing: Stainless steel
- » Built-in stone spacer
- » Adjustable legs
- » Optional heater guard and integration collar

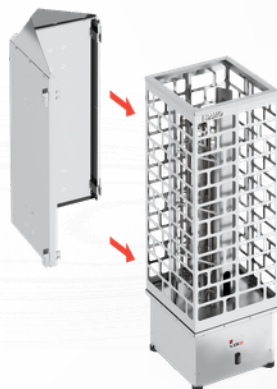


WALL INSTALLATION

The protective cover allows the heater to be installed against the wall, if the sauna is limited in space. The protective cover set for wall installation includes a covering sheet and a reflector that directs heat even to the lowest parts of the sauna room, ensuring that it heats up entirely.

CORNER INSTALLATION

Cubos quickly changes to corner model with a protective cover for corner. Corner installation saves space and allows for different bench designs. The protective cover for corner set includes two pieces of covering sheet and a reflector.


Technical Data




Middle Installation



Wall Installation
with Protective Cover



Corner Installation
with Protective Cover



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM MIN MAX (m³)	SIZE OF HEATER (w/ WALL INSTALLATION) (mm)										STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
			MIDDLE		WALL		CORNER		HEIGHT								
			LENGTH	WIDTH	LENGTH	WIDTH	LENGTH	WIDTH									
															A	AA	B
CUB3-45Ni2-P-C	4,5	3	6	290	290	290	340	340	340	930	70	Saunova	100	100	1900		
CUB3-60Ni2-P-C	6,0	5	9	290	290	290	340	340	340	930	70	Saunova	100	100	1900		
CUB3-75Ni2-P-C	7,5	7	13	290	290	290	340	340	340	930	70	Saunova	100	135	1900		
CUB3-90Ni2-P-C	9,0	8	14	290	290	290	340	340	340	930	70	Saunova	125	135	1900		

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM MIN MAX (m³)	SIZE OF HEATER (w/ WALL INSTALLATION) (mm)									STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
			MIDDLE		WALL		CORNER		HEIGHT							
			LENGTH	WIDTH	LENGTH	WIDTH	LENGTH	WIDTH								
CUB3-45NS-P-C	4,5	3 6	290	290	290	340	340	340	930	75	separate	100	100	1900		
CUB3-60NS-P-C	6,0	5 9	290	290	290	340	340	340	930	75	separate	100	100	1900		
CUB3-75NS-P-C	7,5	7 13	290	290	290	340	340	340	930	75	separate	100	135	1900		
CUB3-90NS-P-C	9,0	8 14	290	290	290	340	340	340	930	75	separate	125	135	1900		

Built-in (NB)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER (w/ WALL INSTALLATION)								STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES		
				MIN		MAX		(mm)								
				MIDDLE	WALL	CORNER							A	AA	B	
				LENGTH	WIDTH	LENGTH	WIDTH	LENGTH	WIDTH	HEIGHT						
CUB3-45NB-P-C	4,5	3	6	290	290	290	340	340	340	930	75	built-in (8+4h)	100	100	1900	
CUB3-60NB-P-C	6,0	5	9	290	290	290	340	340	340	930	75	built-in (8+4h)	100	100	1900	
CUB3-75NB-P-C	7,5	7	13	290	290	290	340	340	340	930	75	built-in (8+4h)	100	135	1900	
CUB3-90NB-P-C	9,0	8	14	290	290	290	340	340	340	930	75	built-in (8+4h)	125	135	1900	

Heater Accessories (Optional)

Integration Collars for Cubes



Wooden Collar for CUB3
Middle Installation
Hemlock (H)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-W3-H	540 540 45



Stainless Steel Collar for
CUB3 Middle Installation

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-ST3	525 525 45



Soapstone Collar for
CUB3 Middle Installation

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-S3	535 535 45



Wooden Collar for CUB3
Middle Installation
Hemlock (H)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-GUARD-W3-H	530 530 90



Wooden Collar for CUB3
Wall Installation
Hemlock (H)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-W3-WL-H	465 465 45



Stainless Steel Collar for CUB3
Wall Installation

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-ST3-WL	460 460 45



Soapstone Collar for
CUB3 Wall Installation

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-S3-WL	465 535 45



Wooden Collar for CUB3
Wall Installation
Hemlock (H)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-GUARD-W3-WL-H	460 530 90



Wooden Collar for CUB3
Corner Installation
Hemlock (H)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-W3-CNR-H	540 540 45



Stainless Steel Collar for CUB3
Corner Installation

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-ST3-WL	460 460 45



Soapstone Collar for
CUB3 Corner Installation

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-COLLAR-S3-CNR	465 465 45



Wooden Collar for CUB3
Corner Installation
Hemlock (H)

MODEL	SIZE OF GUARD RAIL LENGTH WIDTH HEIGHT (mm)
CUB-GUARD-W3-CNR-H	460 460 90



PHOENIX

Rising from the ashes, our **Phoenix** heater makes the user feel reborn and refreshed.

The broadening shape, inspired by the Olympic torch, allows more stones to be placed in the top, ensuring the creation of a greater amount of pampering steam.

- » Power range: 4,5 – 18,0kW
- » Available controls: Saunova (Ni2), Saunova/Innova (NS)
- » Stainless steel tubes hold the stones
- » Stone spacer inside to prolong heating elements lifespan
- » Floor standing
- » Can fit from 85kg to 130kg of stones
- » Adjustable legs
- » Optional heater guard and integration collar



Phoenix
(NS)



Phoenix
(Ni2)



Technical Data



Phoenix
(Ni2)



Phoenix
(NS)



Saunova (Ni2)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT			A	B
PNX3-45Ni2-P-C	4,5	3	6		340	375	1100	85	Saunova	100	1900
PNX3-60Ni2-P-C	6,0	5	9		340	375	1100	85	Saunova	125	1900
PNX3-75Ni2-P-C	7,5	7	13		340	375	1100	85	Saunova	125	1900
PNX3-90Ni2-P-C	9,0	8	14		340	375	1100	85	Saunova	150	1900
PNX6-90Ni2-P-C	9,0	8	15		475	525	1175	130	Saunova	150	1900

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM			SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	(m³)	LENGTH	WIDTH	HEIGHT			A	B
PNX3-45NS-P-C	4,5	3	6		340	375	1100	85	separate	100	1900
PNX3-60NS-P-C	6,0	5	9		340	375	1100	85	separate	125	1900
PNX3-75NS-P-C	7,5	7	12		340	375	1100	85	separate	125	1900
PNX3-90NS-P-C	9,0	8	14		340	375	1100	85	separate	150	1900
PNX6-90NS-P-C	9,0	8	15		475	525	1175	130	separate	150	1900
PNX6-105NS-P	10,5	9	16		475	525	1175	130	separate	150	1900
PNX6-120NS-P	12,0	11	18		475	525	1175	130	separate	150	2100
PNX6-150NS-P	15,0	14	25		475	525	1175	130	separate	150	2100
PNX6-180NS-P	18,0	18	28		475	525	1175	130	separate	175	2100

Heater Accessories (Optional)

Integration Collars for Phoenix



Stainless steel



Stainless steel



Wooden
Hemlock (H)



Soapstone



Wooden
Hemlock (H)

Heater Guards for Phoenix

MODEL	LENGTH	SIZE OF GUARD RAIL	HEIGHT
TH-COLLAR-V2-ST4	420	420	105

MODEL	LENGTH	SIZE OF GUARD RAIL	HEIGHT
TH-COLLAR-ST4	540	540	45
TH-COLLAR-ST9	640	640	45

MODEL	LENGTH	SIZE OF GUARD RAIL	HEIGHT
TH-COLLAR-W4-H	200	495	150
TH-COLLAR-W9-H	233	608	150

MODEL	LENGTH	SIZE OF GUARD RAIL	HEIGHT
TH-COLLAR-S4	560	560	45
TH-COLLAR-S9	690	690	45

MODEL	LENGTH	SIZE OF GUARD RAIL	HEIGHT
PNX-GUARD-W3-A D	560	560	90

MODEL	LENGTH	SIZE OF GUARD RAIL	HEIGHT
PNX3			
PNX6			



HEATERKING

Heaterking heaters by Finnish Stefan Lindfors emanate king-size heat and feature a bold design cover.

Its unique, stainless steel Junglefire pattern decorates the cover with style.

The Heaterking comes in Round, Wall, and Corner models.



- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Casing: Stainless steel with intricate Junglefire pattern
- » Stone spacer inside to prolong heating elements lifespan
- » Can fit from 60kg to 360kg of stones
- » Adjustable legs
- » Optional heater guard









- » Power range: 3,0 – 24,0kW
- » Available controls: Saunova/Innova (NS)
- » Casing: Stainless steel with intricate Junglefire pattern
- » Stone spacer inside to prolong heating elements lifespan
- » Can fit from 60kg to 250kg of stones
- » Wall type stainless steel casing
- » Adjustable legs
- » Heat reflector included



- » Power range: 3,5 – 12,0kW
- » Available controls: Saunova/Innova (NS)
- » Casing: Stainless steel with intricate Junglefire pattern
- » Stone spacer inside to prolong heating elements lifespan
- » Can fit from 45kg to 160kg of stones
- » Corner-type stainless steel casing
- » Adjustable legs
- » Heat reflector included

Technical Data

Saunova/Innova (NS)



HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
DRFT2-30NS-P	3,0	2	4	250	250	1325	70	60	separate	150	1900
DRFT3-35NS-P-C	3,5	3	6	250	250	1325	70	60	separate	100	1900
DRFT3-45NS-P-C	4,5	3	6	250	250	1325	70	60	separate	100	1900
DRFT3-60NS-P-C	6,0	5	8	250	250	1325	70	60	separate	150	1900
DRFT4-60NS-P-C	6,0	5	9	295	295	1325	105	90	separate	100	1900
DRFT5-80NS-P-C	8,0	8	14	295	295	1325	105	90	separate	200	1900
DRFT5-90NS-P-C	9,0	8	14	295	295	1325	105	90	separate	200	1900
DRFT6-80NS-P-C	8,0	7	14	355	355	1325	160	100	separate	100	1900
DRFT6-90NS-P-C	9,0	8	15	355	355	1325	160	100	separate	100	1900
DRFT6-105NS-P	10,5	9	16	355	355	1325	160	100	separate	150	1900
DRFT6-120NS-P	12,0	11	18	355	355	1325	160	100	separate	200	2100
DRFT9-105NS-P	10,5	10	16	425	425	1325	230	165	separate	150	2100
DRFT9-120NS-P	12,0	11	20	425	425	1325	230	165	separate	150	2100
DRFT9-150NS-P	15,0	14	25	425	425	1325	230	165	separate	200	2100
DRFT9-180NS-P	18,0	18	28	425	425	1325	230	165	separate	200	2100
DRFT12-150NS-P	15,0	15	26	525	525	1325	360	220	separate	200	2300
DRFT12-180NS-P	18,0	18	30	525	525	1325	360	220	separate	200	2300
DRFT12-210NS-P	21,0	22	35	525	525	1325	360	220	separate	200	2300
DRFT12-240NS-P	24,0	24	40	525	525	1325	360	220	separate	200	2300

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
DRFT3-35NS-WL-P-C	3,5	3	6	*220	395	1440	80	50	separate	100	1900
DRFT3-45NS-WL-P-C	4,5	3	6	*220	395	1440	80	50	separate	100	1900
DRFT3-60NS-WL-P-C	6,0	5	8	*220	395	1440	80	50	separate	100	1900
DRFT6-80NS-WL-P-C	8,0	7	14	*300	550	1440	160	105	separate	100	1900
DRFT6-90NS-WL-P-C	9,0	8	15	*300	550	1475	160	105	separate	100	1900
DRFT6-105NS-WL-P	10,5	9	16	*300	550	1475	160	105	separate	100	1900
DRFT6-120NS-WL-P	12,0	11	18	*300	550	1475	160	105	separate	100	2100
DRFT9-105NS-WL-P	10,5	10	16	*350	650	1510	180	115	separate	100	2100
DRFT9-120NS-WL-P	12,0	11	20	*350	650	1510	180	115	separate	100	2100
DRFT9-150NS-WL-P	15,0	14	25	*350	650	1510	180	115	separate	100	2100
DRFT9-180NS-WL-P	18,0	18	28	*350	650	1510	180	115	separate	100	2100
DRFT12-150NS-WL-P	15,0	15	26	*420	790	1545	250	165	separate	100	2300
DRFT12-180NS-WL-P	18,0	18	30	*420	790	1545	250	165	separate	100	2300
DRFT12-210NS-WL-P	21,0	22	35	*420	790	1545	250	165	separate	100	2300
DRFT12-240NS-WL-P	24,0	24	40	*420	790	1545	250	165	separate	100	2300

HEATER MODEL	KW	SAUNA ROOM		SIZE OF HEATER			STONES (KG)		CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX	LENGTH	WIDTH	HEIGHT	Without Stone Spacer	With Stone Spacer		A	B
DRFT3-35NS-CNR-P-C	3,5	3	5	*300	300	1410	70	45	separate	100	1900
DRFT3-45NS-CNR-P-C	4,5	3	5	*300	300	1410	70	45	separate	100	1900
DRFT6-80NS-CNR-P-C	6,0	5	8	*300	300	1410	70	45	separate	100	1900
DRFT6-80NS-CNR-P-C	8,0	7	14	*410	410	1430	160	100	separate	100	1900
DRFT6-90NS-CNR-P-C	9,0	8	15	*410	410	1430	160	100	separate	100	1900
DRFT6-105NS-CNR-P	10,5	9	16	*410	410	1430	160	100	separate	100	1900
DRFT6-120NS-CNR-P	12,0	11	18	*410	410	1430	160	100	separate	100	2100

Heater Accessories (Optional)

Heatering Round Heater Guards



Wooden Heater Guard for DRFT 2 and 3 H.E Round
Hemlock (H)

MODEL	LENGTH	WIDTH	HEIGHT
DRFT-W2-H	510	510	105



Wooden Heater Guard for DRFT 4 and 5 H.E Round
Hemlock (H)

MODEL	LENGTH	WIDTH	HEIGHT
DRFT-W4-H	560	560	105



Wooden Heater Guard for DRFT 6 H.E Round
Hemlock (H)

MODEL	LENGTH	WIDTH	HEIGHT
DRFT-W6-H	620	620	105



Wooden Heater Guard for DRFT 9 H.E Round
Hemlock (H)

MODEL	LENGTH	WIDTH	HEIGHT
DRFT-W9-H	690	690	105



Wooden Heater Guard for DRFT 12 H.E Round
Hemlock (H)

MODEL	LENGTH	WIDTH	HEIGHT
DRFT-W12-H	790	790	105



FIBERJUNGLE




Fiberjungle by Finnish designer Stefan Lindfors features a unique design – coated with eye-catching black fiber.

While bold and gorgeous, the heater also has a cool-to-touch coating for increased safety around the heater.

- » Power range: 4,5 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Adjustable legs



Technical Data

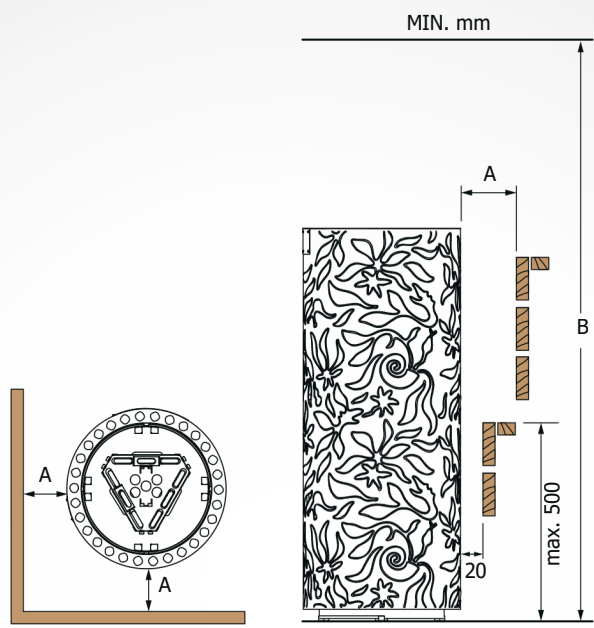

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES	
		MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT			A	B
DRF3-45NS-P-C	4,5	3	6	300	300	930	60	separate	100	1900
DRF3-60NS-P-C	6,0	5	9	300	300	930	60	separate	100	1900
DRF3-75NS-P-C	7,5	7	12	300	300	930	60	separate	100	1900
DRF3-90NS-P-C	9,0	8	13	300	300	930	60	separate	100	1900



SAuna WORld



sawo.com



SAWO Sauna



Sawo Inc.