



COMBI

HEATER SERIES



SAuna World

 sawo.com

   SAWO Sauna

 Sawo Inc.



Taurus D Combi

Thanks to the **Taurus D Combi**, the wellness experience is now even easier to personalize. The heater combines a steamer with the Taurus D innovation: two or more heating elements options.

With the Taurus D Combi, bathers can enjoy a traditional or a steam sauna experience. It comes with a scent basin, so the user can rejuvenate in therapeutic steam infused with their favorite essential oils and fragrances.

Using the heater is as hassle-free as it gets. It features a water level detection system that signals when the water level is low, similarly to other Combi heaters. The heater's auto-refill feature can also be activated for maximum convenience.






Taurus D Combi
(NS)

- » Power range: 9,0 – 36,0kW
- » Available controls: Saunova/Innova (NS)
- » Black steel casing
- » Automatic shut-off in case of overheating
- » Built-in aroma cups
- » Adjustable legs
- » Optional heater guard
- » Optional auto refill for automatically filled water tank



Technical Data

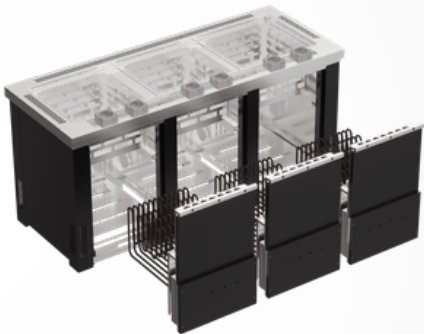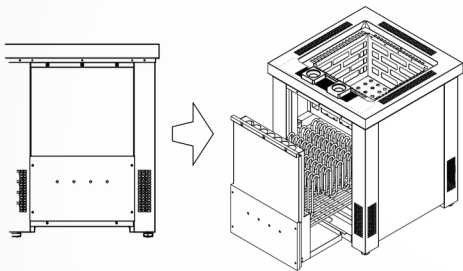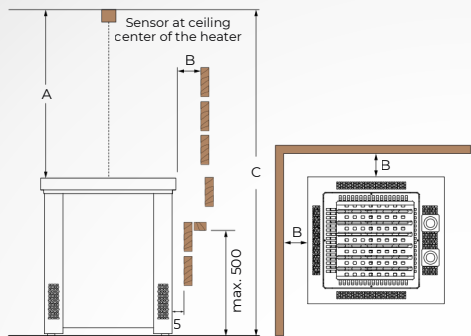

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements.

TRDC-270/300/330/360NS-G-P

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES		
			MIN	MAX	LENGTH	WIDTH (mm)	HEIGHT			A	B	C
TRDC-90/120NS-G-P	9,0 12,0	1 X 2,0	8	18	555	555	690	50	separate	1210	5/*50	1900
TRDC-150/180NS-G-P	15,0 18,0	1 X 2,0	13	29	555	705	690	65-75	separate	1410	5/*50	2100
TRDC-180/210/240NS-G-P	18,0 21,0 24,0	2 X 2,0	18	42	555	970	690	90-100	separate	1410	5/*50	2100
TRDC-270/300/330/360NS-G-P	27,0 30,0 33,0 36,0	3 X 2,0	32	75	555	1385	690	150	separate	1410	5/*50	2100



Nordex Pro Combi


Building on the Nordex tradition, the **Nordex Pro Combi** introduces an enhanced design that combines efficient heating with the added comfort of steam. An integrated water tank delivers gentle humidity, while the separated stone and element design enhances durability.

The Nordex Pro Combi's pull-out cassette tray simplifies maintenance, and the model can be paired with up to two additional units for a maximum of 27,0kW + 6,0kW in larger sauna rooms.





Nordex Pro Combi
(NS)

- » Power range: 6,0 – 9,0kW
- » Available controls:
Saunova/Innova (NS)
- » Built-in aroma cups
- » Adjustable legs
- » Separate water tank with 0,8kW
steam generator

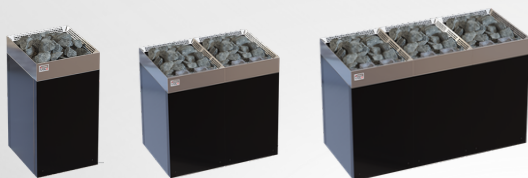

Technical Data

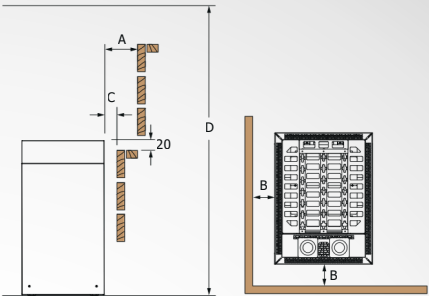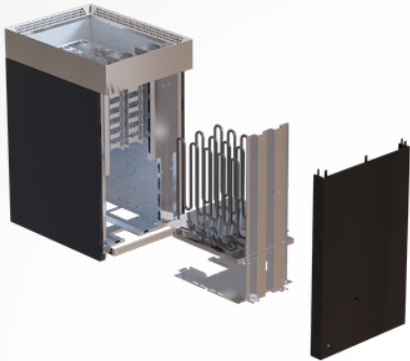

Nordex Pro Combi
Connection Kit

The pull-out tray allows the user to easily change, service, or check the heating elements. This also makes replacing the heater stones easy, as they do not come into contact with the heating elements

The Nordex Pro Combi Connection Kit* is required in order to connect two or more Pros.
**sold separately*

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX (m³)	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRNC-PRO-60NS-BL-Z-C	6,0	1 x 0,8	5	9	500	370	705	60	separate	80	80	20	1900
NRNC-PRO-80NS-BL-Z-C	8,0	1 x 2,0	7	13	500	370	705	60	separate	80	80	20	1900
NRNC-PRO-90NS-BL-Z-C	9,0	1 x 2,0	8	14	500	370	705	60	separate	80	80	20	1900

Heater Accessories (Optional)



Nordex Pro Combi Heater Guard
Hemlock (H)


MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH (mm)	HEIGHT
NRNC-PRO-GUARD-W-H	430	560	85



Nordex S

Combi

The **Nordex S Combi** is now available in a steamier version. Balance the intense heat with an additional water tank for more steam. Also available with a black metal casing.



- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW or 2,0kW steam generator
- » Built-in aroma cups
- » Adjustable legs

Heater Accessories (Optional)



Saunova/Innova (NS)

MODEL	SIZE OF GUARD RAIL		
	LENGTH	WIDTH	HEIGHT
NRNSC-GUARD-W-H	450	412	88

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
NRNSC-60NS-Z-C	6,0	1 x 0,8	5	9	360	395	710	18 - 25	separate	5	50	5	1900
NRNSC-60NS-BL-Z-C	6,0	1 x 0,8	5	9	360	395	710	18 - 25	separate	5	50	5	1900
NRNSC-80NS-Z-C	8,0	1 x 2,0	7	13	360	395	710	18 - 25	separate	5	80	5	1900
NRNSC-80NS-BL-Z-C	8,0	1 x 2,0	7	13	360	395	710	18 - 25	separate	5	80	5	1900
NRNSC-90NS-Z-C	9,0	1 x 2,0	8	14	360	395	710	18 - 25	separate	5	80	5	1900
NRNSC-90NS-BL-Z-C	9,0	1 x 2,0	8	14	360	395	710	18 - 25	separate	5	80	5	1900



Nordex Combi

Nordex Combi adds humidity to the heat with its water tank. It is available with stainless steel or black metal casing, and compatible with separate Saunova and Innova (NS) controls.

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW or 2,0kW steam generator
- » Built-in aroma cups




Nordex Combi
(NS)



Nordex Combi Black
(NS)

Technical Data

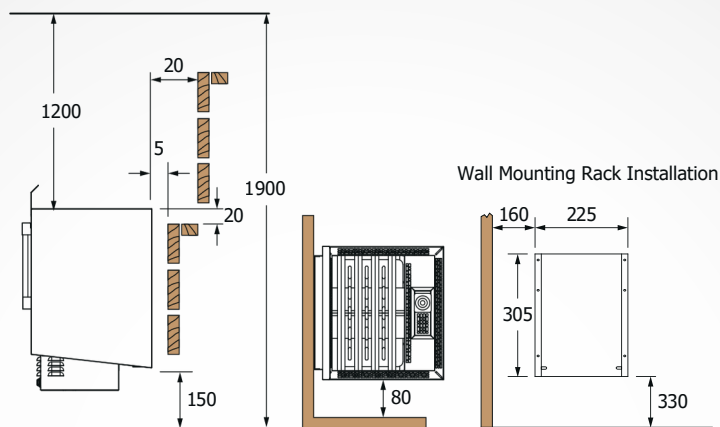

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
			MIN	MAX	LENGTH	WIDTH	HEIGHT		
			(m³)		(mm)				
NRNC-60NS-Z-C NRNC-60NS-BL-Z-C	6,0	1 x 0,8	5	9	**385	400	*610	22	Innova
NRNC-80NS-Z-C NRNC-80NS-BL-Z-C	8,0	1 x 2,0	7	13	**385	400	*610	22	Innova
NRNC-90NS-Z-C NRNC-90NS-BL-Z-C	9,0	1 x 2,0	8	14	**385	400	*610	22	Innova

*Depth when installed to the wall.

**Reflector not included.



Nordex Mini Combi

The ultra-compact **Nordex Mini Combi** adds humidity to the heat with its water tank. It is available with stainless steel or black metal casing, and compatible with separate Saunova (NS) and Innova (NS) controls.

- » Power range: 3,0 – 3,6kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 0,8kW steam generator
- » Built-in aroma cups




Nordex Mini Combi (NS)



Nordex Mini Combi Black (NS)

Technical Data

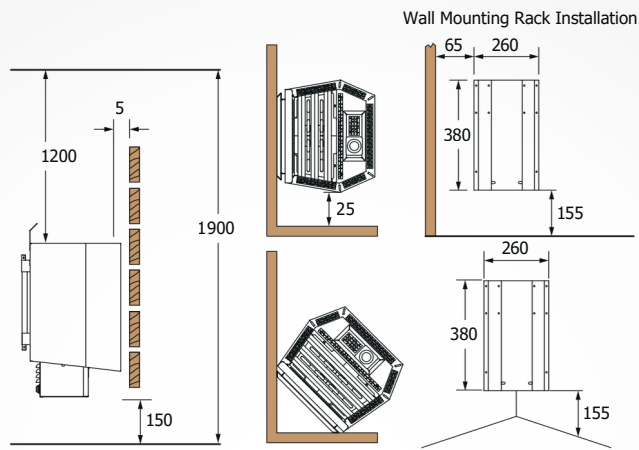

Saunova/Innova (NS)

HEATER MODEL	kW	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
			MIN	MAX	LENGTH	WIDTH	HEIGHT		
NRMC-30NS-Z	3,0	1 x 0,8	2	4	*300	345	**525	8–10,5	separate
NRMC-36NS-Z	3,6	1 x 0,8	3	6	*300	345	**525	8–10,5	separate

*Depth when installed to the wall.

**Reflector not included.



Mini Combi

Mini Combi combines a regular sauna experience with a water tank for increased humidity. It is available with cool-to-touch fiber-coating.

- » Power range: 3,0 – 3,6kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 1,0kW steam generator
- » Built-in aroma cups




Mini Combi
Fibercoated
(NS)



Mini Combi
(NS)

Technical Data

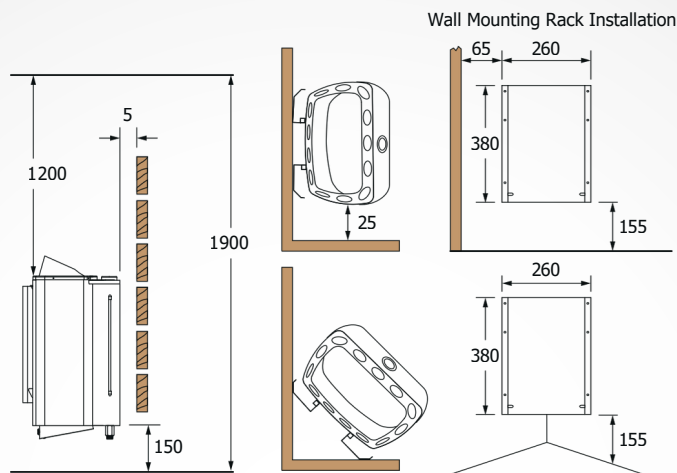

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL
			MIN	MAX	LENGTH	WIDTH	HEIGHT		
MNC-30NS-P	3,0	1 x 1,0	2	4	**330	260	*500	8 – 10,5	separate
MNC-30NS-P-F	3,0	1 x 1,0	2	4	**330	260	*500	8 – 10,5	separate
MNC-36NS-P	3,6	1 x 1,0	3	6	**330	260	*500	8 – 10,5	separate
MNC-36NS-P-F	3,0	1 x 1,0	3	6	**330	260	*500	8 – 10,5	separate

*Depth when installed to the wall.

**Reflector not included.



Savonia Combi

Savonia Combi offers the best of both worlds: the heat of a Savonia and a water tank for more steam and humidity. It is available with cool-to-touch fiber coating and an auto-refill function for the water tank.

- » Power range: 9,0 – 18,0kW
- » Available controls: Saunova/Innova (NS)
- » Built-in aroma cups
- » Separate water tank with 1,0kW or 2,0kW steam generator
- » Adjustable legs
- » Optional: auto-refill feature for automatically refilling the water tank




Savonia Combi
Fibercoated
(NS)



Savonia Combi
(NS)

Technical Data

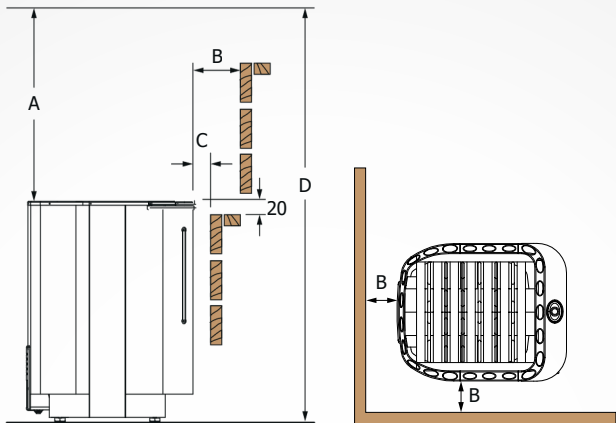

Saunova/Innova (NS)

HEATER MODEL	KW HEATER	KW TANK	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX (m³)	LENGTH	WIDTH (mm)	HEIGHT			A	B	C	D
SAVC-90NS SAVC-90NS-Z-F	9,0	1 x 2,0	8	14	510	420	655	40-50	separate	1200	110	50	1900
SAVC-105NS SAVC-105NS-Z-F	10,5	1 x 2,0	9	15	510	420	655	40-50	separate	1200	120	60	1900
SAVC-120NS SAVC-120NS-Z-F	12,0	1 x 2,0	10	18	510	420	655	40-50	separate	1400	130	70	2100
SAVC-150NS SAVC-120NS-Z-F	15,0	2 x 2,0	13	23	715	420	655	60-75	separate	1400	160	100	2100
SAVC-180NS SAVC-120NS-Z-F	18,0	2 x 2,0	17	29	715	420	655	60-75	separate	1400	160	100	2100



Scandia Combi

Scandia Combi heater comes with a water tank for increased humidity and an aroma cup for using sauna scents. Available with cool-to-touch fiber coating, and compatible with Saunova or Innova controls (NS).

- » Power range: 6,0 – 9,0kW
- » Available controls: Saunova/Innova (NS)
- » Separate water tank with 1,0kW or 2,0kW steam generator
- » Built-in aroma cups




Scandia Combi
(NB)



**Scandia Combi
Fibercoated**
(NB)

Technical Data

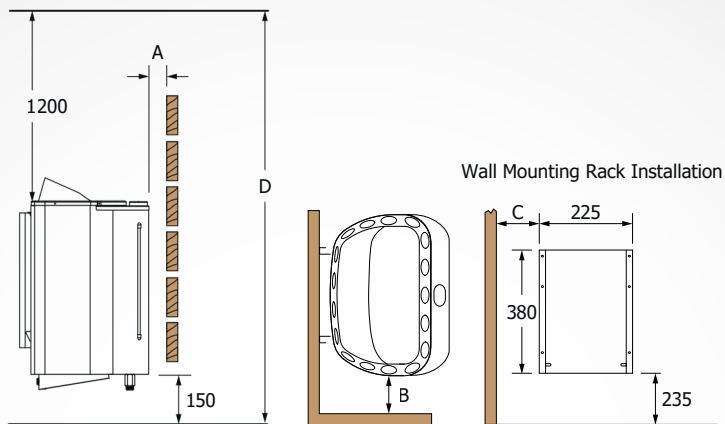

Saunova/Innova (NS)

HEATER MODEL	kW	SAUNA ROOM		SIZE OF HEATER			STONES (kg)	CONTROL	MINIMUM SAFETY DISTANCES			
		MIN	MAX	LENGTH	WIDTH	HEIGHT			A	B	C	D
SCAC-60NS-P-C SCAC-60NS-P-F-C	6,0	5	9	*365	410	595	18–22	separate	5	50	135	1900
SCAC-80NS-P-C SCAC-80NS-P-F-C	8,0	7	13	*365	410	595	18–22	separate	5	50	135	1900
SCAC-90NS-P-C SCAC-90NS-P-F-C	9,0	8	14	*365	410	595	18–22	separate	5	50	135	1900

*Depth when installed to the wall.



Nimbus Combi


Nimbus Combi ramps up the steam with its water tank for a perfect balance of heat and humidity. The heater is compatible with Saunova and Innova controls (NS).

- » Power range: 9,0 – 18,0kW
- » Available controls:
 - Saunova/Innova (NS)
- » Built-in aroma cups
- » Optional: auto-refill feature for automatically refilling the water tank



Nimbus Combi
(NS)

Technical Data

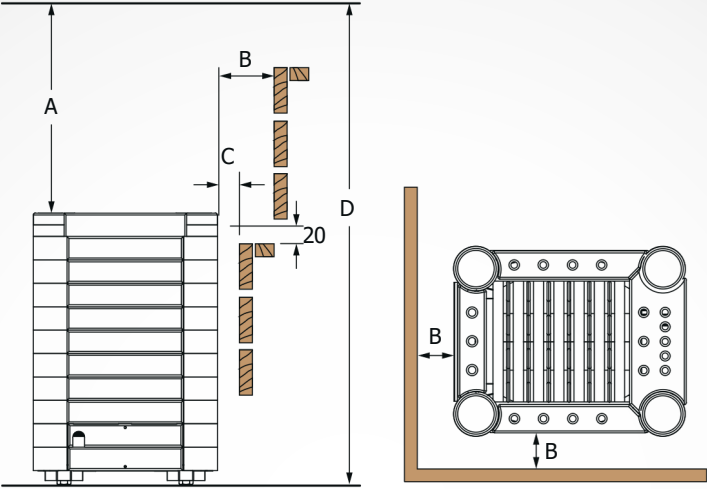

Saunova/Innova (NS)

HEATER MODEL	kW HEATER	kW TANK	SAUNA ROOM		SIZE OF HEATER			STONES	SOAPSTONE S (KG)	CONTROL	MINIMUM SAFETY DISTANCES			
			MIN	MAX	LENGTH	WIDTH	HEIGHT				A	B	C	D
			(m³)		(mm)									
NIMC-90NS-P	9,0	1 x 2,0	8	14	575	470	690	40-50	90	separate	1200	50	30	1900
NIMC-105NS-P	10,5	1 x 2,0	9	15	575	470	690	40-50	90	separate	1200	50	30	1900
NIMC-120NS-P	12,0	1 x 2,0	10	18	575	470	690	40-50	90	separate	1400	130	70	2100
NIMC-150NS-P	15,0	2 x 2,0	13	23	575	470	690	60-75	120	separate	1400	160	100	2100
NIMC-180NS-P	18,0	2 x 2,0	17	29	575	470	690	60-75	120	separate	1400	160	100	2100



SAuna WORld



sawo.com



SAWO Sauna



Sawo Inc.