



STEAM SAUNA



SAuna WORld

 sawo.com

   SAWO Sauna

 Sawo Inc.




STN-S

Steam Generator

Built for power and performance, the **STN-S** steam generator features more flexible installation options. It has a separate electronics compartment, meaning that the generator can be installed in a different location than the electronics. Its cassette-style heating elements simplify cleaning and maintenance of the tank, while aroma, fan, and dimmer controls let you customize every steam session.

Extra steam is just a button away with the demand button feature that can be installed inside or outside of the steam room. Error codes appear on the control for quick troubleshooting. Up to five units can be linked for a maximum of 75,0kW output, all managed from a single SAWO control

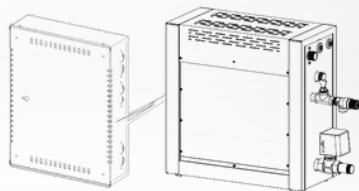

STN-S Overview



2 Heating Elements

- » Power range: 3,0 – 5,0kW
- » Steam output: up to 6,7kg/hr
- » Piping and electrical cables can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface



3 Heating Elements

- » Power range: 4,5 – 7,5kW
- » Steam output: up to 7,5kg/hr
- » Piping and electrical cables can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface



6 Heating Elements

- » Power range: 9,0 – 15,0kW
- » Steam output: up to 20kg/hr
- » Piping and electrical cables can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » 2 Steam heads included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface

Technical Data

2 Heating Elements

STEAM GENERATOR MODEL	kW	SAUNA ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
		(m³)		(mm)				
STN-S-30-1/2	3,0	3		185	485	560	17	Stainless Touch STN-S 2.0
STN-S-35-1/2	3,5	3,5		185	485	560	17	Stainless Touch STN-S 2.0
STN-S-40-1/2	4,0	4		185	485	560	17	Stainless Touch STN-S 2.0
STN-S-45-1/2	4,5	2	5	185	485	560	17	Stainless Touch STN-S 2.0
STN-S-50-1/2	5,0	2	6	185	485	560	17	Stainless Touch STN-S 2.0

3 Heating Elements

STEAM GENERATOR MODEL	kW	SAUNA ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
		(m³)		(mm)				
STN-S-45-3	4,5	2	5	220	485	560	19	Stainless Touch STN-S 2.0
STN-S-60-3	6,0	3	10	220	485	560	19	Stainless Touch STN-S 2.0
STN-S-60-C1/3	6,0	3	10	220	485	560	19	Stainless Touch STN-S 2.0
STN-S-75-3	7,5	4	15	220	485	560	19	Stainless Touch STN-S 2.0
STN-S-75-C1/3	7,5	4	15	220	485	560	19	Stainless Touch STN-S 2.0

6 Heating Elements

STEAM GENERATOR MODEL	kW	SAUNA ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
		(m³)		(mm)				
STN-S-90-3	9,0	8	20	310	485	560	23	Stainless Touch STN-W 2.0
STN-S-90-C1/3	9,0	8	20	310	485	560	23	Stainless Touch STN-W 2.0
STN-S-120-3	12,0	15	28	310	485	560	23	Stainless Touch STN-W 2.0
STN-S-150-3	15,0	22	40	310	485	560	23	Stainless Touch STN-W 2.0




STN-W

Steam Generator

A heavy-duty performer built for commercial use, the **STN-W** steam generator features a cassette for heating elements that makes cleaning or replacement quick and simple. The generator's aroma, fan, and dimmer controls allow users to fully customize the sauna experience, while an optional demand button delivers an extra burst of steam on command.

Maintenance and installation are straightforward: error codes are shown on the controller screen, and a removable side window provides easy access to the settings board.

The steam outlet can be installed left or right, with the autodrain positioned on the side or bottom. Up to five units can be linked together for a maximum 75,0kW output, all controlled using a single SAWO interface.



STN-W Overview



2 Heating Elements

- » Power range: 3,0 – 5,0kW
- » Steam output: up to 6,7kg/hr
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface

3 Heating Elements

- » Power range: 4,5 – 7,5kW
- » Steam output: up to 7,5kg/hr
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface

6 Heating Elements

- » Power range: 9,0 – 15,0kW
- » Steam output: up to 20kg/hr
- » Own pipe for overpressure valve
- » Auto drain
- » 2 Steam heads included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Stainless steel touch
- » Available controls: STP 2.0 user interface

Technical Data

2 Heating Elements

STEAM GENERATOR MODEL	kW	SAUNA ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX (m³)	LENGTH	WIDTH	HEIGHT (mm)		
STN-W-30-1/2	3,0		3	245	485	560	17	Stainless Touch STN-W 2.0
STN-W-35-1/2	3,5		3,5	245	485	560	17	Stainless Touch STN-W 2.0
STN-W-40-1/2	4,0		4	245	485	560	17	Stainless Touch STN-W 2.0
STN-W-45-1/2	4,5	2	5	245	485	560	17	Stainless Touch STN-W 2.0
STN-W-50-1/2	5,0	2	6	245	485	560	17	Stainless Touch STN-W 2.0

3 Heating Elements

STEAM GENERATOR MODEL	kW	SAUNA ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX (m³)	LENGTH	WIDTH	HEIGHT (mm)		
STN-W-45-3	4,5	2	5	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-45-C1/3	4,5	2	5	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-60-3	6,0	3	10	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-60-C1/3	6,0	3	10	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-75-3	7,5	4	15	280	485	560	19	Stainless Touch STN-W 2.0
STN-W-75-C1/3	7,5	4	15	280	485	560	19	Stainless Touch STN-W 2.0

6 Heating Elements

STEAM GENERATOR MODEL	kW	SAUNA ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX (m³)	LENGTH	WIDTH	HEIGHT (mm)		
STN-W-90-3	9,0	8	20	375	485	560	23	Stainless Touch STN-W 2.0
STN-W-90-C1/3	9,0	8	20	375	485	560	23	Stainless Touch STN-W 2.0
STN-W-120-3	12,0	15	28	375	485	560	23	Stainless Touch STN-W 2.0
STN-W-150-3	15,0	22	40	375	485	560	23	Stainless Touch STN-W 2.0




STN

Steam Generator

Built for the demands of commercial use, the **STN** steam generator combines durability and performance. Its solid stainless-steel construction minimizes corrosion, while a range of optional features, including aroma, fan, and dimmer controls, allow for a personalized steam experience. An optional demand button releases extra steam for 30 seconds when needed.

Troubleshooting is effortless, with error codes displayed directly on the controller screen. The system can be installed in either left or right orientation and linked in series with up to five units for a maximum output of 75,0kW, all controlled through a single SAWO interface.



STN Overview



2 Heating Elements

- » Power range: 3,0 – 5,0kW
- » Steam output: up to 6,7kg/hr
- » Can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Available controls: STP Classic, STP Classic 2.0 and STP Stainless Steel Touch



3 Heating Elements

- » Power range: 4,5 – 7,5kW
- » Steam output: up to 7,5kg/hr
- » Can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » Steam head included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Available controls: STP Classic, STP Classic 2.0 and STP Stainless Steel Touch



6 Heating Elements

- » Power range: 9,0 – 15,0kW
- » Steam output: up to 20kg/hr
- » Can be installed in either side
- » Own pipe for overpressure valve
- » Auto drain
- » 2 Steam heads included
- » Cassette type heating element setup for easy maintenance
- » ¾" steam pipe
- » Available controls: STP Classic, STP Classic 2.0 and STP Stainless Steel Touch

Technical Data

2 Heating Elements

STEAM GENERATOR MODEL	kW	SAUNA ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
STN-30-1/2	3,0		3	185	485	560	17	Touch Classic Classic 2.0
STN-35-1/2	3,5		3,5	185	485	560	17	Touch Classic Classic 2.0
STN-40-1/2	4,0		4	185	485	560	17	Touch Classic Classic 2.0
STN-45-1/2	4,5	2	5	185	485	560	17	Touch Classic Classic 2.0
STN-50-1/2	5,0	2	6	185	485	560	17	Touch Classic Classic 2.0

3 Heating Elements

STEAM GENERATOR MODEL	kW	SAUNA ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
STN-45-3	4,5	2	5	220	485	560	19	Touch Classic Classic 2.0
STN-45-C1/3	4,5	2	5	220	485	560	19	Touch Classic Classic 2.0
STN-60-3	6,0	3	10	220	485	560	19	Touch Classic Classic 2.0
STN-60-C1/3	6,0	3	10	220	485	560	19	Touch Classic Classic 2.0
STN-75-3	7,5	4	15	220	485	560	19	Touch Classic Classic 2.0
STN-75-C1/3	7,5	4	15	220	485	560	19	Touch Classic Classic 2.0

6 Heating Elements


STEAM GENERATOR MODEL	kW	SAUNA ROOM		SIZE OF HEATER			WEIGHT (kg)	CONTROL
		MIN	MAX	LENGTH	WIDTH	HEIGHT		
STN-90-3	9,0	8	20	310	485	560	23	Touch Classic Classic 2.0
STN-90-C1/3	9,0	8	20	310	485	560	23	Touch Classic Classic 2.0
STN-120-3	12,0	15	28	310	485	560	23	Touch Classic Classic 2.0
STN-150-3	15,0	22	40	310	485	560	23	Touch Classic Classic 2.0




STEAM GENERATOR CONTROLS



Steam 2.0
(STP-INFACE-V2)



Steam Stainless Steel Touch
(STP-INFACE-SST)



Steam STE
(STE-INFACE-V2)



Steam 2.0 (STP-INFACE-V2)

- » Thick stainless steel casing
- » LED digital display
- » Scent pump, light dimmer and fan
- » 7,5 meters RJ12 cable with connectors included

Steam Stainless Steel Touch (STP-INFACE-SST)

- » Thick stainless steel casing
- » Animated buttons
- » Compatible for automated household component
- » Emergency alarm provision
- » Standby mode to keep water warm until next session
- » Displays error code
- » Autodrain function
- » Key lock
- » Easy mode available
- » Date and time setup
- » Kilowatt usage counter
- » Decalcifying function
- » Heating Element fail detect
- » Blackout memory
- » Celsius or Fahrenheit temperature unit
- » Autolight
- » Autofan
- » LCD contrast adjustment
- » Scent pump, light dimmer and fan
- » Temperature sensor with wire
- » Optional interface holder
- » 7,5 meters RJ12 cable with connectors included

Steam STE (STE-INFACE-V2)

- » Thick stainless steel casing
- » LED digital display
- » 7,5 meters RJ12 cable with connectors included

Steam Generator Series Connection




Classic 2.0



Stainless Steel Touch

Steam Generator
Control

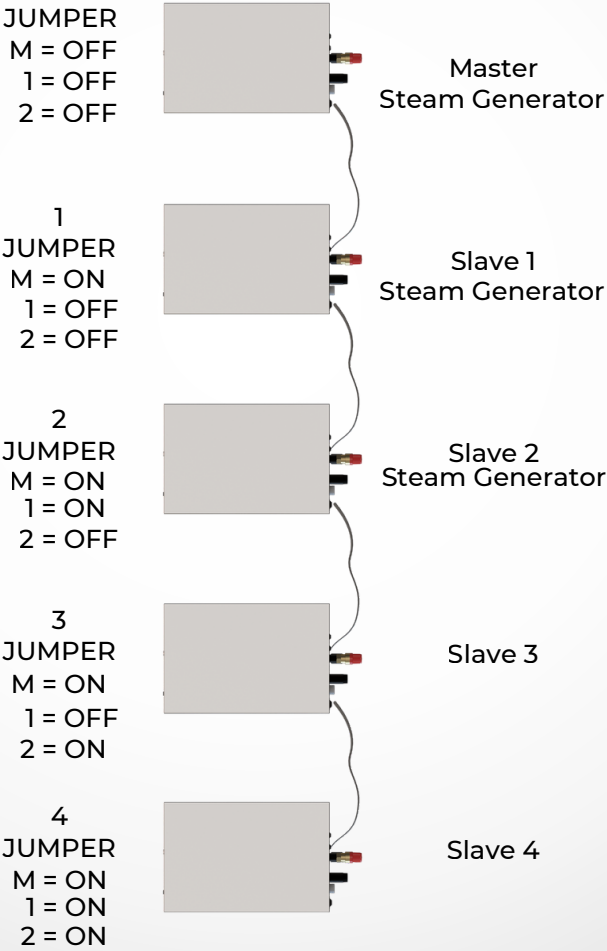

Optional Items

Aroma Oil



code: ARO-EUCA250
ARO-EUCA500
ARO-EUCA4L

Decalcifying Liquid



code: DECAL-250
DECAL-500
DECAL-4L

Steam Doors



Steam Door

code: ST-746-L | R | I
size: 790 x 1890mm




Steam Door

code: ST-749-L | R | I
size: 900 x 2100mm



Optional Items



Installation Stand for STN-W

code: STN-W-STAND2
STN-W-STAND3
STN-W-STAND6

» For easier installation of STN-W
steam generator



Steam Door

code: ST-746-L | R | I
size: 790 x 1890mm




Steam Door

code: ST-749-L | R | I
size: 900 x 2100mm



Aroma Cup

code: STS-PUMP



Steam Head

code: STP-SHEAD



Protective Cover STP-SHEAD

code: STP-COV
size: 88 x 75 x 65mm



SAuna WOrld



sawo.com



SAWO Sauna



Sawo Inc.